

1 SP 5A-8



: 05001K08

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
 : 33
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 2.15-2.30-2.40 A
 : 480-490-480 %
 Cos - : 0.75-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192004
 :
 MEI : 0.50
 ErP : EuP /
 : 11.6
 : 13
 : 16.3 ³
 Danish VVS No.: 388315080
 Swedish RSK No.: 5852970
 Finnish LVI No.: 4762674
 Norwegian NRF no.: 9040873
 C : DK
 : 8413702900

05001K08 SP 5A-8 50

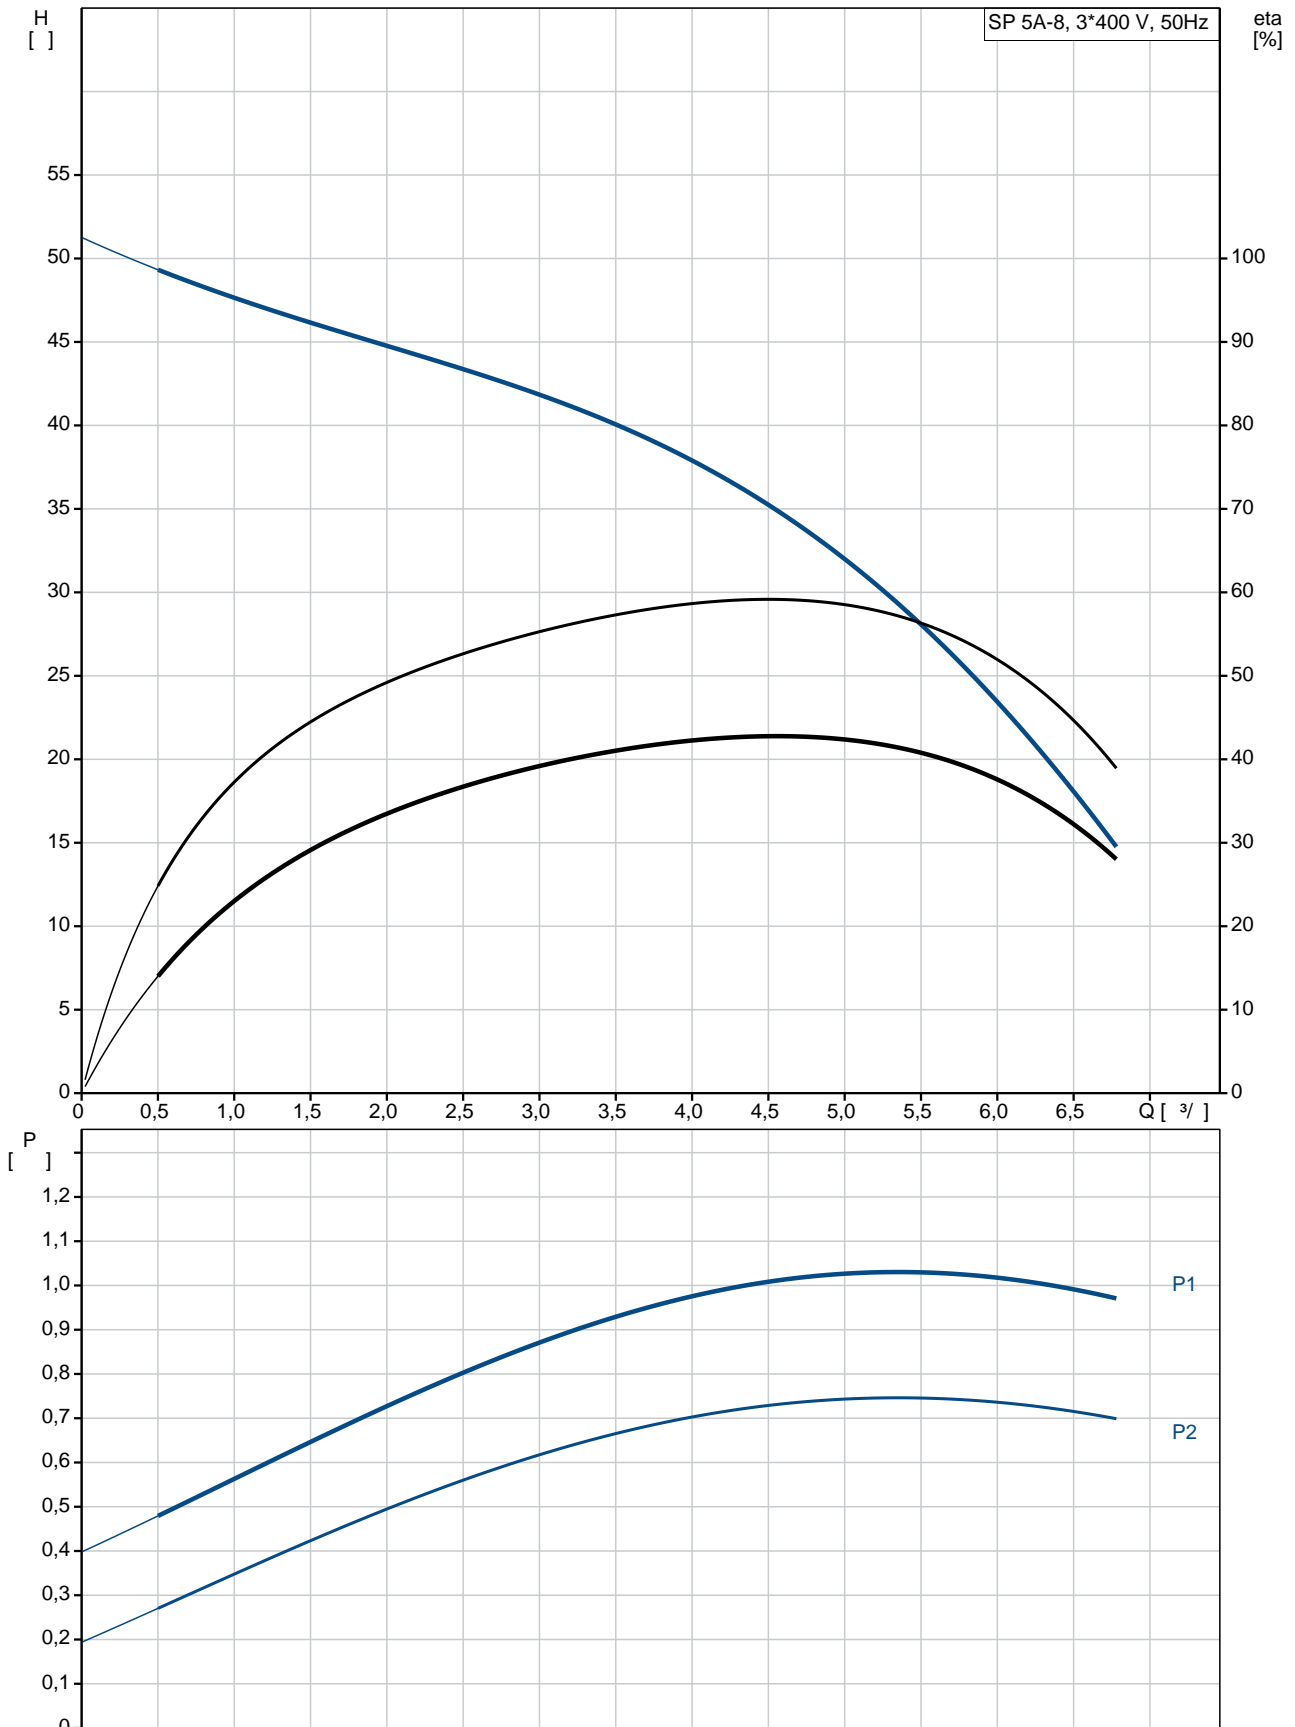


	SP 5A-8
	05001K08
EAN	5708601051470
	2900 /
	5 ^{3/}
	33
	8
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	GRUNDFOS
- P2:	0.75
(2),	0.75
	50 Hz
	3 x 380-400-415
	2.15-2.30-2.40 A
	480-490-480 %
Cos	0.75-0.72-0.65
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192004

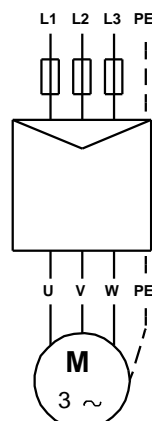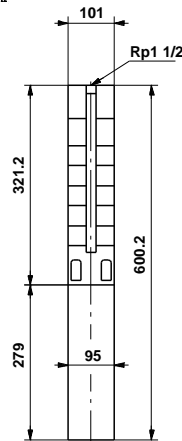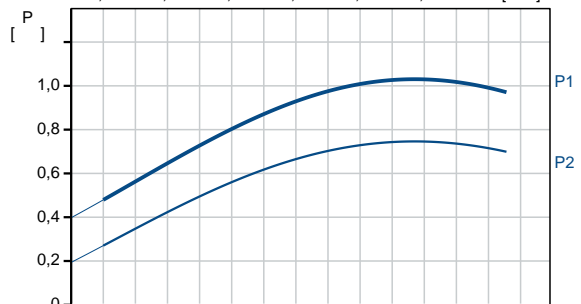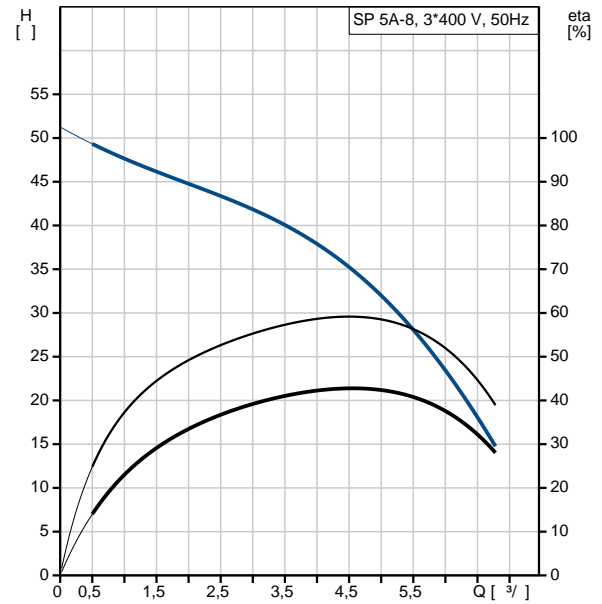

MEI :		0.50
ErP :	EuP	/ .
:		11.6
:		13
:		16.3 ³
Danish VVS No.:		388315080
Swedish RSK No.:		5852970
Finnish LVI No.:		4762674
Norwegian NRF no.:		9040873
C :	DK	
:		8413702900

05001K08 SP 5A-8 50

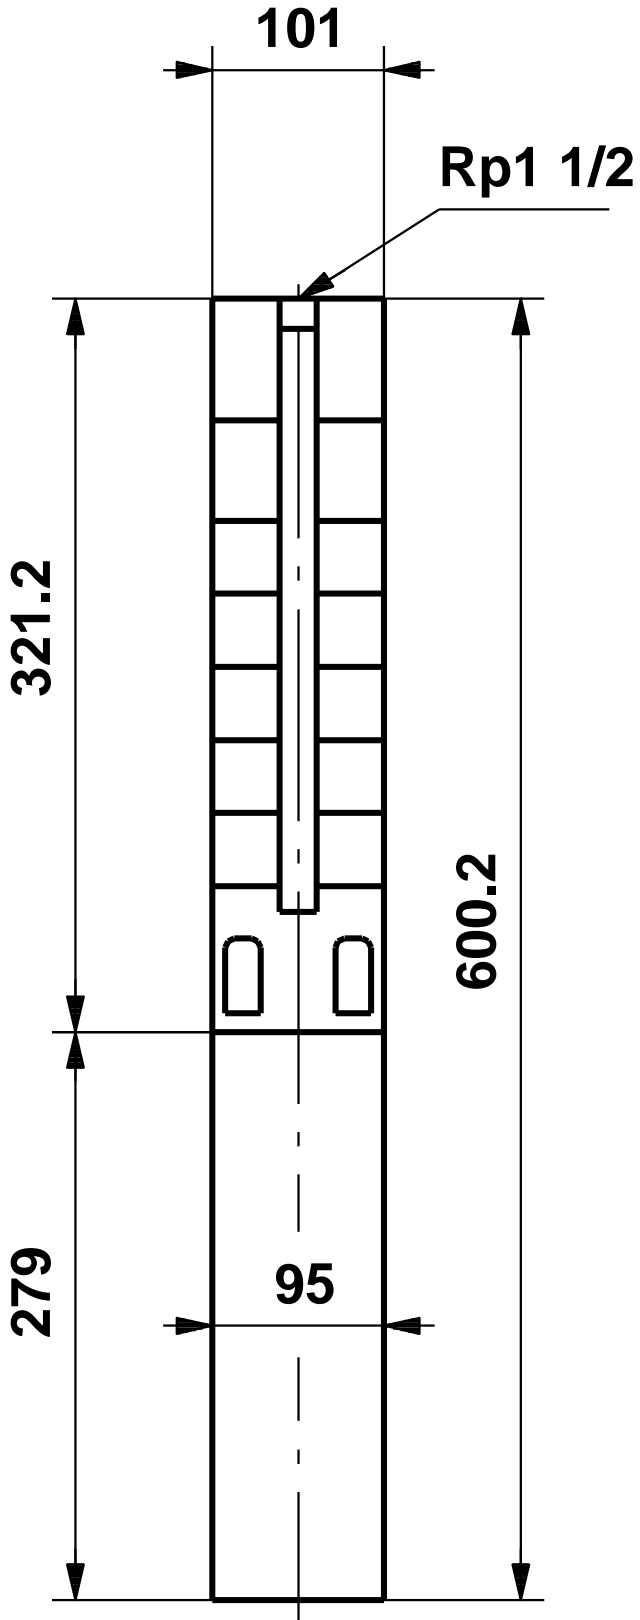

05001K08 SP 5A-8 50



!

[],