

1 SP 5A-12



: 05001K12

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

5 ³/
49

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE


EN 1.4301
AISI AISI 304

EN 1.4301
AISI AISI 304





DIN W.-Nr. 1.4301
AISI 304

:
 : Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 3 x 380-400-415
 : 3.25-3.40-3.65 A
 : 480-480-470 %
 Cos - : 0.76-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192005
 :
 MEI : 0.50
 ErP : EuP /
 : 13.6
 : 15.1
 : 16.3 ³
 Danish VVS No.: 388315120
 Swedish RSK No.: 5852971
 Finnish LVI No.: 4762675
 Norwegian NRF no.: 9040874
 C : DK
 : 8413702900

05001K12 SP 5A-12 50

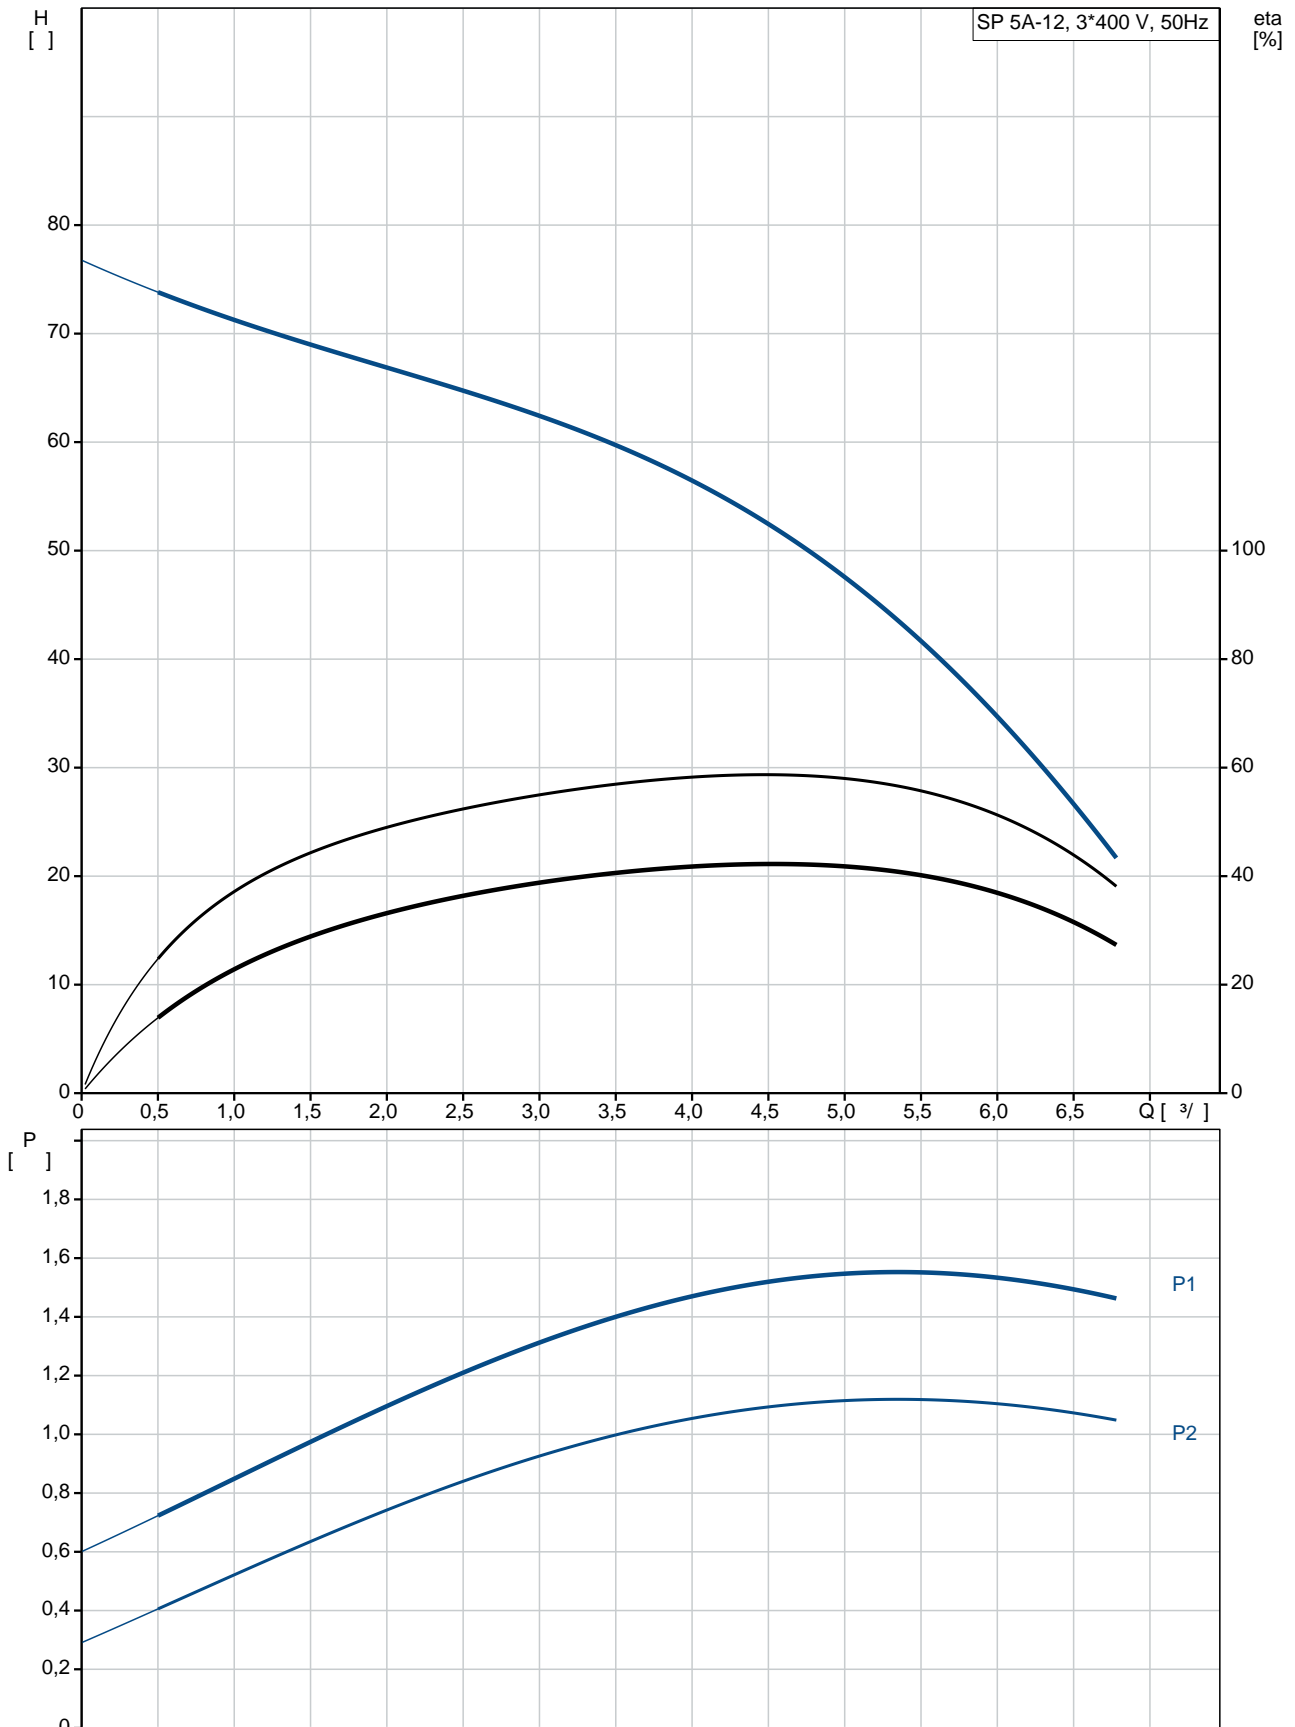


	SP 5A-12
	05001K12
EAN	5708601051487
	2900 /
	5 3/
	49
	12
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	GRUNDFOS
- P2:	1.1
(2),	1.1
	50 Hz
	3 x 380-400-415
	3.25-3.40-3.65 A
	480-480-470 %
Cos	0.76-0.72-0.65
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192005

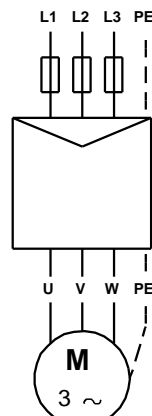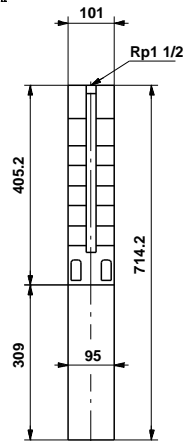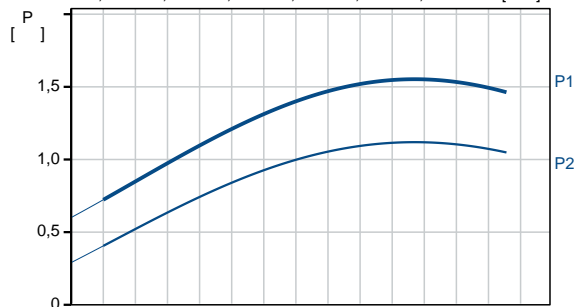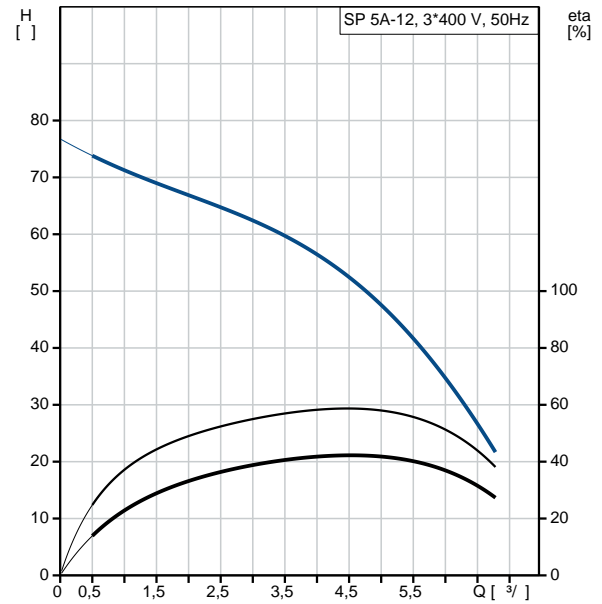


MEI :		0.50
ErP :	EuP	/ .
:		13.6
:		15.1
:		16.3 ³
Danish VVS No.:		388315120
Swedish RSK No.:		5852971
Finnish LVI No.:		4762675
Norwegian NRF no.:		9040874
C :	DK	
:		8413702900

05001K12 SP 5A-12 50

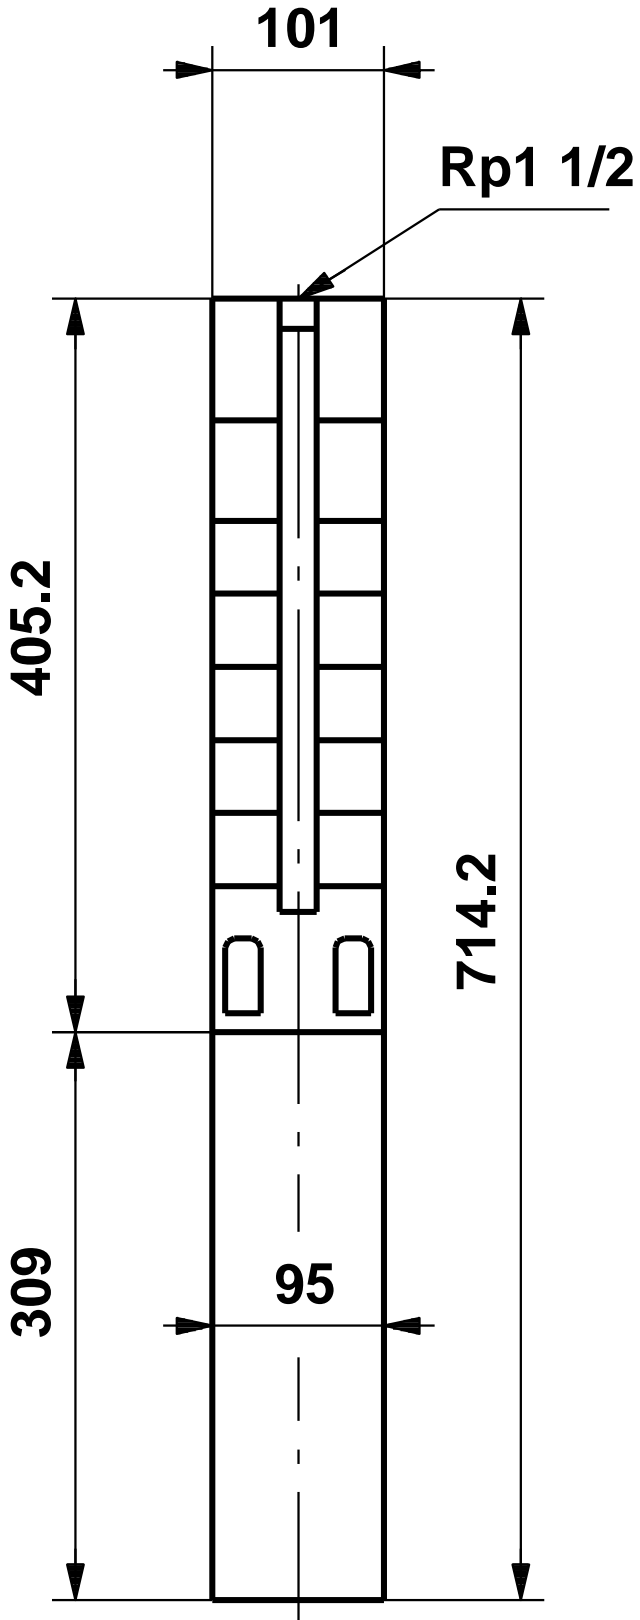

05001K12 SP 5A-12 50

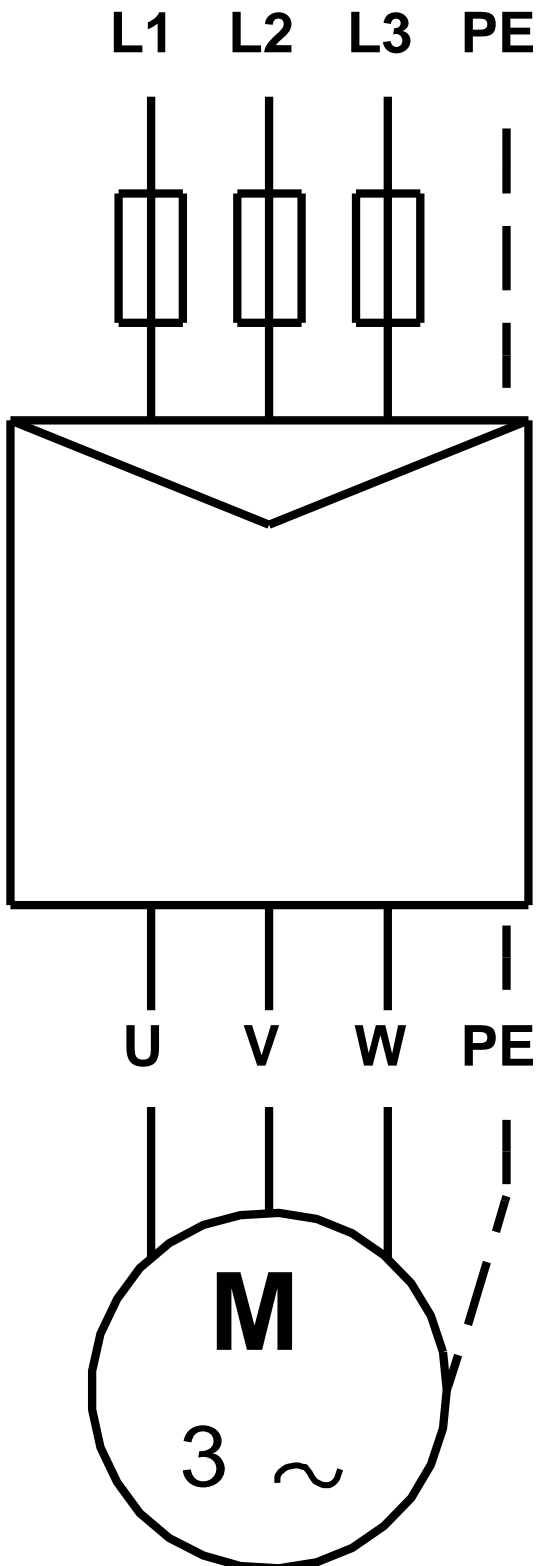

!

[],