

1 SP 5A-17



: 05001K17

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 5 <sup>3</sup>/  
 : 70  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE



EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

:  
 : Rp1 1/2  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 4.10-4.20-4.40 A  
 : 490-500-500 %  
 Cos - : 0.80-0.75-0.70  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192006  
 :  
 MEI : 0.50  
 ErP : EuP /  
 : 16.5  
 : 17.9  
 : 16.3 <sup>3</sup>  
 Danish VVS No.: 388315170  
 Swedish RSK No.: 5852972  
 Finnish LVI No.: 4762676  
 Norwegian NRF no.: 9040875  
 C : DK  
 : 8413702900

## 05001K17 SP 5A-17 50

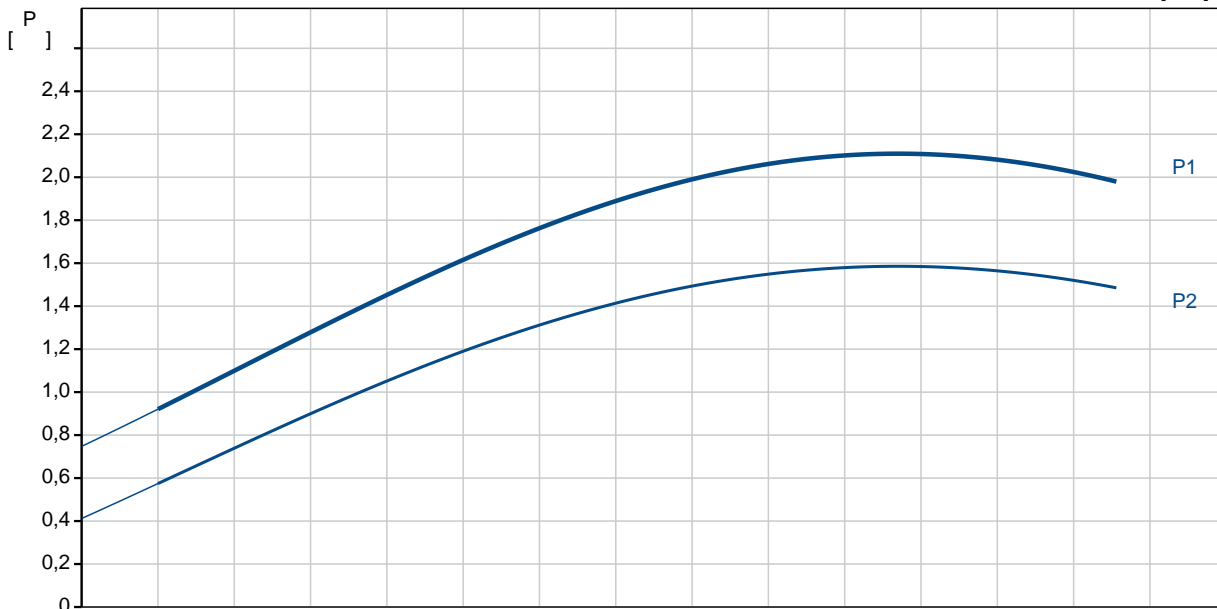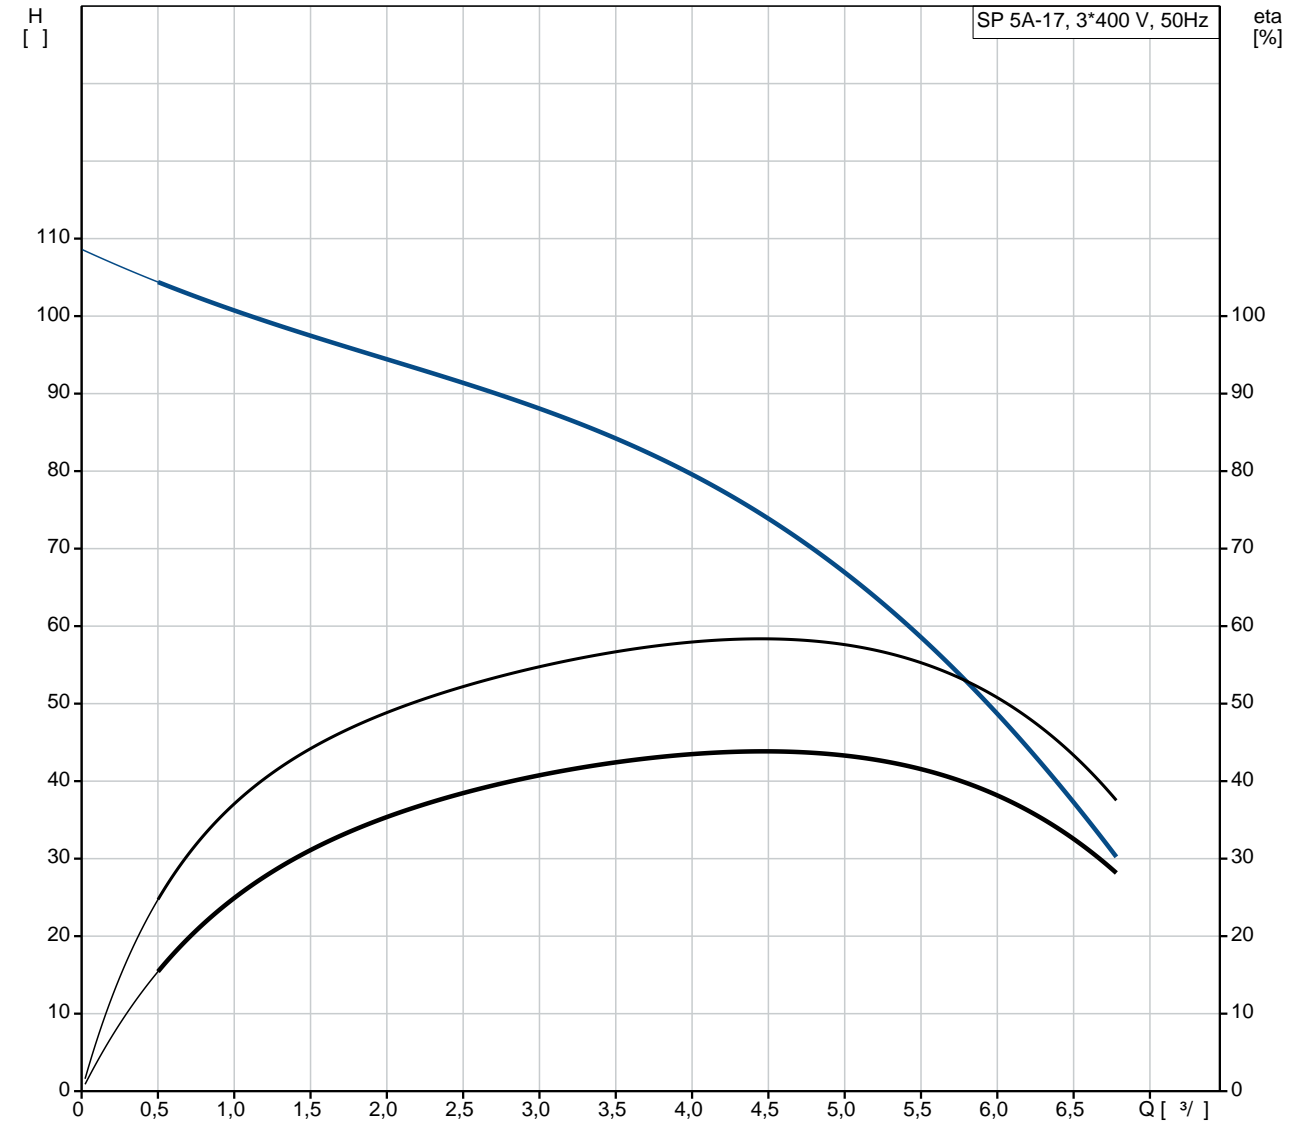

SP 5A-17  
 05001K17  
 EAN : 5708601051494  
 2900 /  
 5 3/  
 70  
 17  
 NONE  
 LIPSEAL  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40  
 SPLINE

EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

Rp1 1/2  
 4 inch

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS402  
 GRUNDFOS





- P2: 1.5  
 ( 2), 1.5

50 Hz  
 3 x 380-400-415  
 4.10-4.20-4.40 A  
 490-500-500 %

Cos : 0.80-0.75-0.70  
 2850-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): B

79192006

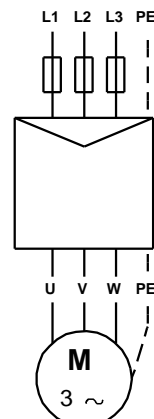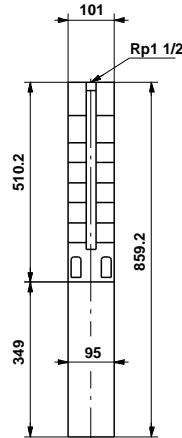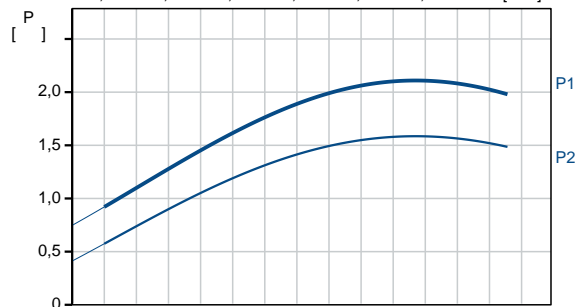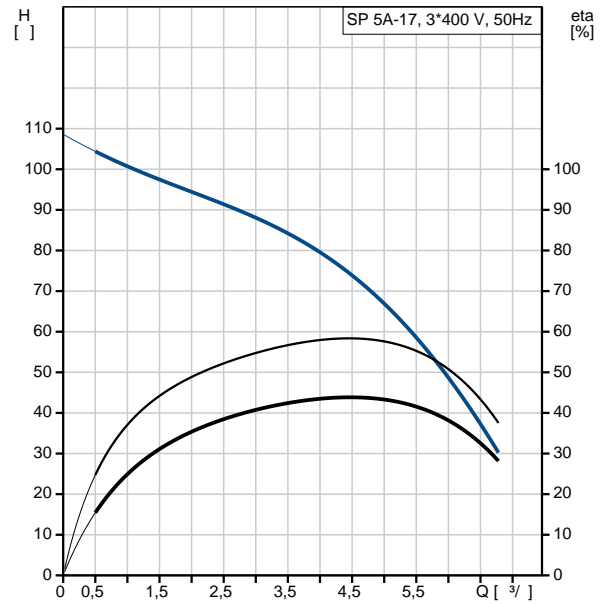


MEI :		0.50
ErP :	EuP	/ .
:		16.5
:		17.9
:		16.3 <sup>3</sup>
Danish VVS No.:		388315170
Swedish RSK No.:		5852972
Finnish LVI No.:		4762676
Norwegian NRF no.:		9040875
C :	DK	
:		8413702900

**05001K17 SP 5A-17 50**

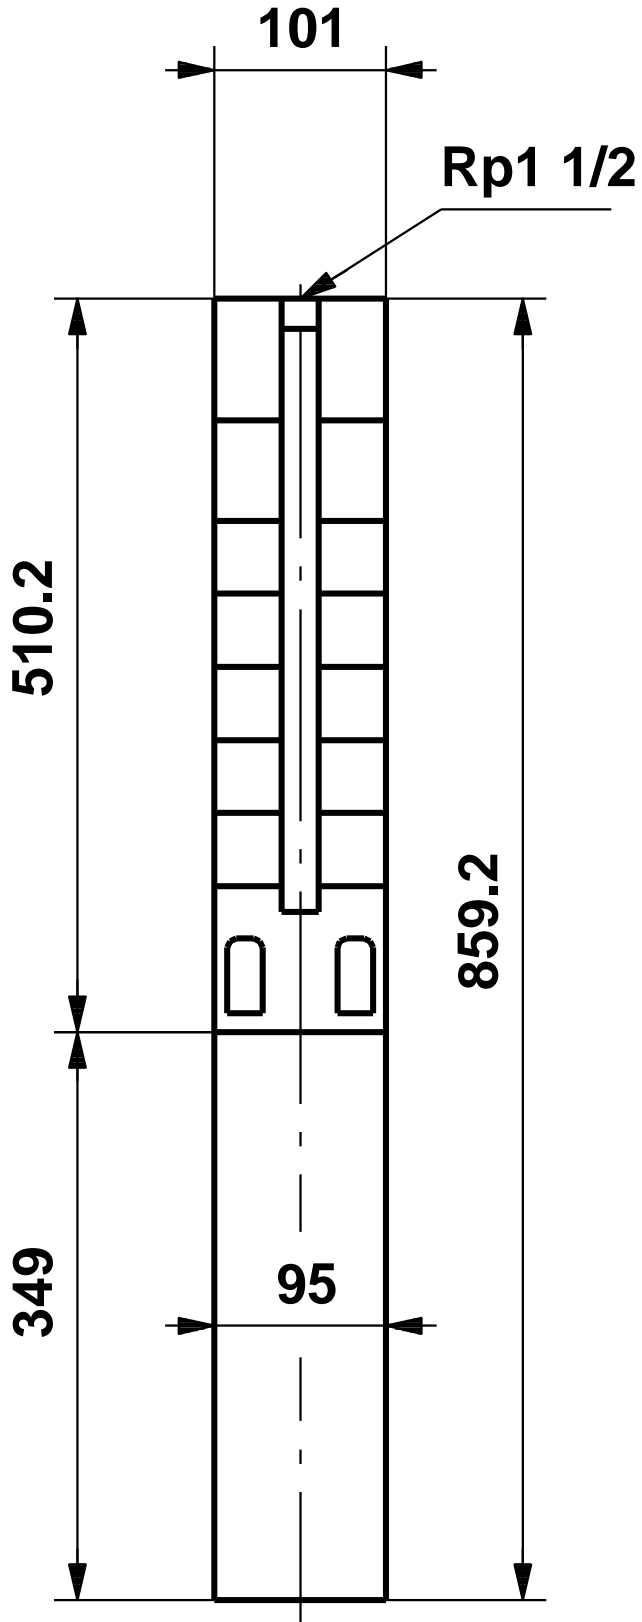

05001K17 SP 5A-17 50

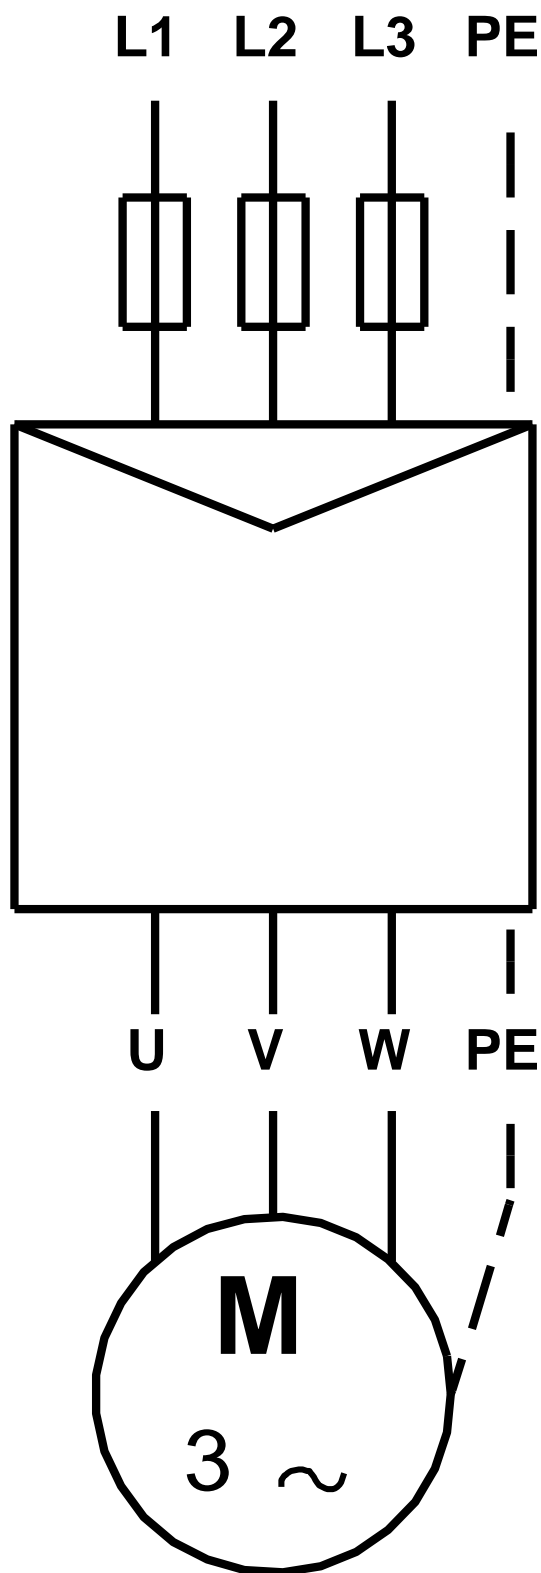

! [ ], .