


1 SP 5A-33



: 05001K33

, EN 1.4301 (AISI 304),

MS40003

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
 : 135
 : HM/CER
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 3
 (2), : 3
 : 50 Hz
 : 3 x 380-400-415
 : 7.70-7.85-8.10 A
 : 460-490-500 %
 Cos - : 0.82-0.77-0.73
 : 2850-2865-2875 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79194508
 :
 MEI : 0.50
 ErP : EuP /
 : 29.8
 : 31.6
 : 21.7 ³
 Danish VVS No.: 388315330
 Swedish RSK No.: 5852975
 Finnish LVI No.: 4762679
 Norwegian NRF no.: 9040878
 C : DK
 : 8413702900

05001K33 SP 5A-33 50

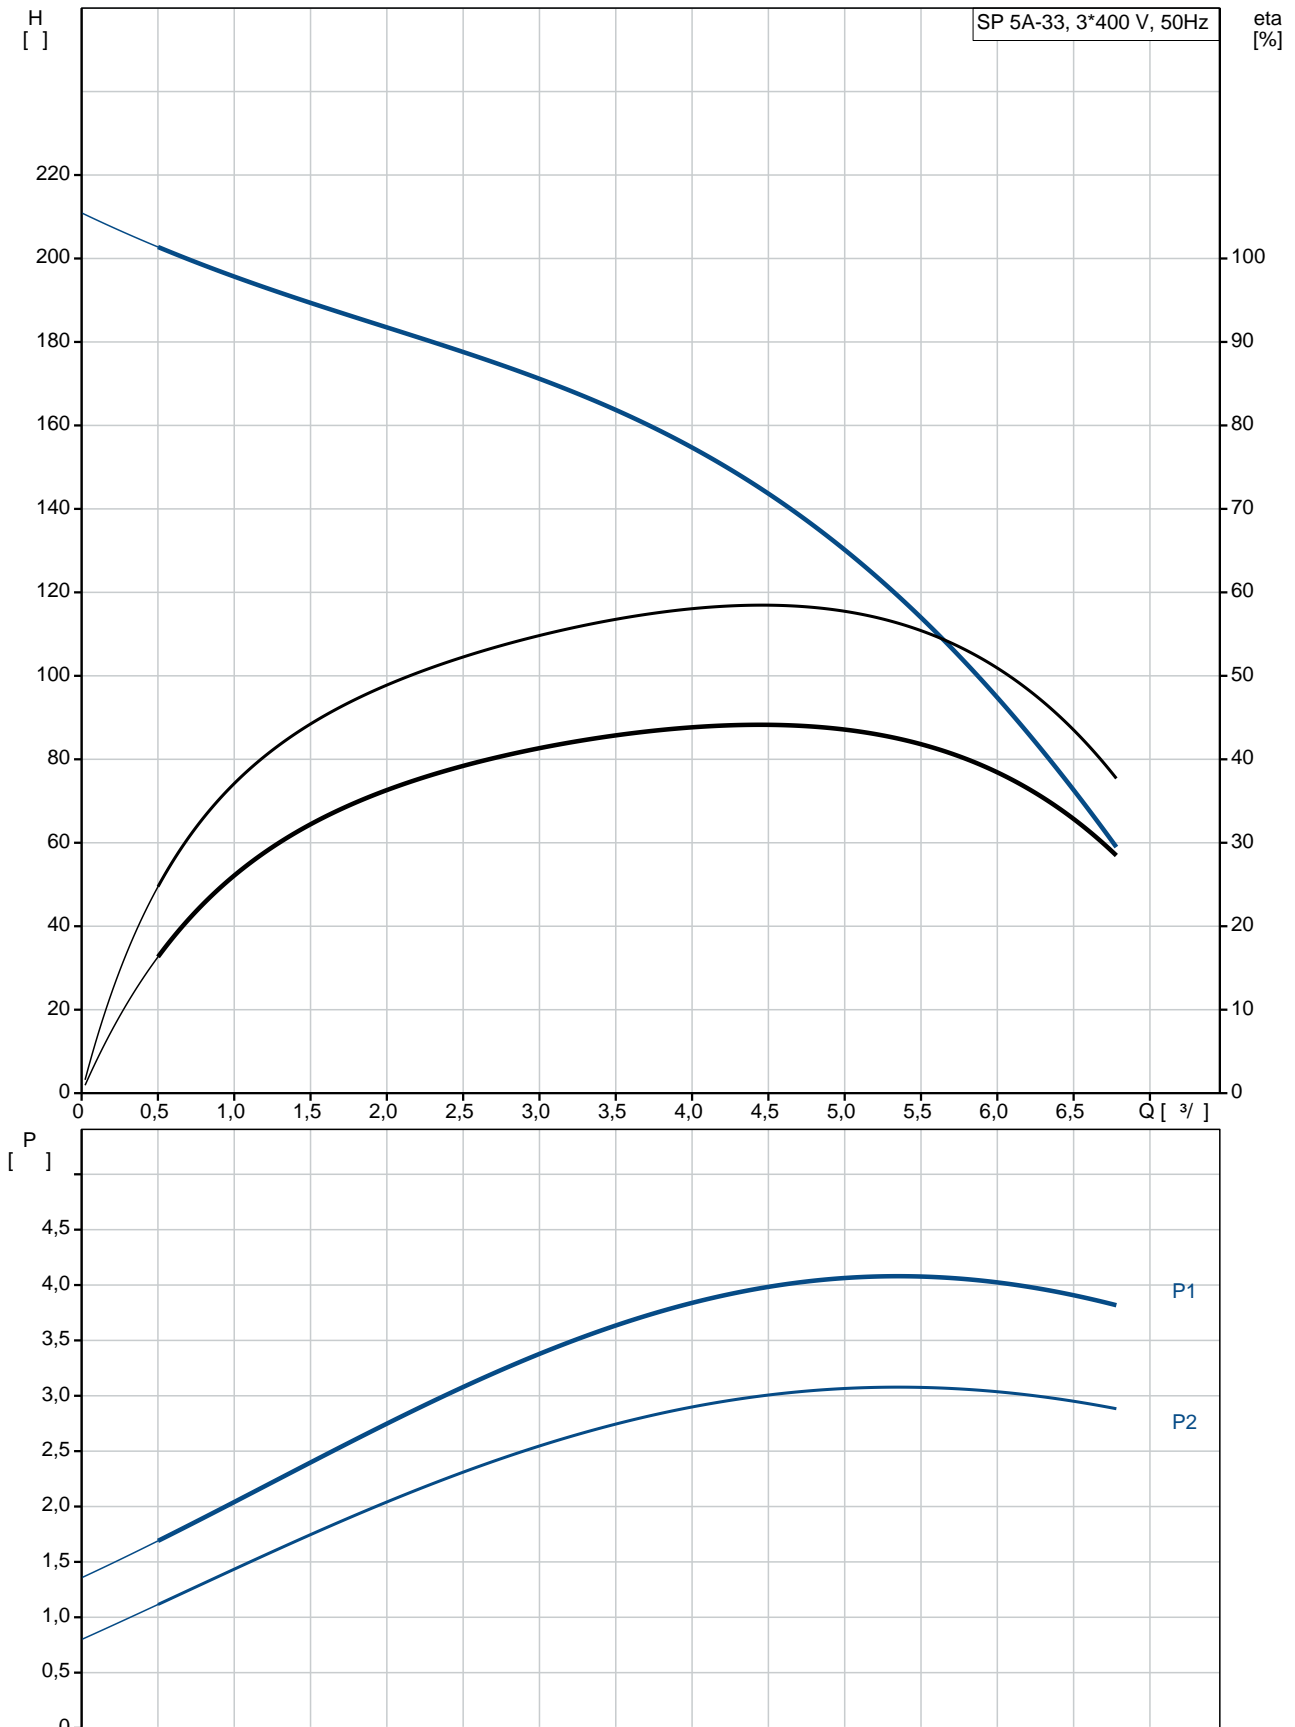

SP 5A-33
 05001K33
 EAN : 5708601059339
 2900 /
 5 3/
 135
 33
 NONE
 HM/CER
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/2
 4 inch

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS4000
 GRUNDFOS

- P2: 3

(2), 3

50 Hz
 3 x 380-400-415

7.70-7.85-8.10 A

460-490-500 %





Cos - : 0.82-0.77-0.73

2850-2865-2875 /

(IEC 34-5): IP68


(IEC 85): F

79194508

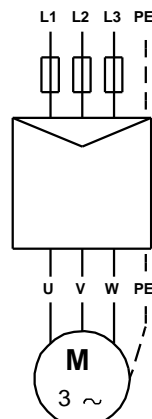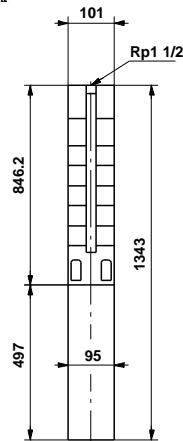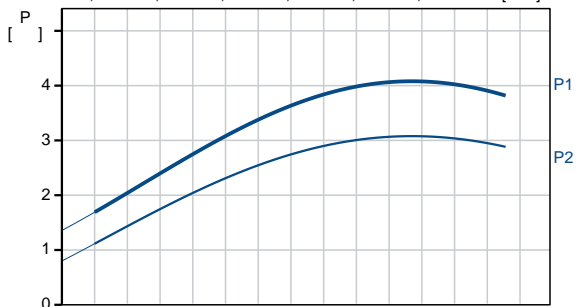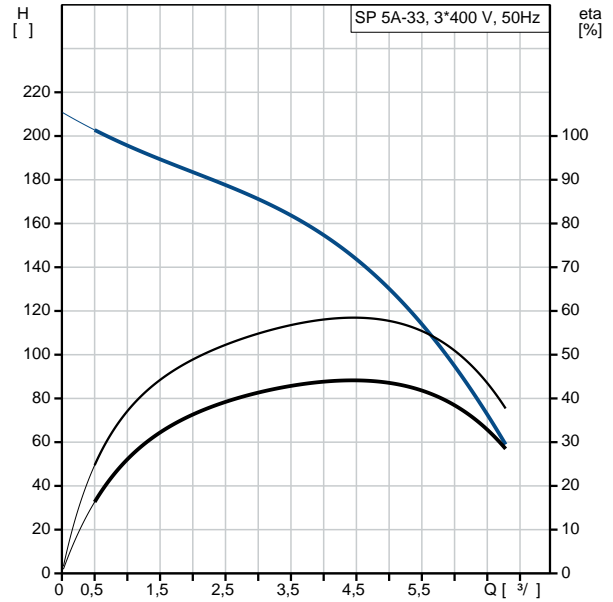


MEI :		0.50
ErP :	EuP	/ .
:		29.8
:		31.6
:		21.7 ³
Danish VVS No.:		388315330
Swedish RSK No.:		5852975
Finnish LVI No.:		4762679
Norwegian NRF no.:		9040878
C :	DK	
:		8413702900

05001K33 SP 5A-33 50

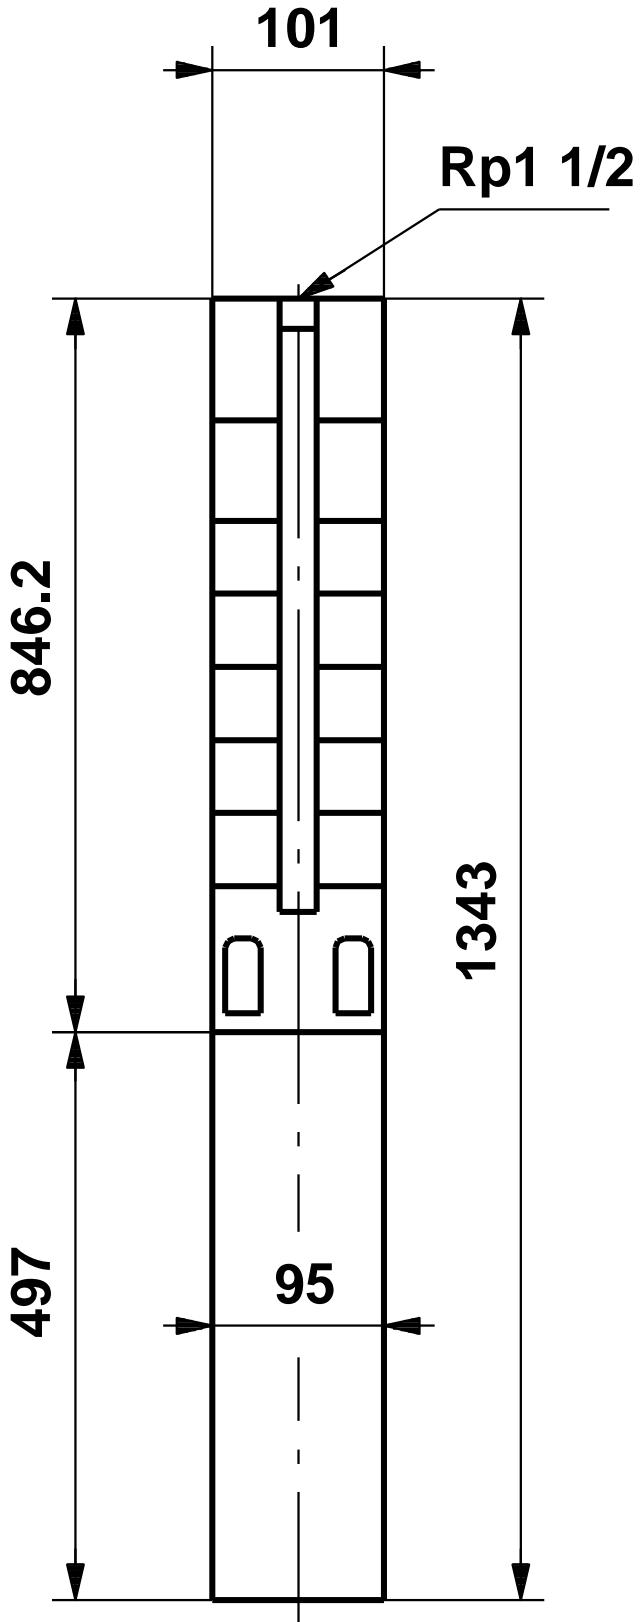

05001K33 SP 5A-33 50

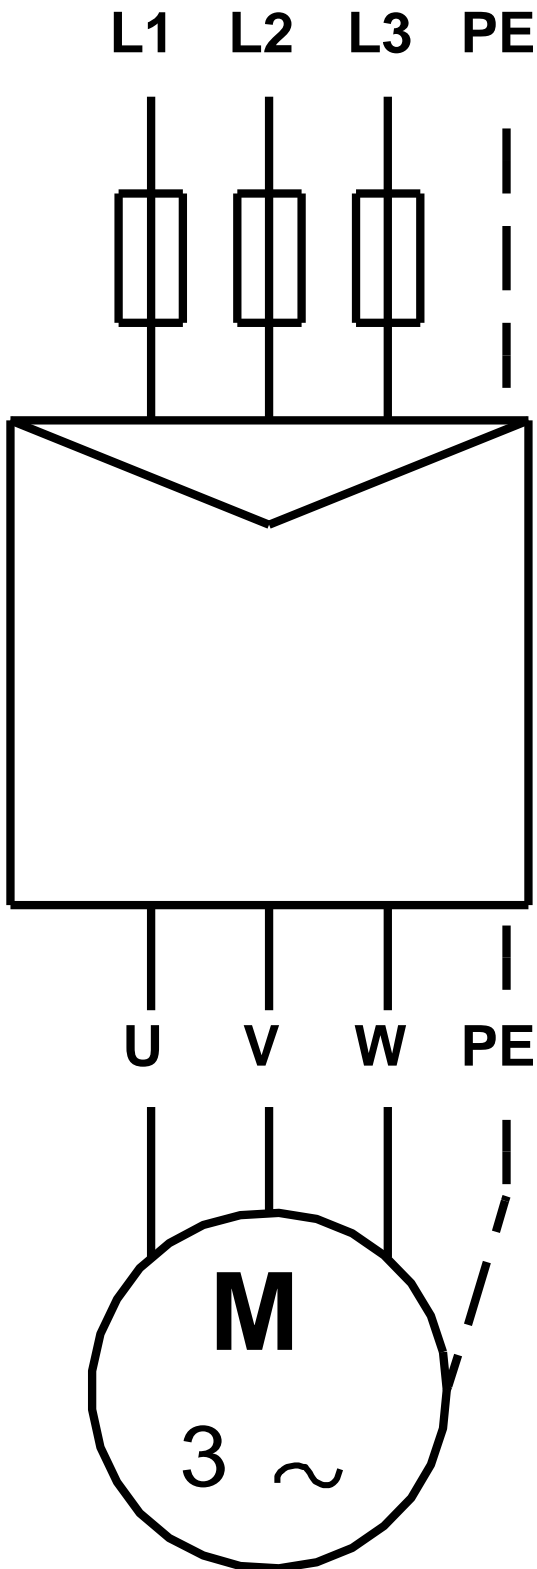

!

[],