

1 SP 5A-8



: 05002B08

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

: 5 ³/
33

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE


EN 1.4301
AISI AISI 304

EN 1.4301
AISI AISI 304





DIN W.-Nr. 1.4301
AISI 304

: Rp1 1/2
 : 4 inch
 :
 : MS402
 CSIR
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 1 x 230
 : 7.45 A
 : 390 %
 Cos - : 0.79
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213104
 :
 : MEI : 0.50
 ErP : EuP /
 : 12.5
 : 14.3
 : 16.3 ³
 C : DK
 : 8413702900

05002B08 SP 5A-8 50

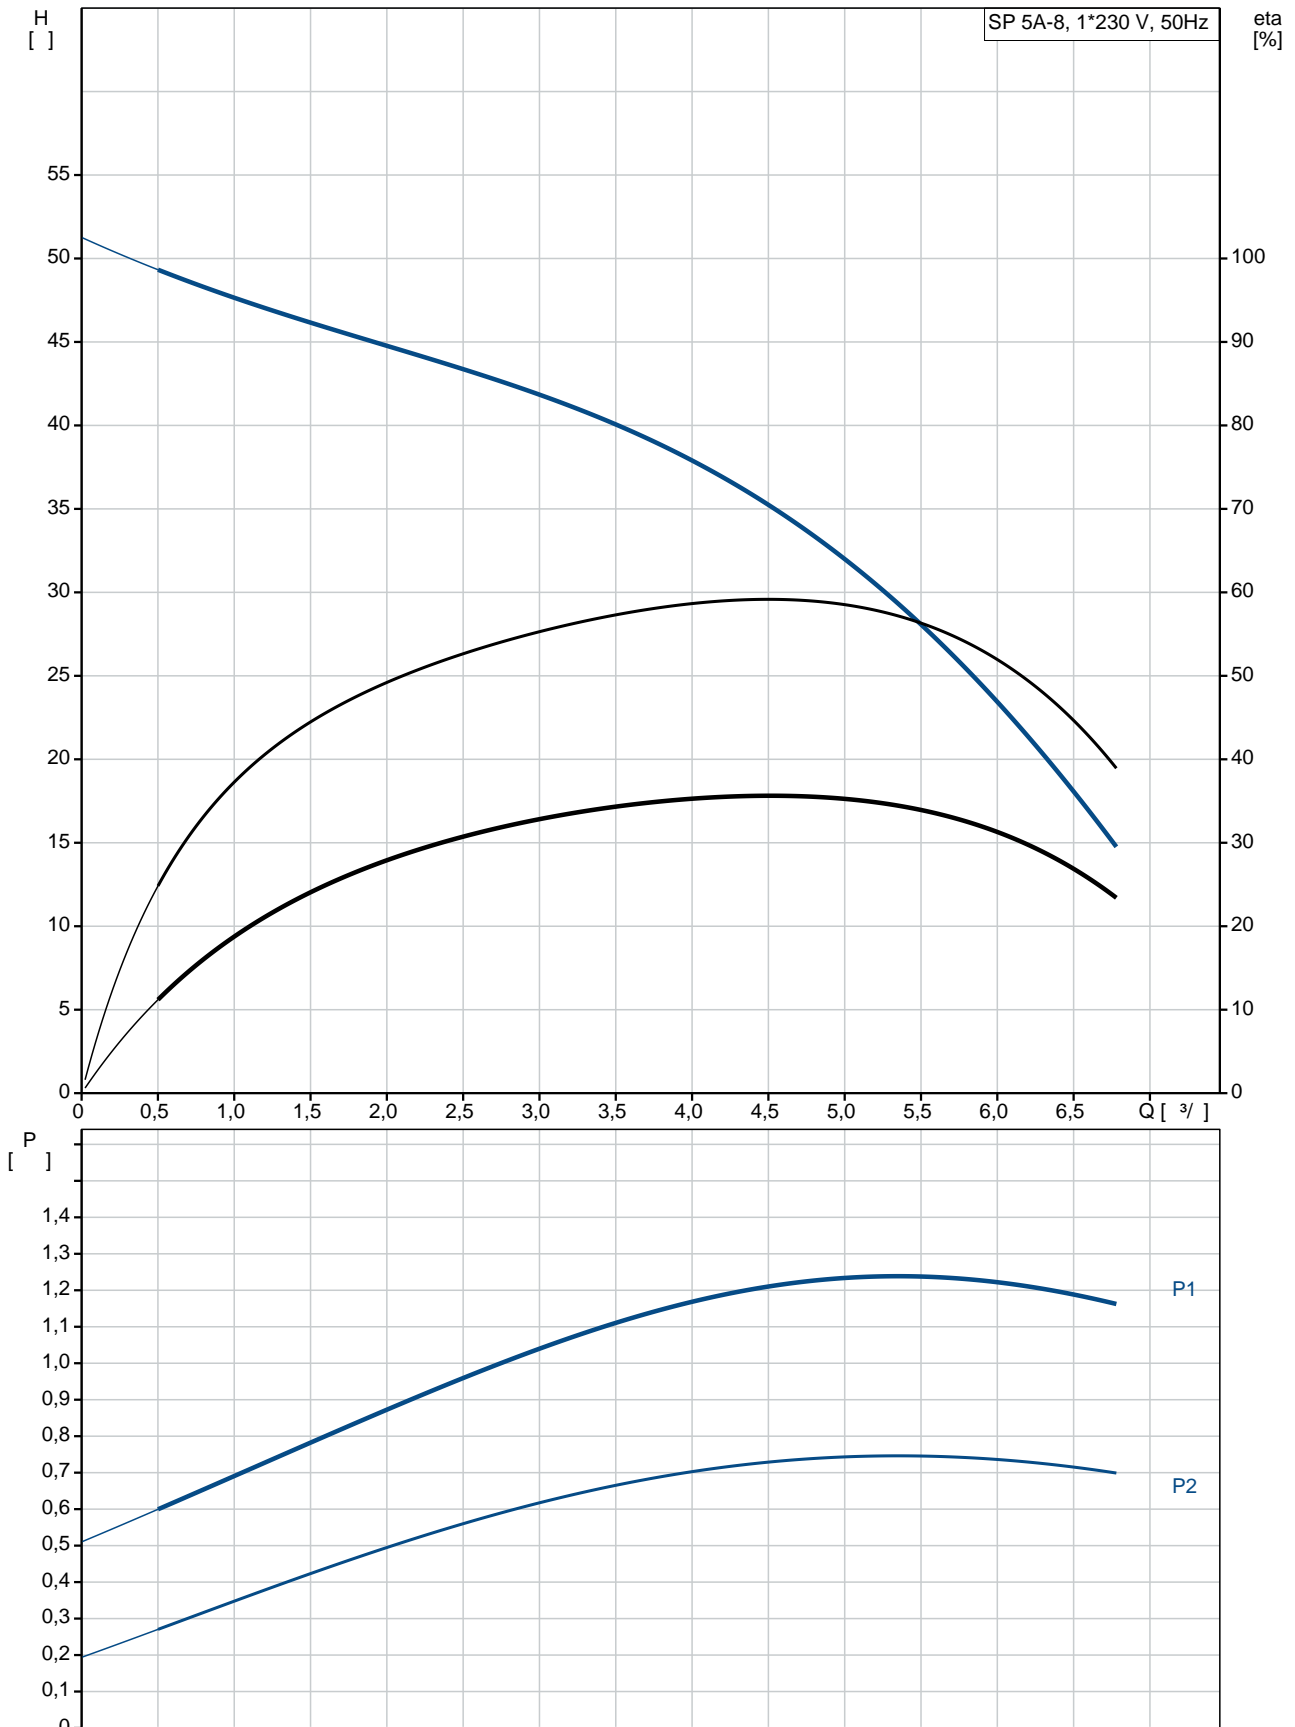


	SP 5A-8
	05002B08
EAN	5700391118654
	2900 /
	5 ^{3/}
	33
	8
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	CSIR
	GRUNDFOS
- P2:	0.75
(2),	0.75
	50 Hz
	1 x 230
	7.45 A
	390 %
Cos	0.79
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	CONTACT
	79213104

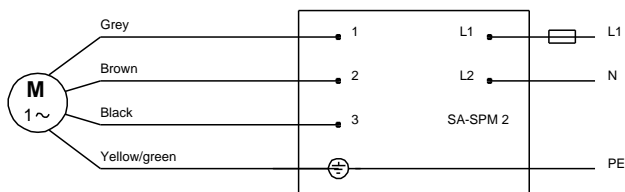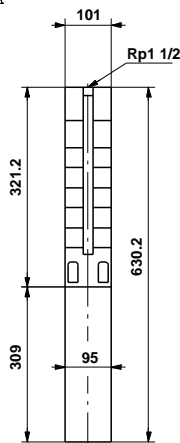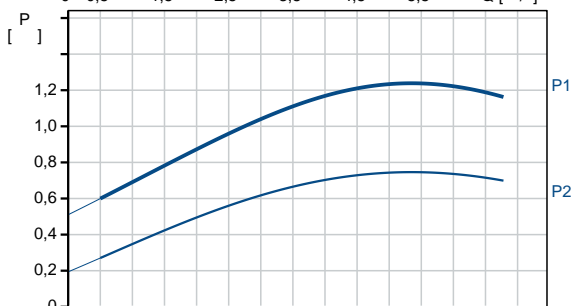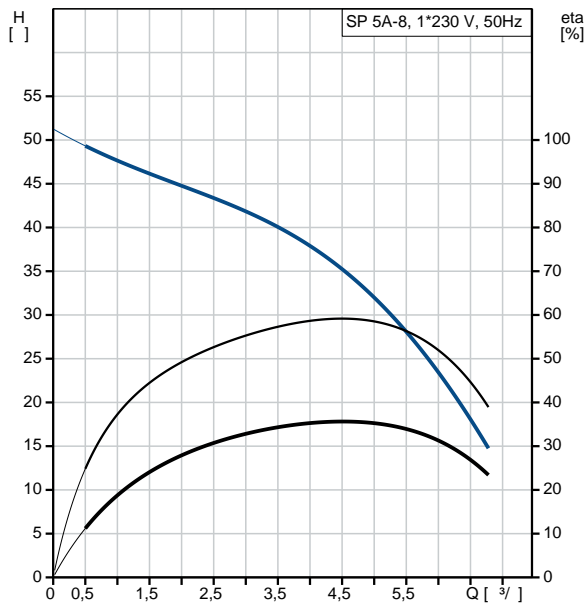

:	
MEI :	0.50
ErP :	EuP / .
:	12.5
:	14.3
:	16.3 ³
C :	DK
:	8413702900

05002B08 SP 5A-8 50

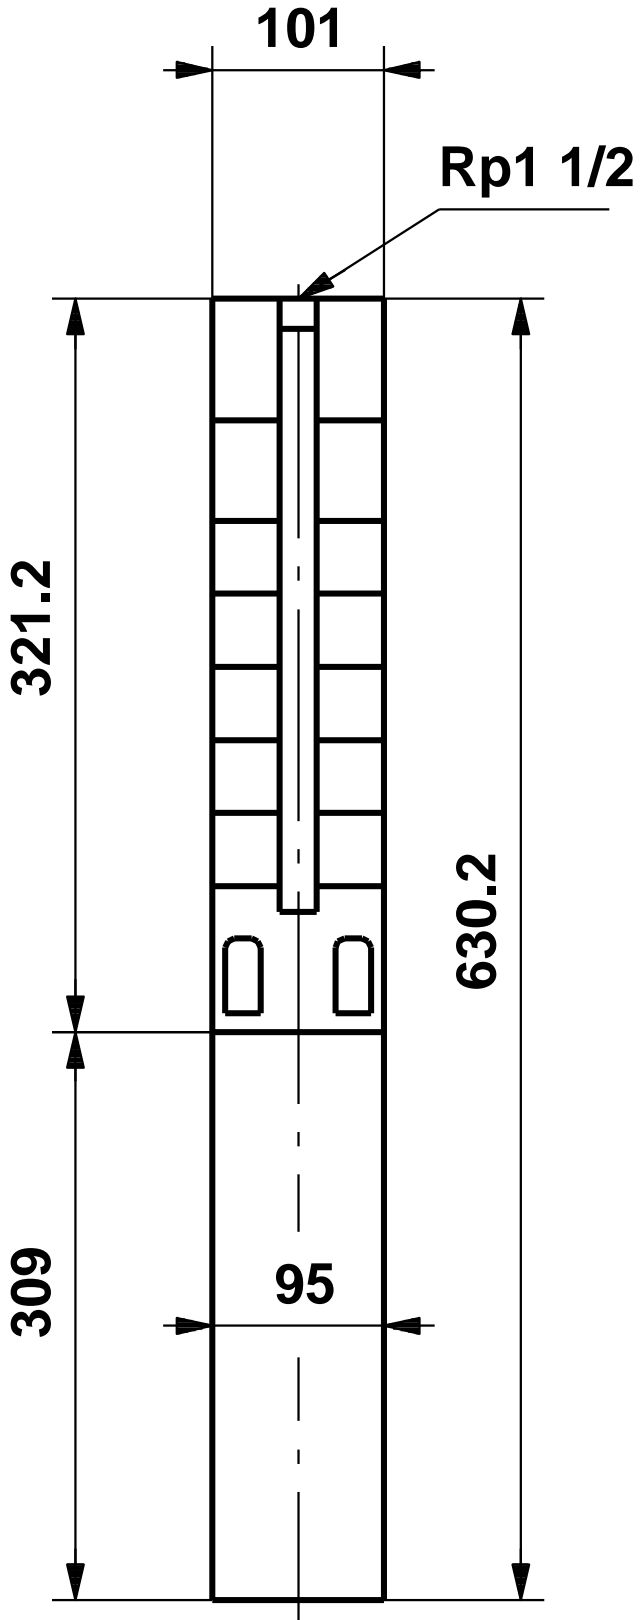

05002B08 SP 5A-8 50

