

1 SP 5A-25



: 05051K25

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

5 ³/

102

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE

EN 1.4301

AISI AISI 304

EN 1.4301


AISI AISI 304

DIN W.-Nr. 1.4301





AISI 304

:
 : Rp1 1/2
 : 4 inch
 :
 : MS402
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.50-5.50-5.70 A
 : 440-460-470 %
 Cos - : 0.85-0.82-0.77
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192007
 :
 ErP : MEI : 0.50
 : EuP / .
 : 19.6
 : 21.3
 : 21.7 ³
 C : DK
 : 8413702900

05051K25 SP 5A-25 50

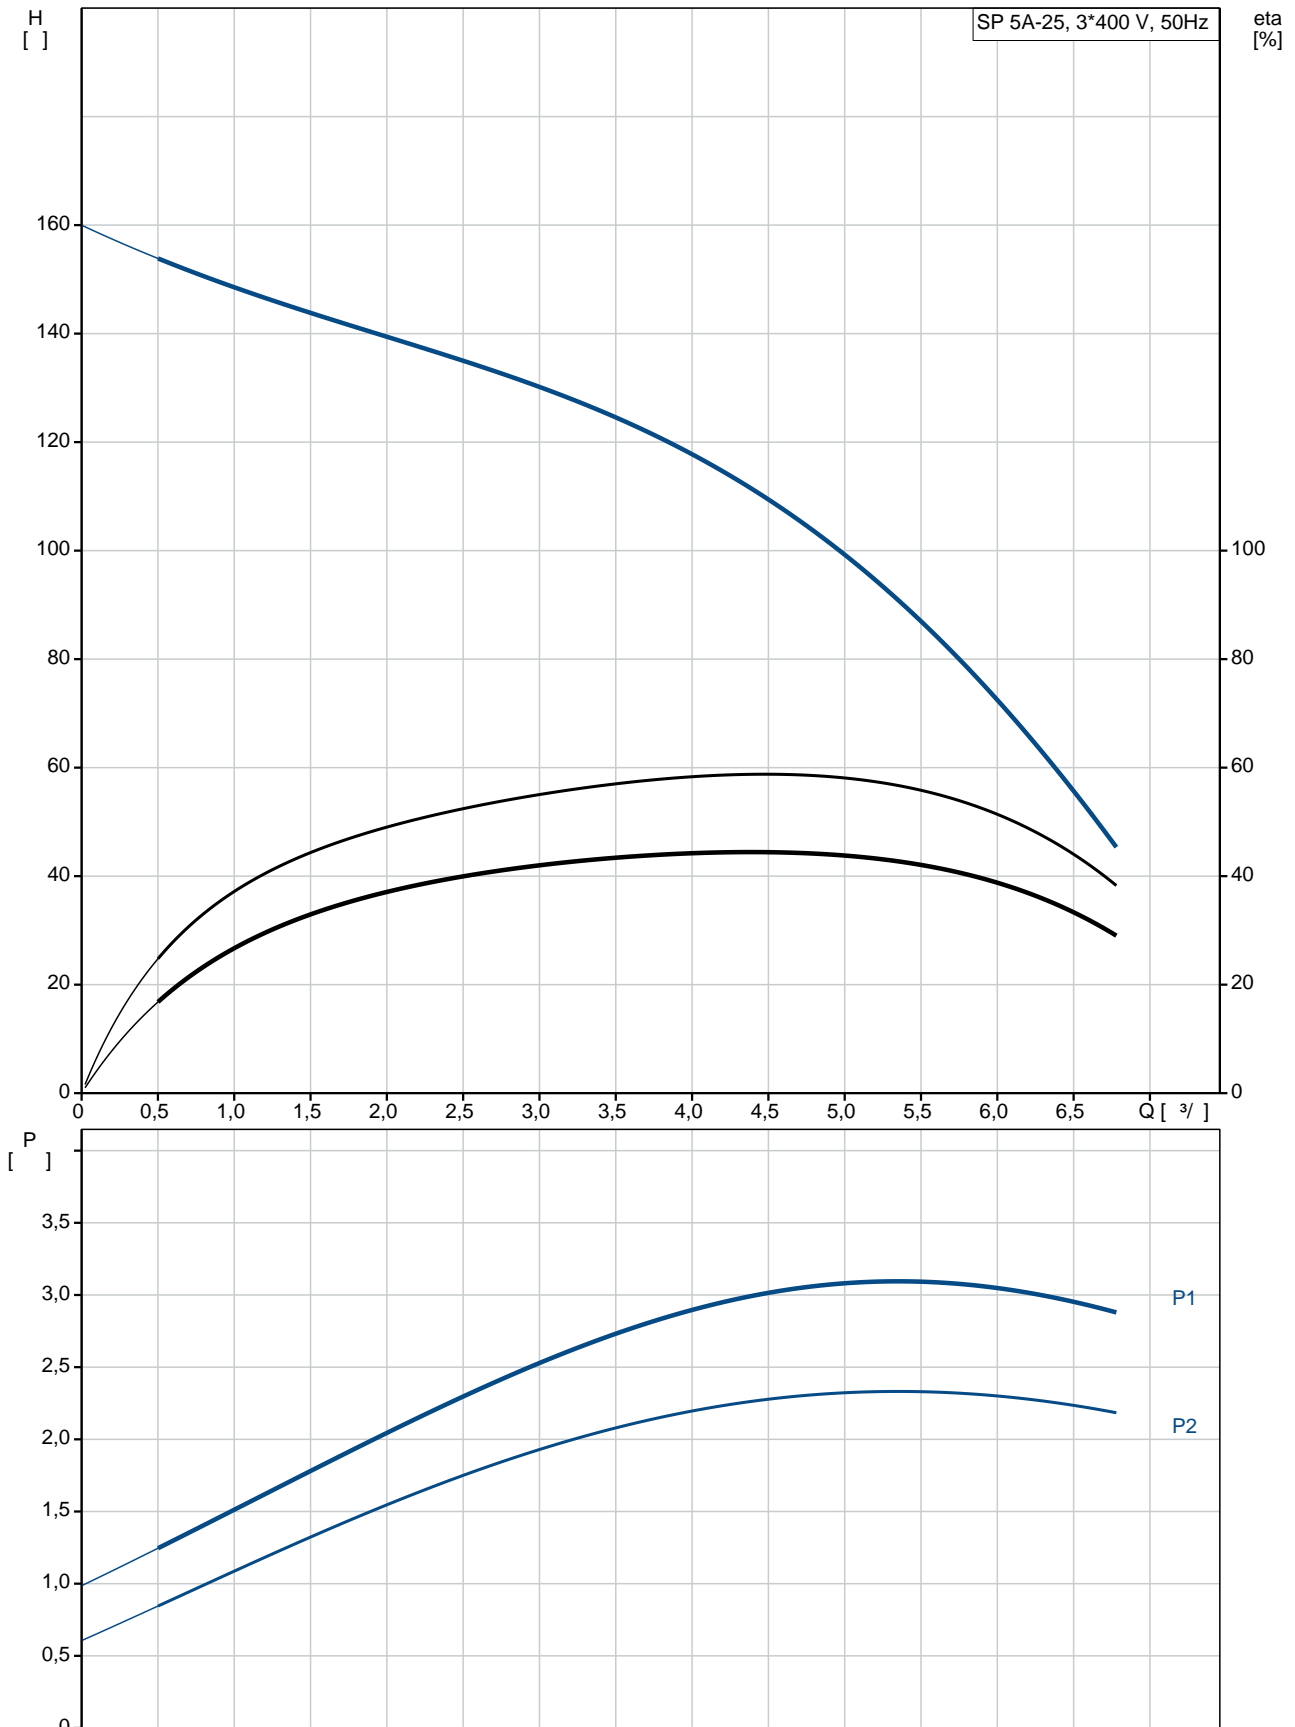


	SP 5A-25
	05051K25
EAN	5700391251184
	2900 /
	5 ^{3/}
	102
	25
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	NO
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	GRUNDFOS
- P2:	2.2
(2),	2.2
	50 Hz
	3 x 380-400-415
	5.50-5.50-5.70 A
	440-460-470 %
Cos	0.85-0.82-0.77
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192007

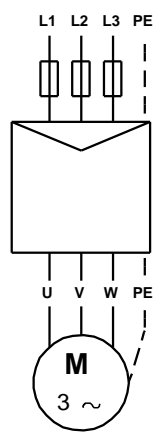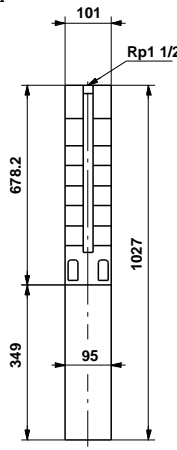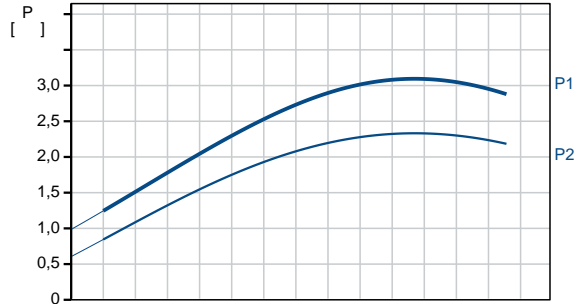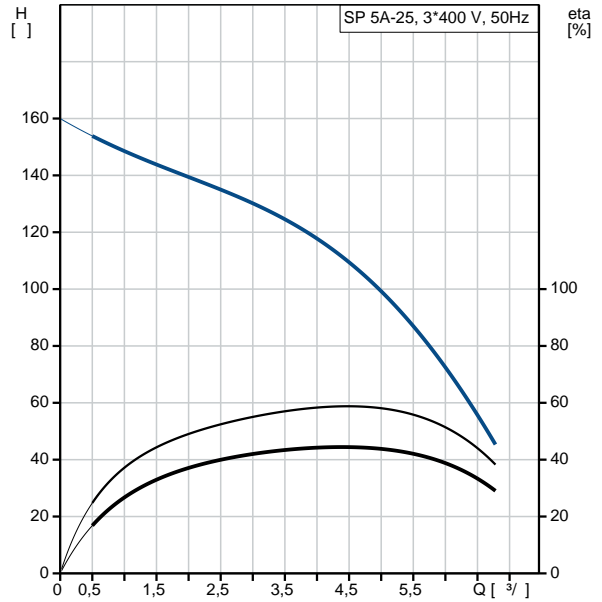


MEI :		0.50
ErP :	EuP	/ .
:		19.6
:		21.3
:		21.7 ³
C :	DK	
:		8413702900

05051K25 SP 5A-25 50

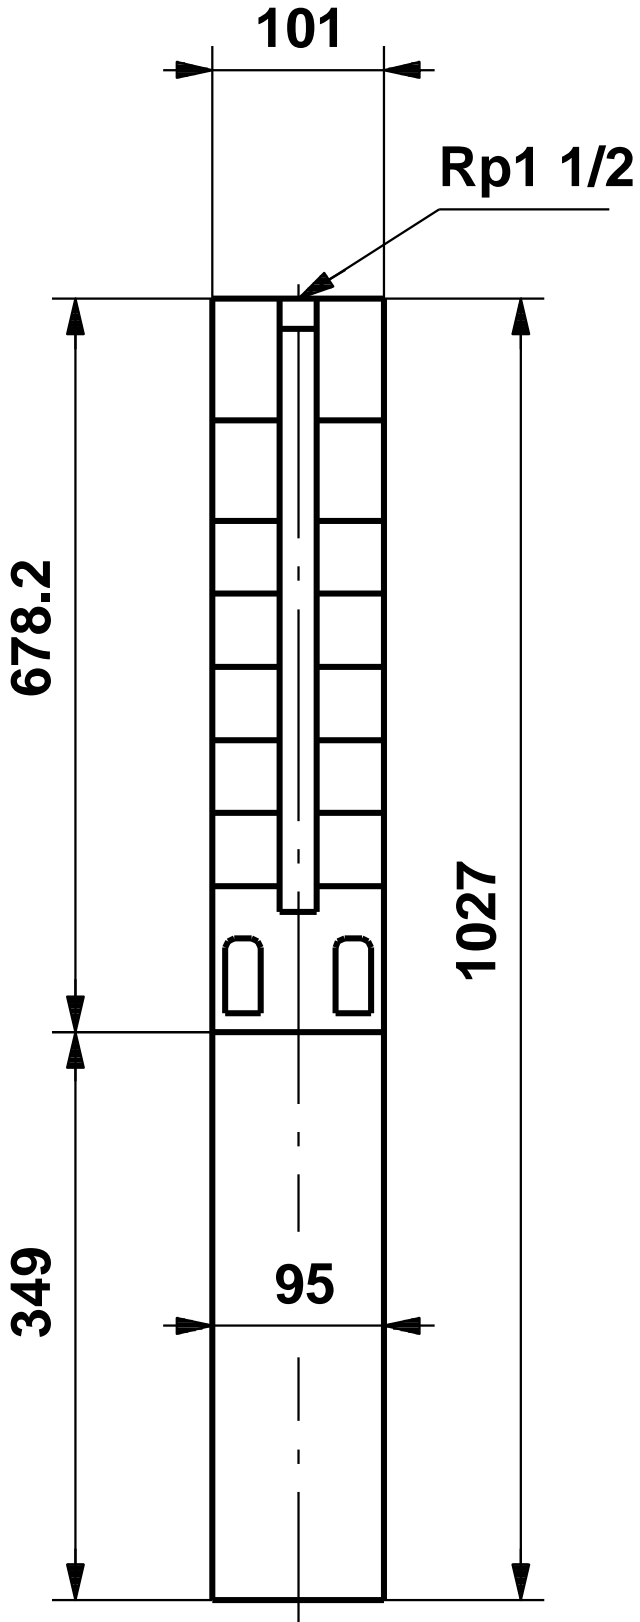

05051K25 SP 5A-25 50

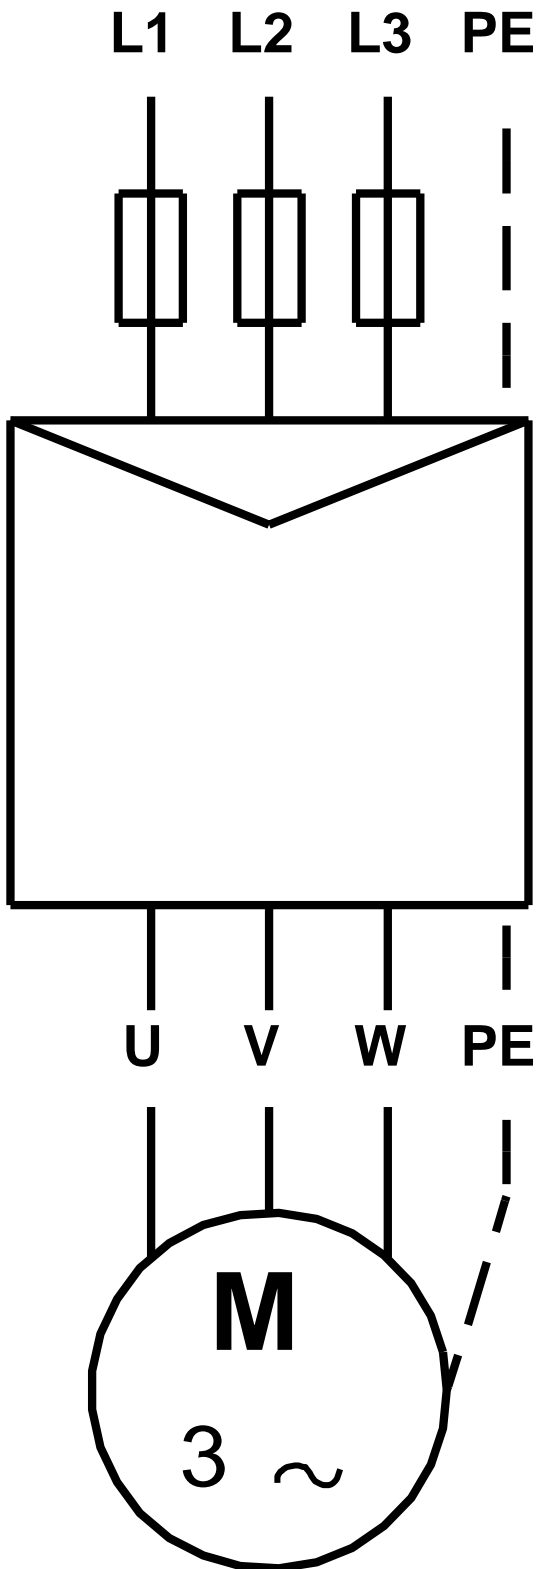

!

[],