

1 SP 5A-33



: 05051K33

, EN 1.4301 (AISI 304),

MS40003

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
 : 135
 : HM/CER
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE



EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 3
 (2), : 3
 : 50 Hz
 : 3 x 380-400-415
 : 7.70-7.85-8.10 A
 : 460-490-500 %
 Cos - : 0.82-0.77-0.73
 : 2850-2865-2875 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79194508
 :
 ErP : MEI : 0.50
 : EuP /
 : 26
 : 27.8
 : 21.7 ³

05051K33 SP 5A-33 50

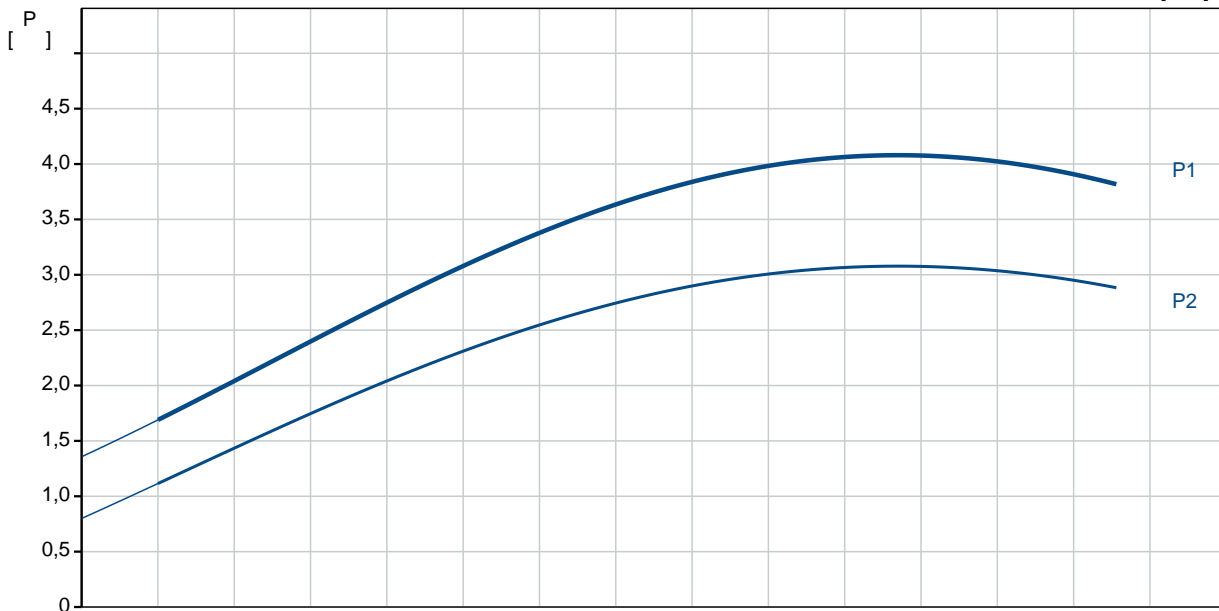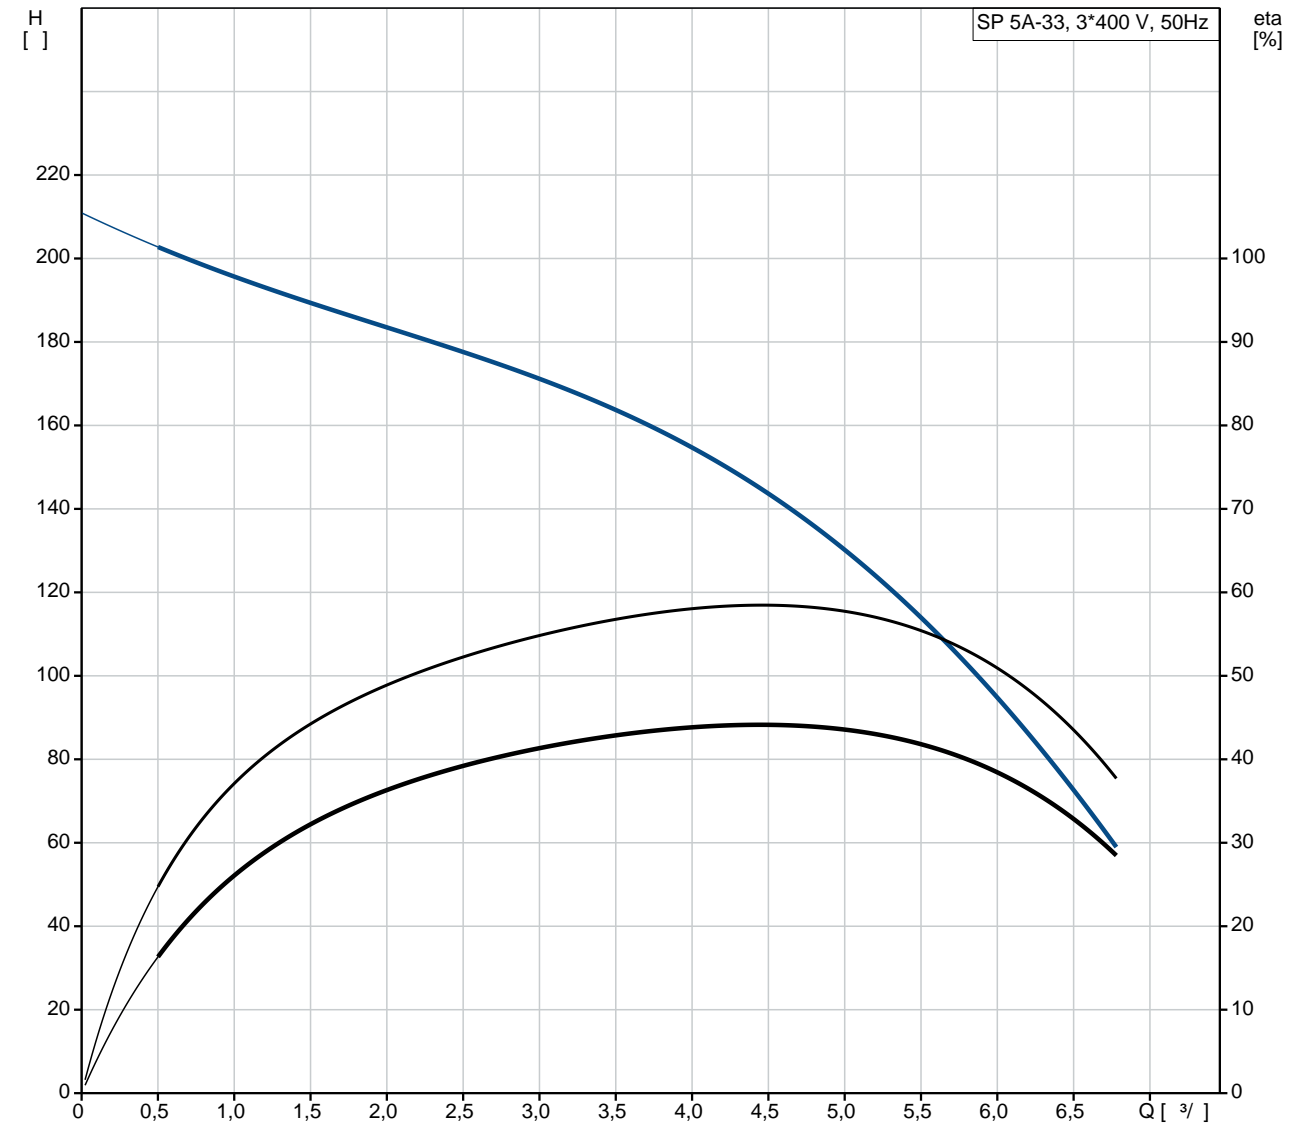


	SP 5A-33
	05051K33
EAN	5700391251221
	2900 /
	5 3/
	135
	33
	NONE
	HM/CER
	CE,EAC
	ISO9906:2012 3B
	A
	NO
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS4000
	GRUNDFOS
- P2:	3
(2),	3
	50 Hz
	3 x 380-400-415
	7.70-7.85-8.10 A
	460-490-500 %
Cos	0.82-0.77-0.73
	2850-2865-2875 /
(IEC 34-5):	IP68
(IEC 85):	F
	79194508

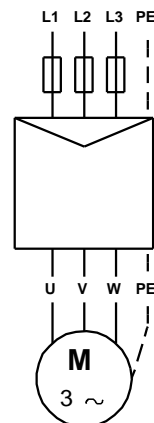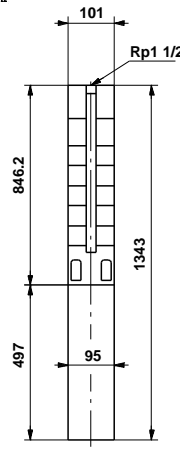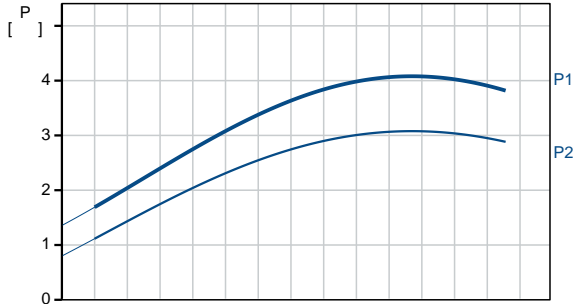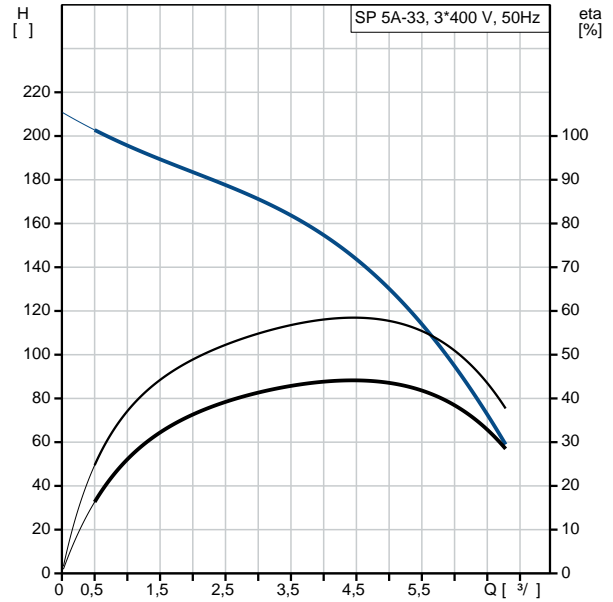

MEI :		0.50
ErP :	EuP	/ .
:		26
:		27.8
:		21.7 ³

05051K33 SP 5A-33 50

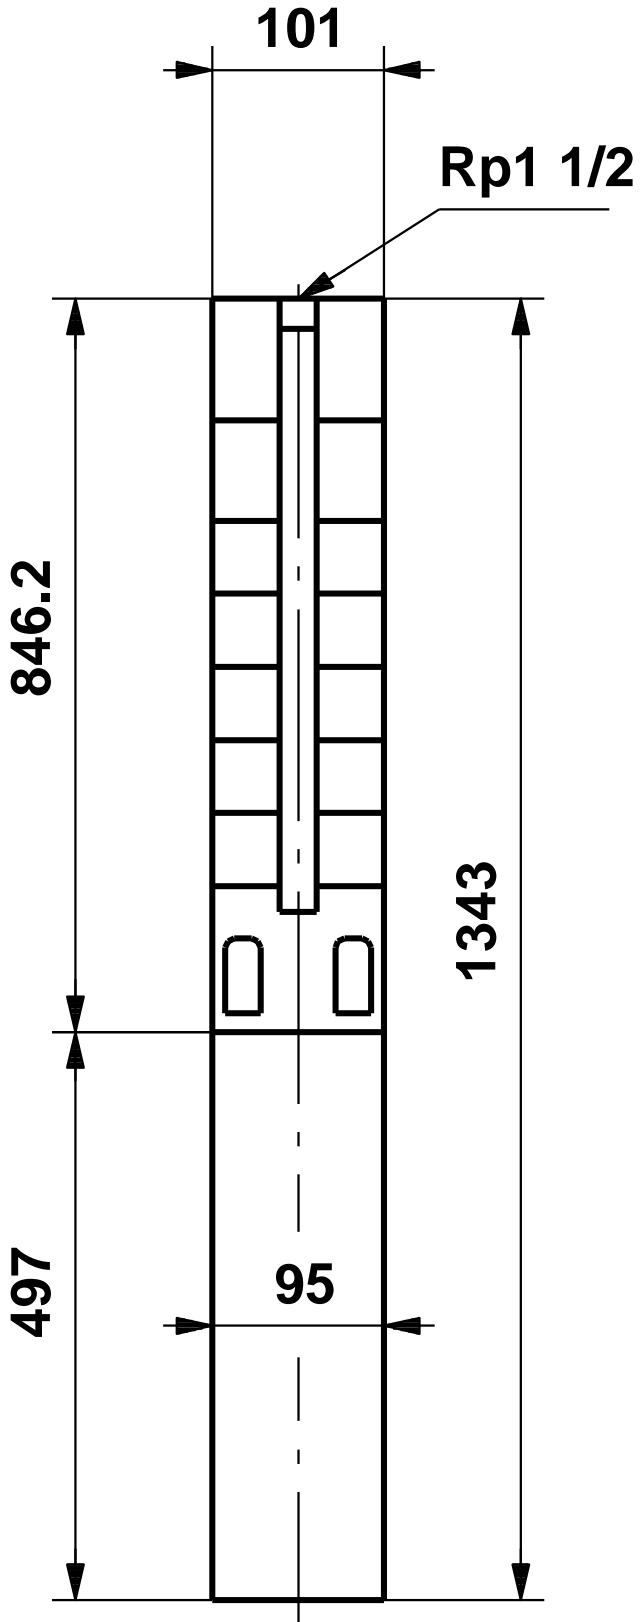

05051K33 SP 5A-33 50



!

[],