

1 SP 5A-38



: 05101K38

, EN 1.4301 (AISI 304),

MS40004

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
 : 155
 : HM/CER
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : CYLINDRICAL



EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 4
 (2), : 4
 : 50 Hz
 : 3 x 380-400-415
 : 9.75-9.60-9.80 A
 : 460-500-530 %
 Cos - : 0.85-0.80-0.77
 : 2850-2865-2875 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79194510
 :
 : MEI : 0.50
 ErP : EuP / .
 : 39.7
 : 45.4
 : 66.8 ³
 Danish VVS No.: 388315380
 Swedish RSK No.: 5852807
 Finnish LVI No.: 4762680
 Norwegian NRF no.: 9040879
 C : DK
 : 8413702900

05101K38 SP 5A-38 50

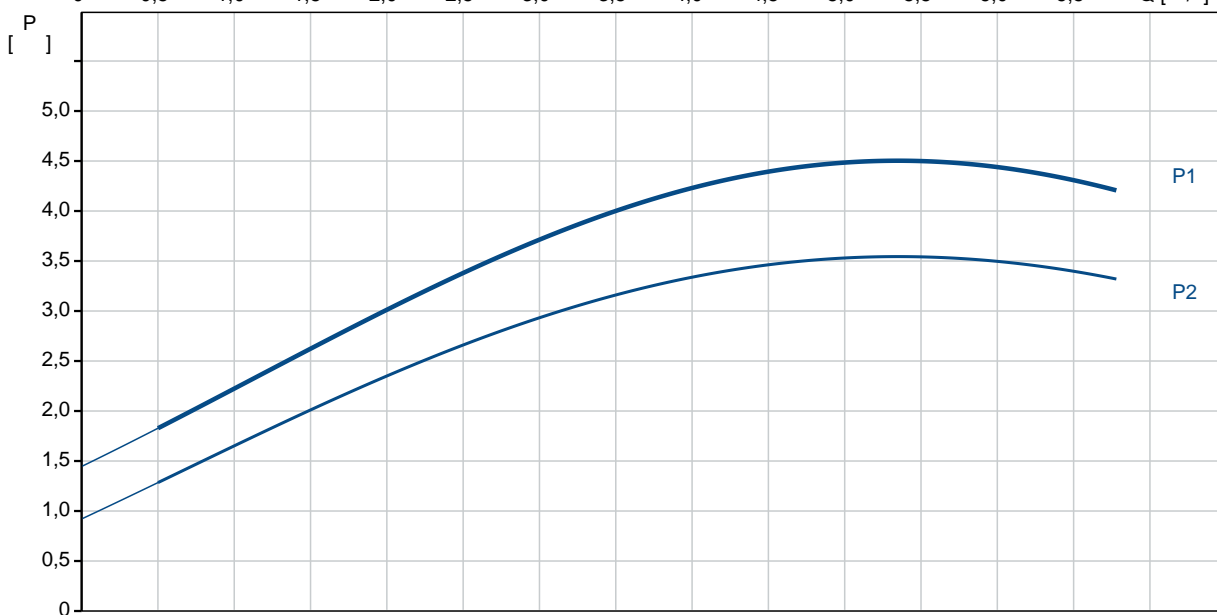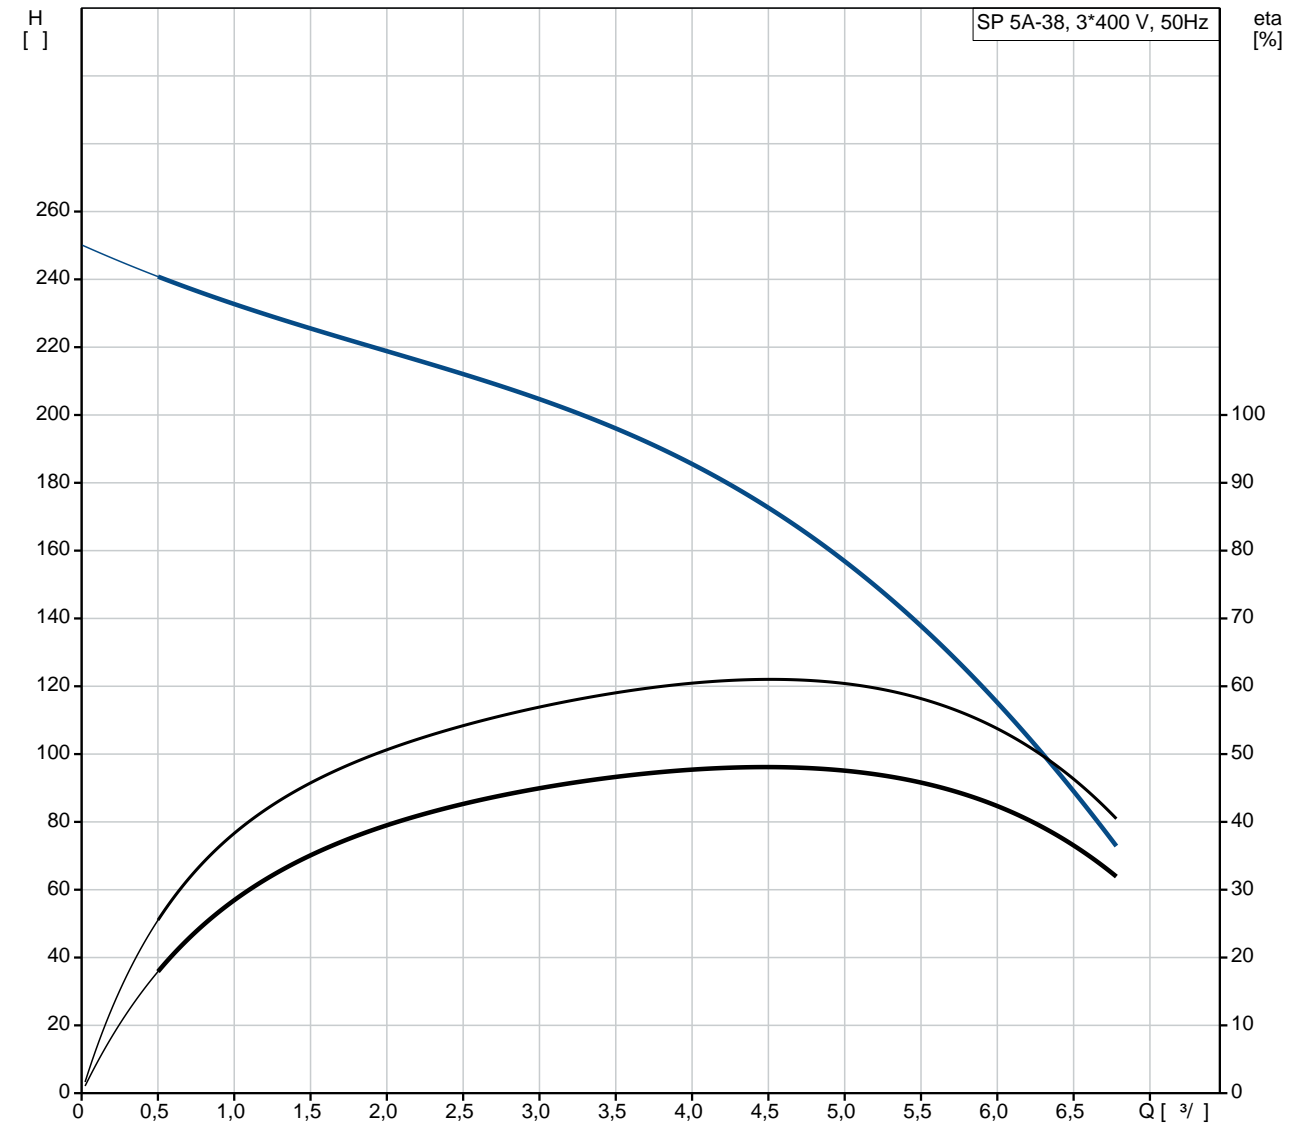

SP 5A-38
05101K38
 EAN : 5708601059346

2900 /
 5 3/
 155
 38
 NONE
 HM/CER
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 CYLINDRICAL

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/2
 4 inch

Maximum liquid temperature: 40 °C

t 0,15 / : 40 °C

: 20 °C

: 998.2 / 3

: MS4000

: GRUNDFOS

- P2: 4

(2), 4

: 50 Hz

: 3 x 380-400-415

: 9.75-9.60-9.80 A

: 460-500-530 %





Cos - : 0.85-0.80-0.77

: 2850-2865-2875 /

(IEC 34-5): IP68


(IEC 85): F

: 79194510

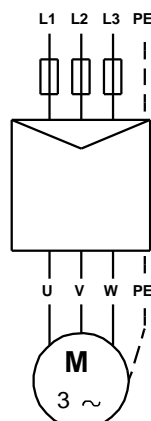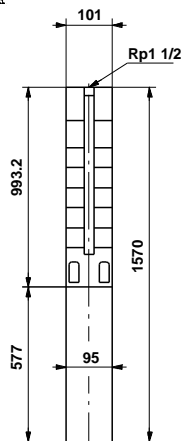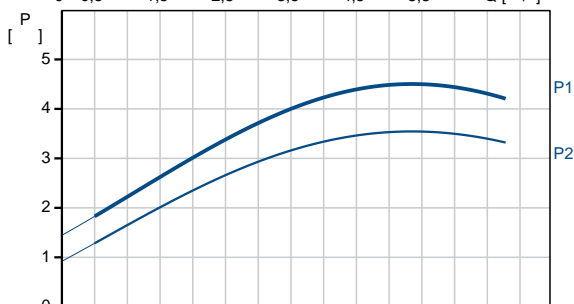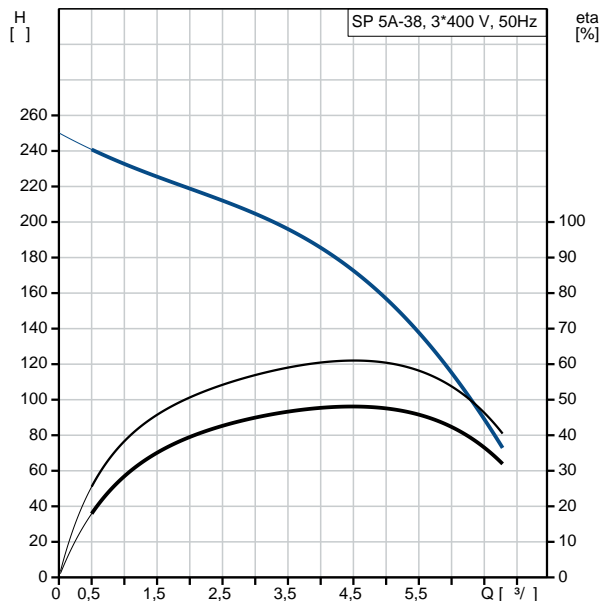

MEI :		0.50
ErP :	EuP	/ .
:		39.7
:		45.4
:		66.8 ³
Danish VVS No.:		388315380
Swedish RSK No.:		5852807
Finnish LVI No.:		4762680
Norwegian NRF no.:		9040879
C :	DK	
:		8413702900

05101K38 SP 5A-38 50

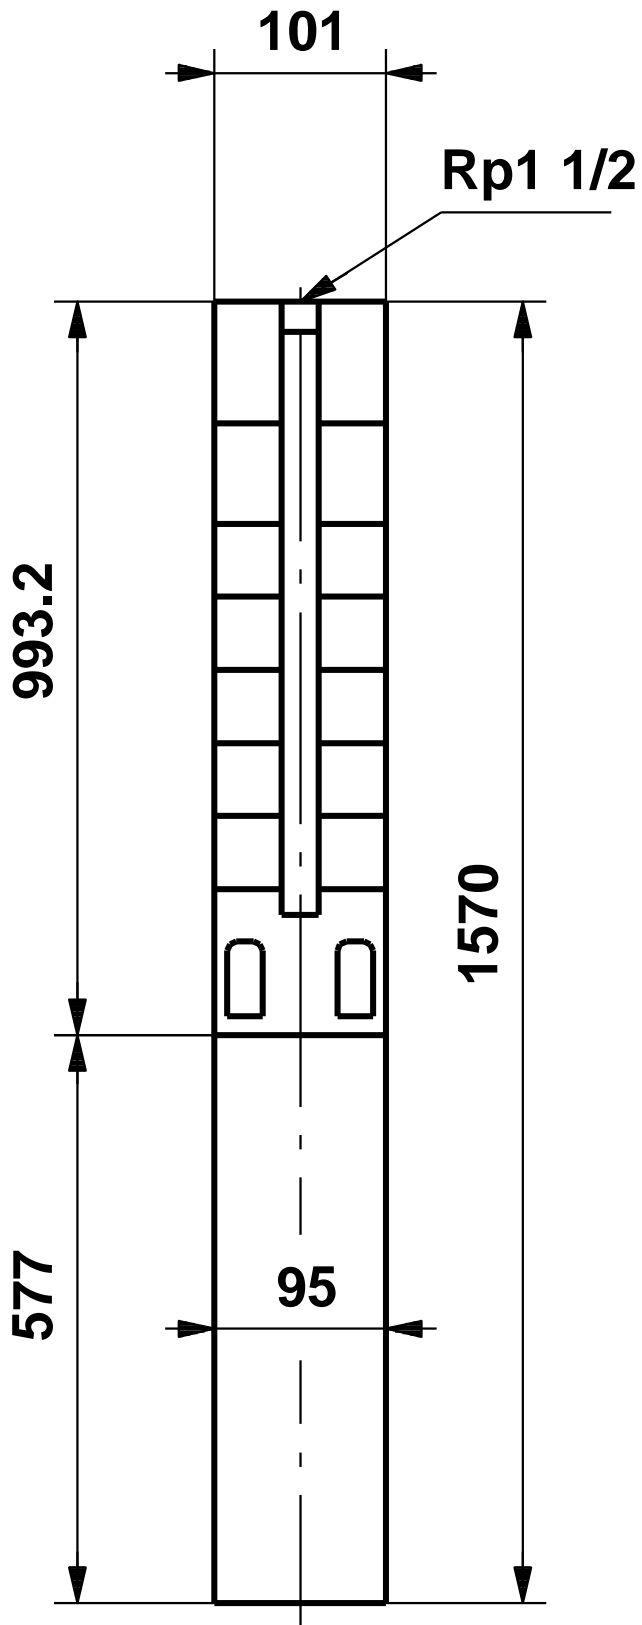

05101K38 SP 5A-38 50



! [], .