

1 SP 1A-18



: 08001K18

, EN 1.4301 (AISI 304),

MS4020.55

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 .t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 1 <sup>3</sup>/<sub>71</sub>  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304





DIN W.-Nr. 1.4301  
 AISI 304

:  
 : Rp1 1/4  
 : 4 inch  
 :  
 : MS402  
 - P2: 0.55  
 ( 2), : 0.55  
 : 50 Hz  
 : 3 x 380-400-415  
 : 2.00-2.20-2.35 A  
 : 470-480-470 %  
 Cos - : 0.70-0.64-0.60  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192003  
 :  
 MEI : 0.70  
 ErP : EuP /  
 : 13.4  
 : 13.3  
 : 16.3 <sup>3</sup>  
 Danish VVS No.: 388311180  
 Swedish RSK No.: 5850287  
 Norwegian NRF no.: 9040803  
 C : DK  
 : 8413702900

## 08001K18 SP 1A-18 50

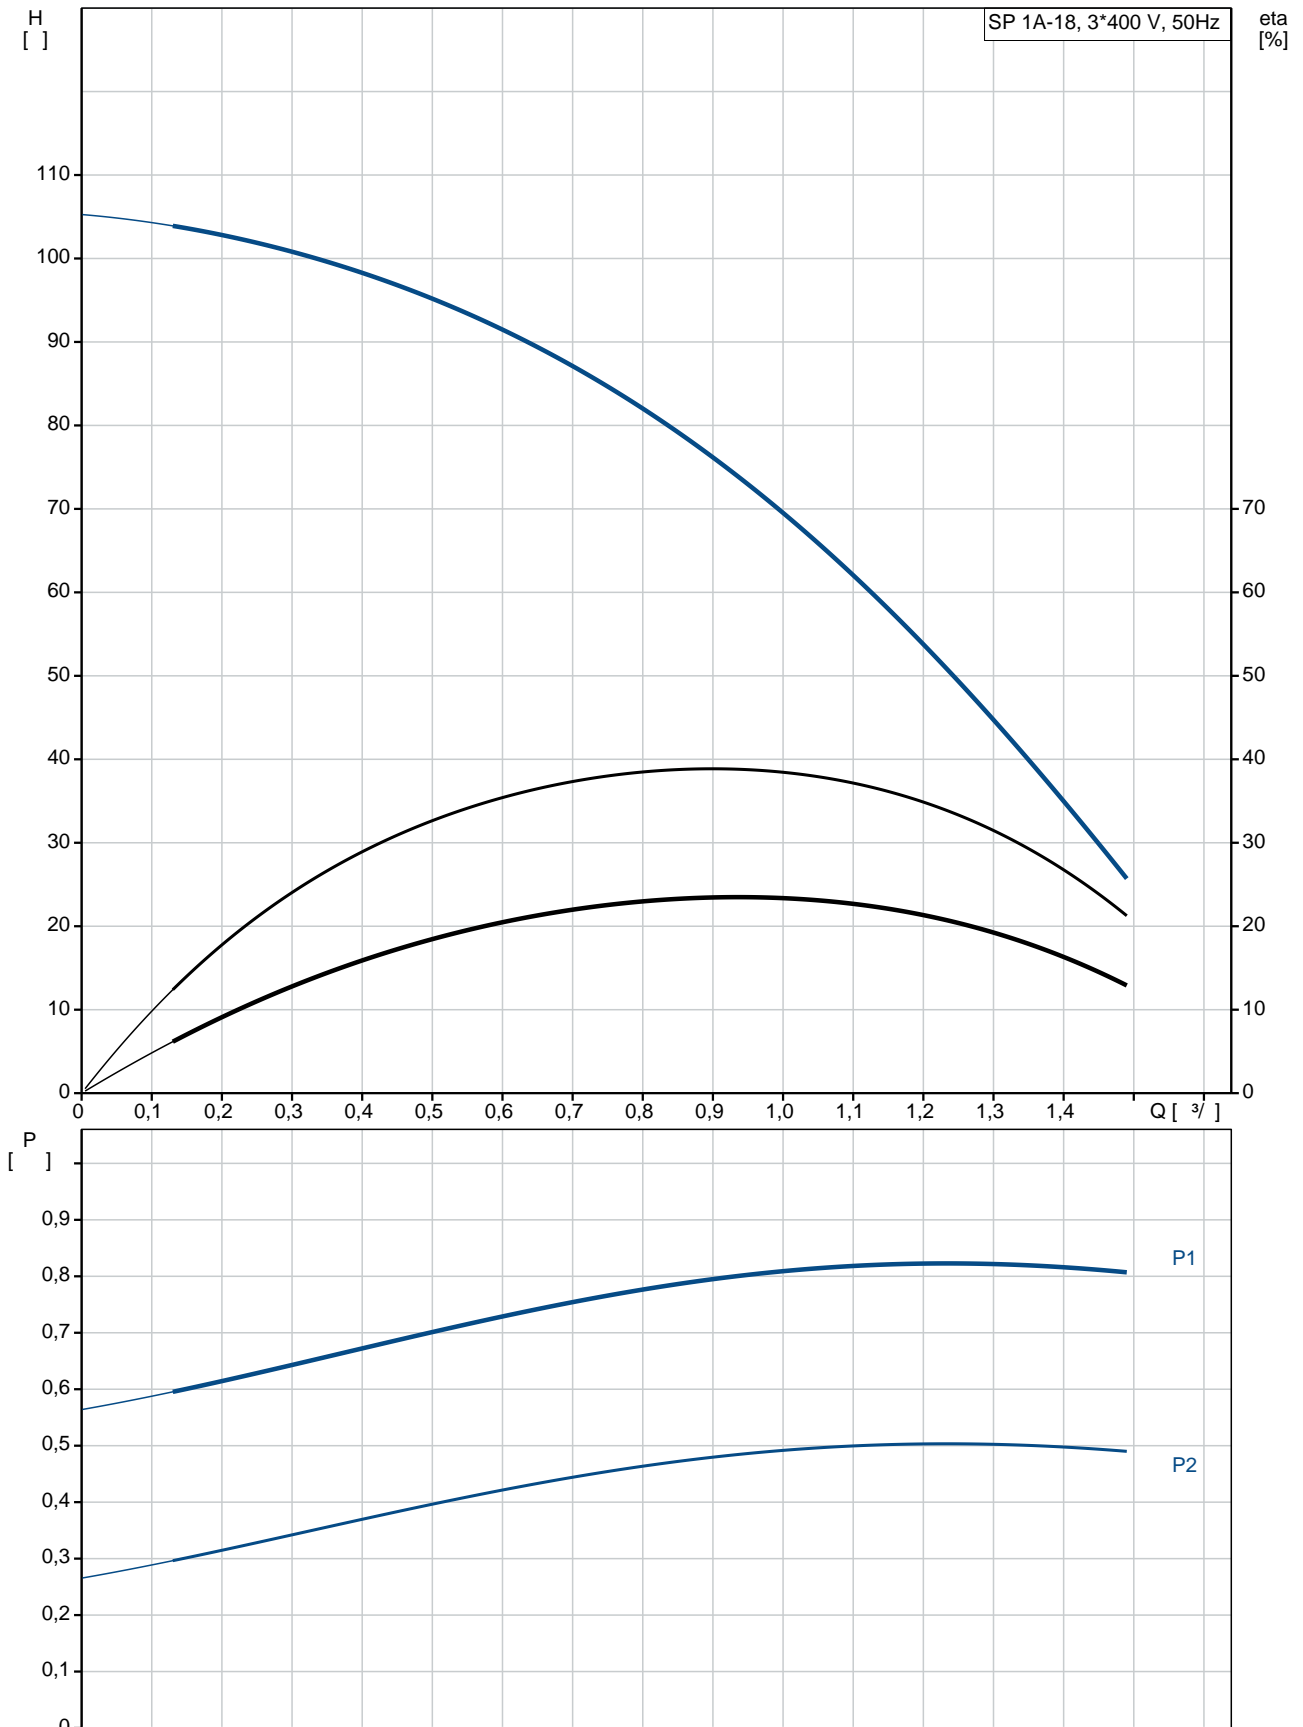


	SP 1A-18
	08001K18
EAN	5708601051210
	2900 /
	1 3/
	71
	18
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	GRUNDFOS
- P2:	0.55
( 2),	0.55
	50 Hz
	3 x 380-400-415
	2.00-2.20-2.35 A
	470-480-470 %
Cos	0.70-0.64-0.60
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192003

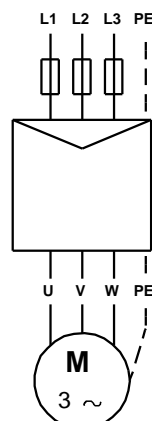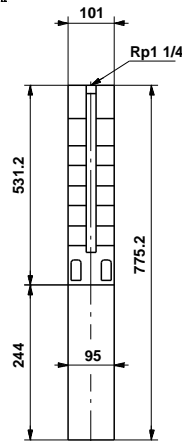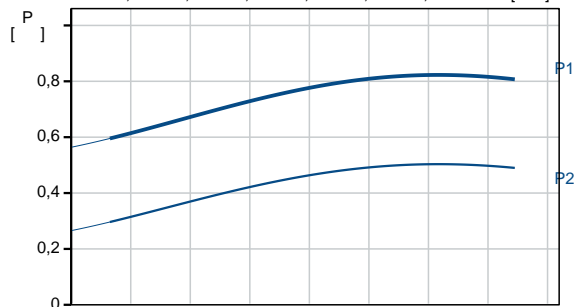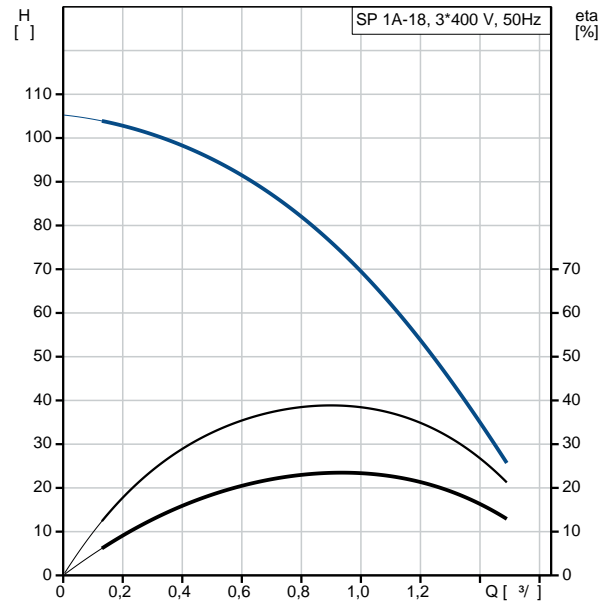


MEI :	0.70
ErP :	EuP / .
:	13.4
:	13.3
:	16.3 <sup>3</sup>
Danish VVS No.:	388311180
Swedish RSK No.:	5850287
Norwegian NRF no.:	9040803
C :	DK
:	8413702900

**08001K18 SP 1A-18 50**

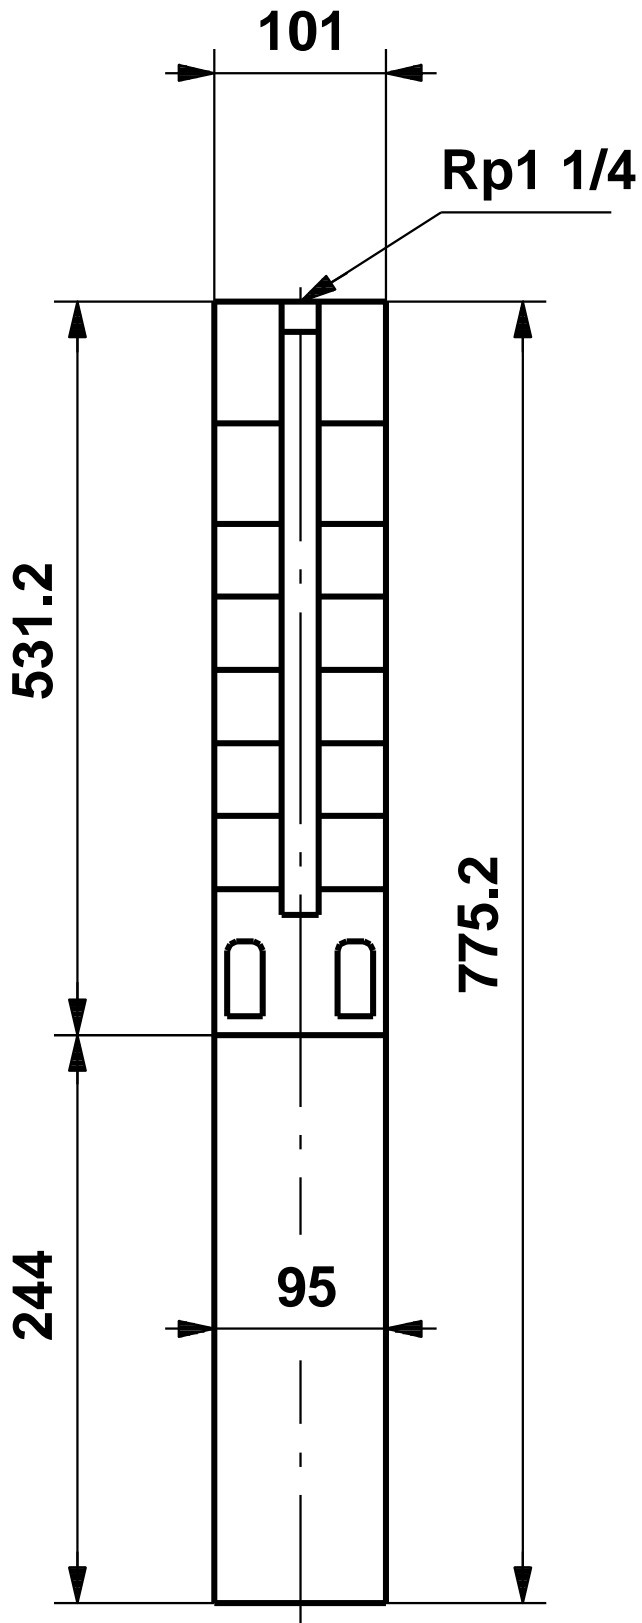

08001K18 SP 1A-18 50

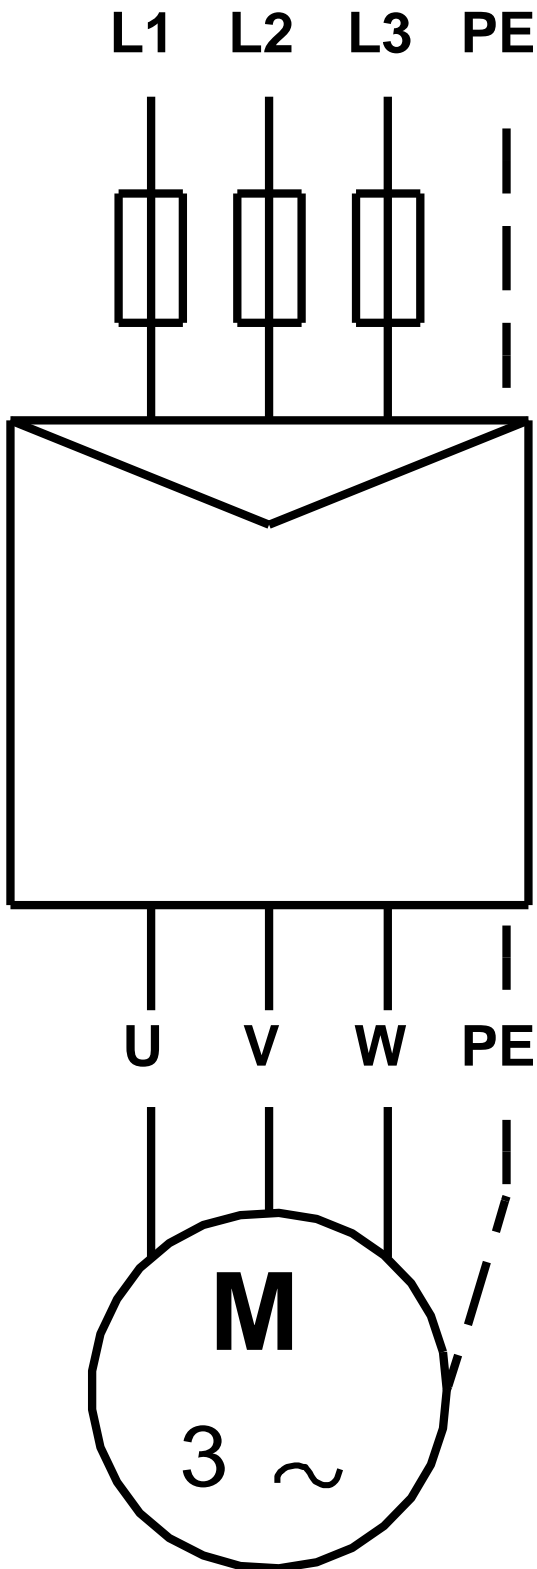

! [ ], .