

1 SP 1A-21



: 08001K21

, EN 1.4301 (AISI 304),

MS4020.55

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 .t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 1 ³/
 83
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch
 MS402
 - P2: 0.55
 (2), : 0.55
 50 Hz
 3 x 380-400-415
 2.00-2.20-2.35 A
 470-480-470 %
 Cos - : 0.70-0.64-0.60
 2850-2860-2870 /
 (IEC 34-5): IP68
 (IEC 85): B
 79192003
 MEI : 0.70
 ErP : EuP /
 14
 13.9
 16.3 ³
 Danish VVS No.: 388311210
 Swedish RSK No.: 5850288
 Norwegian NRF no.: 9040804
 C : DK
 8413702900

08001K21 SP 1A-21 50

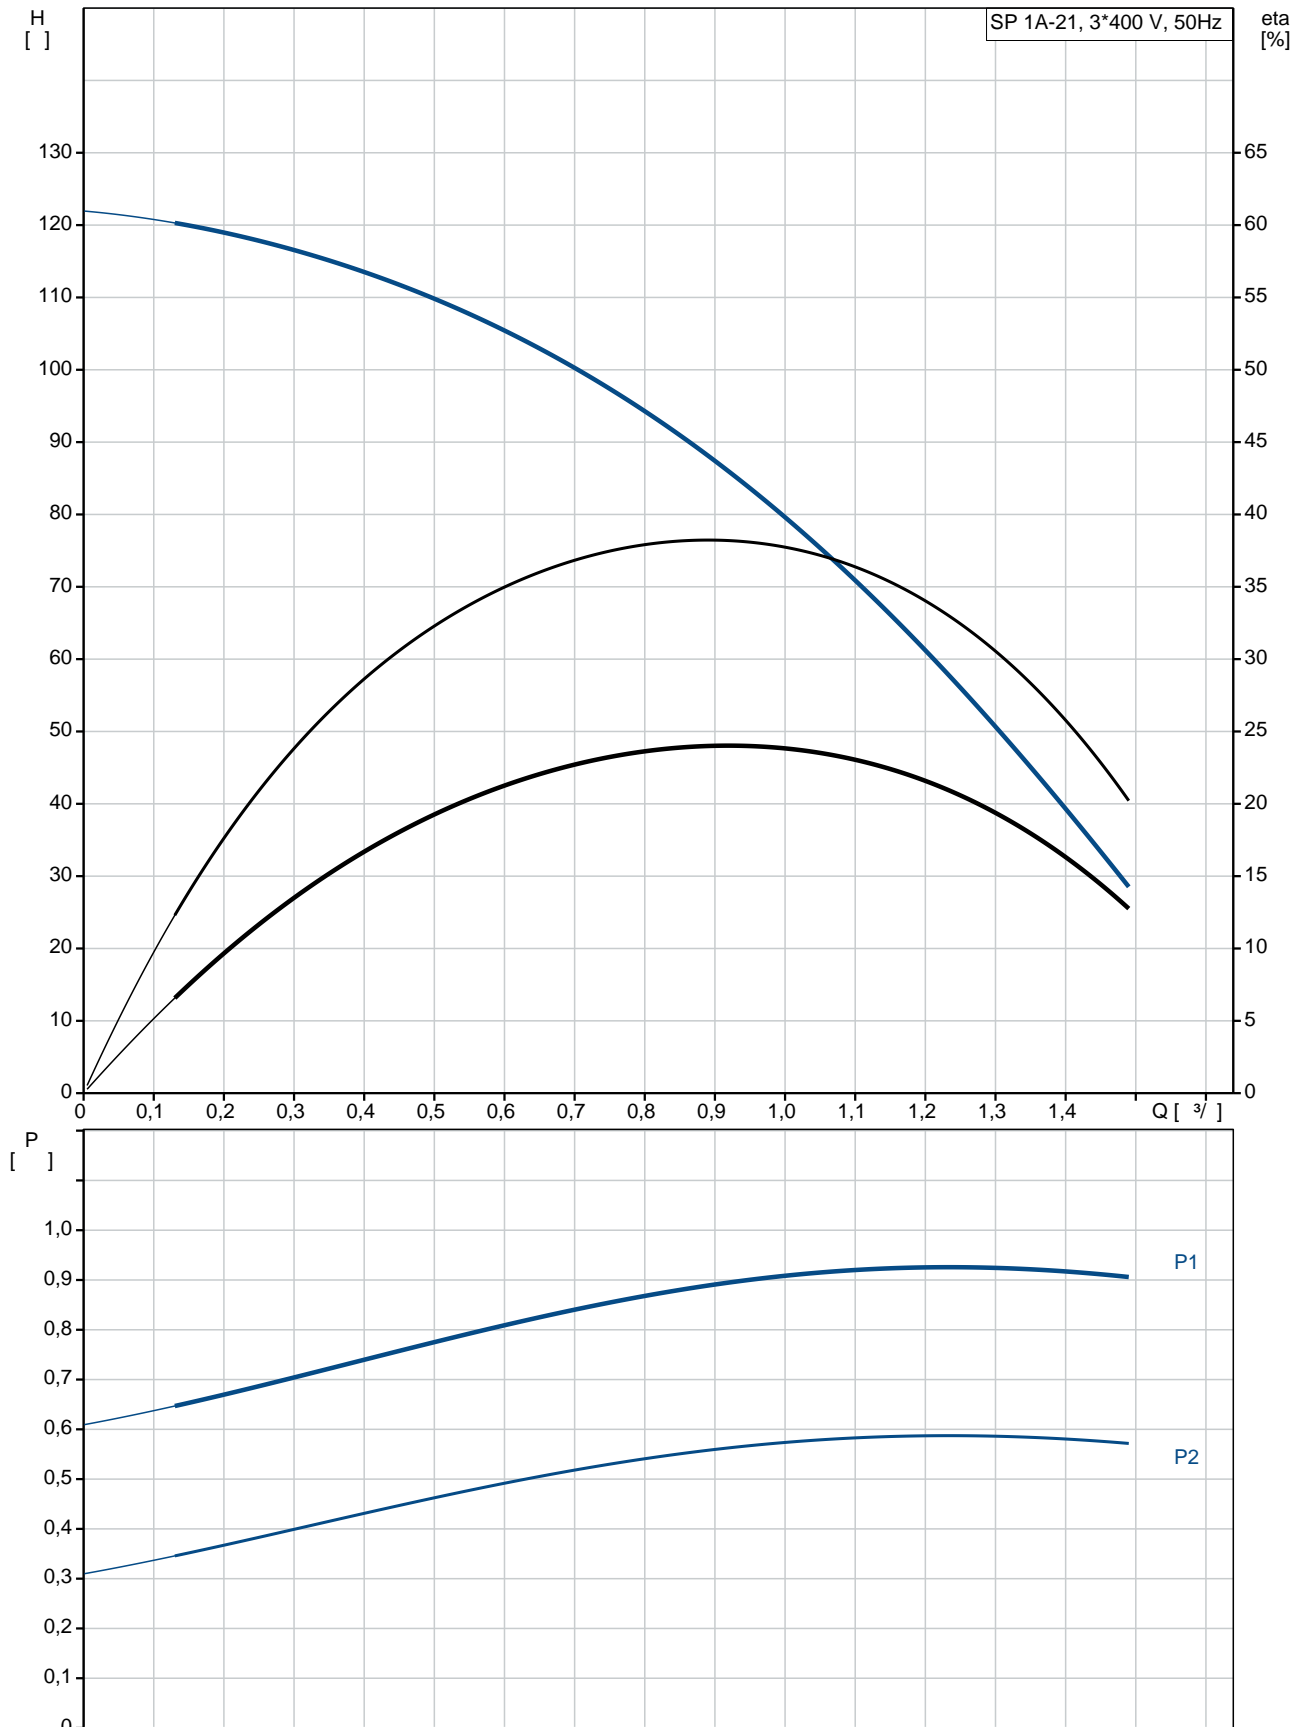

SP 1A-21
 EAN : 08001K21
 5708601051227
 2900 /
 1 3/
 83
 21
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 GRUNDFOS
 - P2: 0.55
 (2), 0.55

50 Hz
 3 x 380-400-415
 2.00-2.20-2.35 A
 470-480-470 %
 Cos - : 0.70-0.64-0.60
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192003

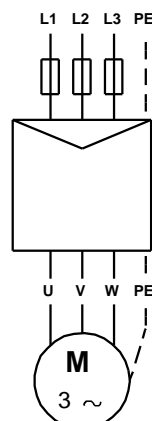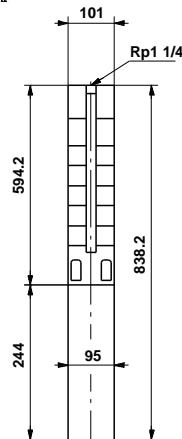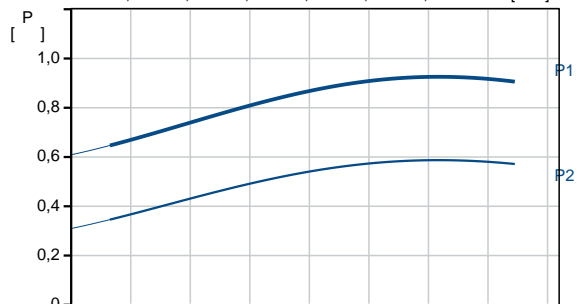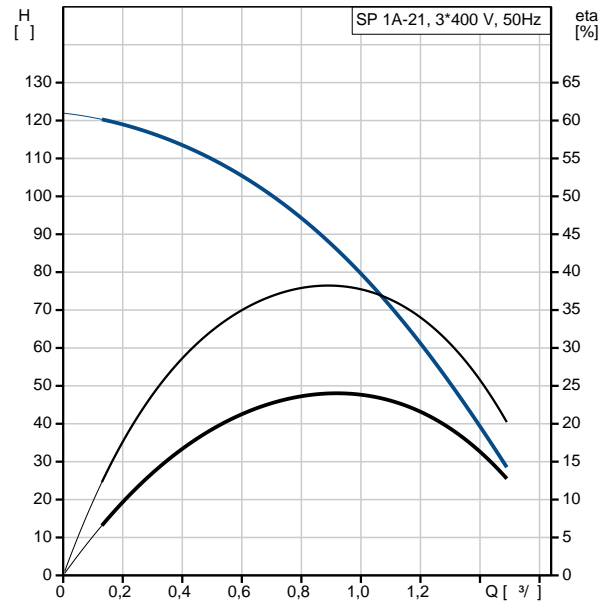

MEI :		0.70
ErP :	EuP	/ .
:		14
:		13.9
:		16.3 ³
Danish VVS No.:		388311210
Swedish RSK No.:		5850288
Norwegian NRF no.:		9040804
C :	DK	
:		8413702900

08001K21 SP 1A-21 50

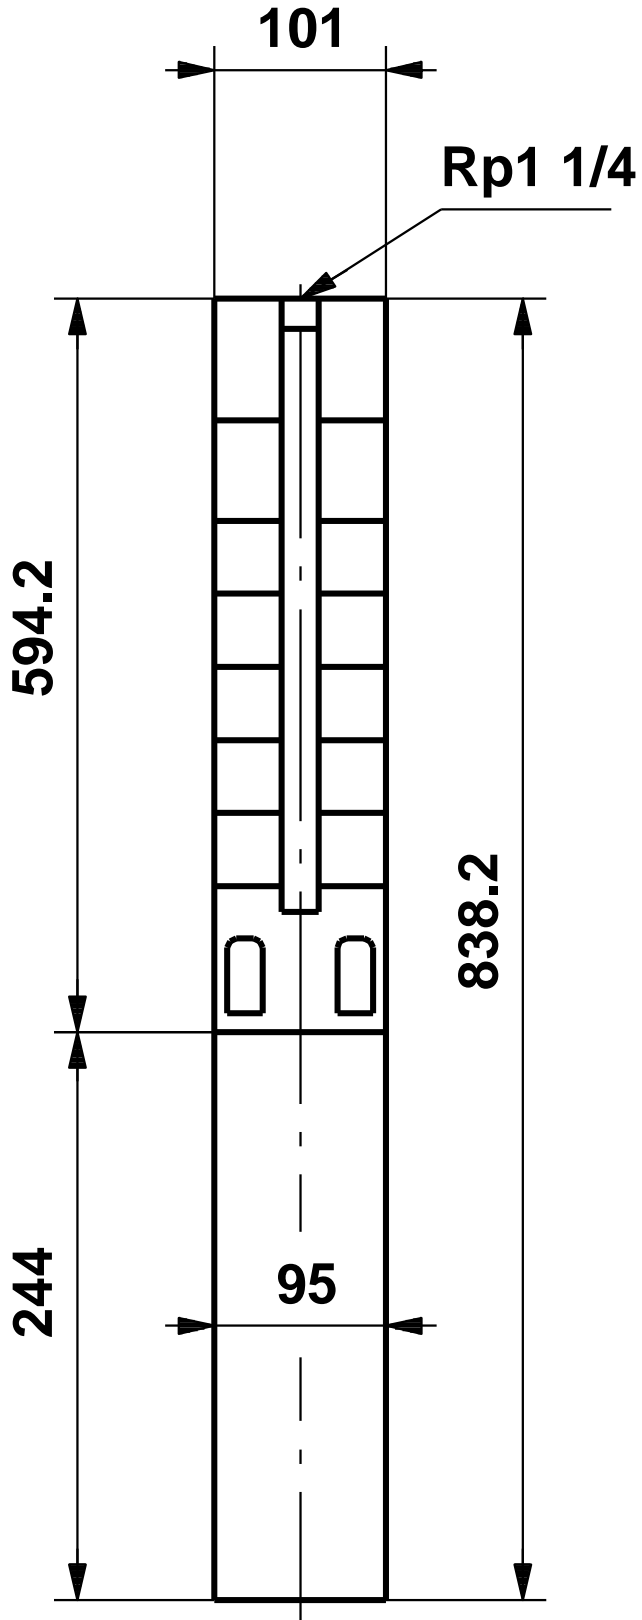

08001K21 SP 1A-21 50



! [], .