

1 SP 1A-28



: 08001K28

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 1 ³/₁₁₀
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/4
 : 4 inch
 :
 : MS402
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 2.15-2.30-2.40 A
 : 480-490-480 %
 Cos - : 0.75-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192004
 :
 MEI : 0.70
 ErP : EuP /
 : 16.7
 : 17
 : 21.7 ³
 Danish VVS No.: 388311280
 Swedish RSK No.: 5850289
 Norwegian NRF no.: 9041816
 C : DK
 : 8413702900

08001K28 SP 1A-28 50

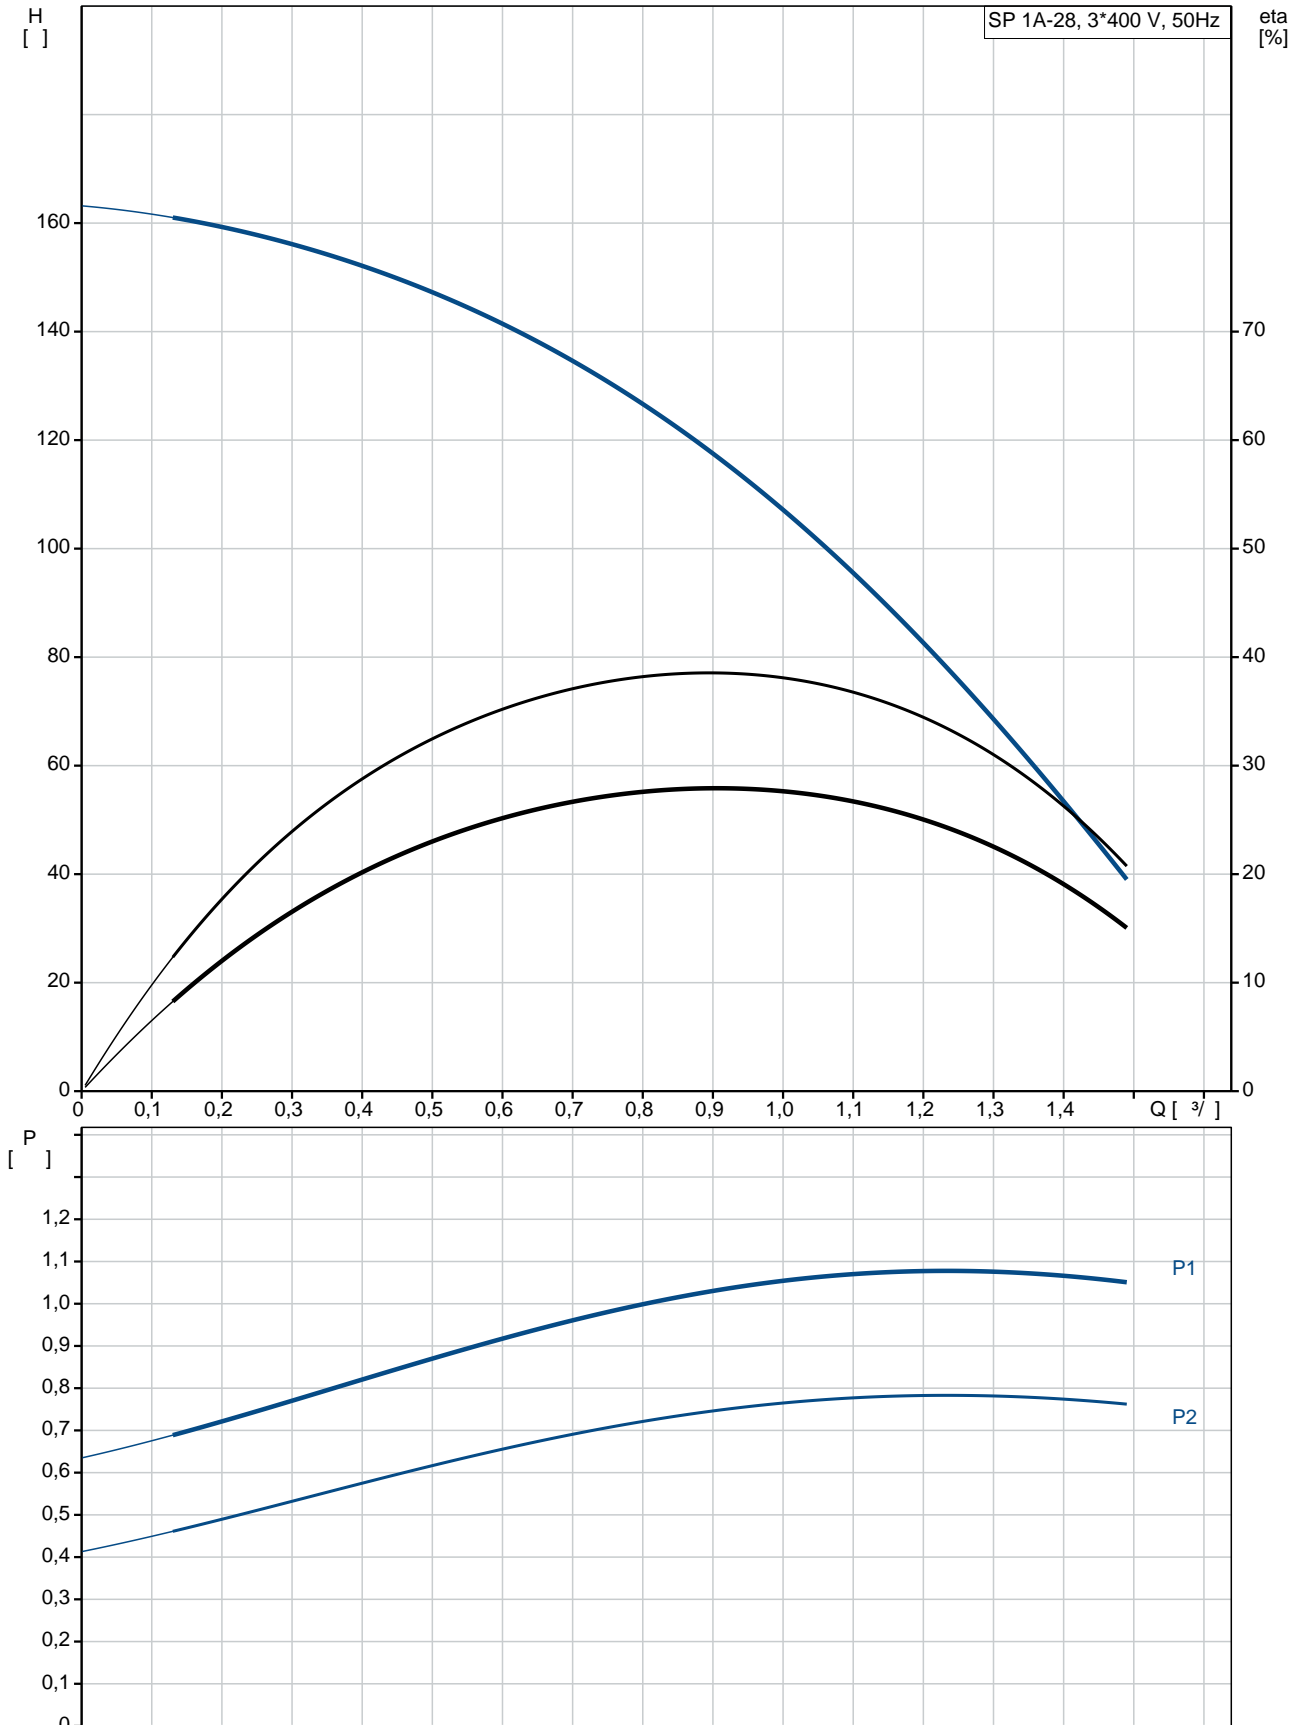

SP 1A-28
 EAN : 08001K28
 5708601051234

2900 /
 1 3/
 110
 28
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C

: 998.2 / 3

MS402
 GRUNDFOS

- P2: 0.75

(2), 0.75

50 Hz
 3 x 380-400-415

: 2.15-2.30-2.40 A

: 480-490-480 %





Cos - : 0.75-0.72-0.65

: 2850-2860-2870 /

(IEC 34-5): IP68


(IEC 85): B

: 79192004

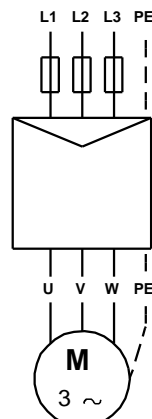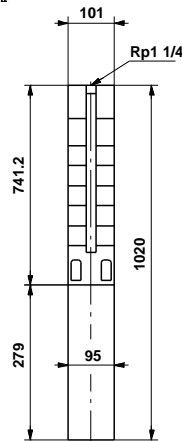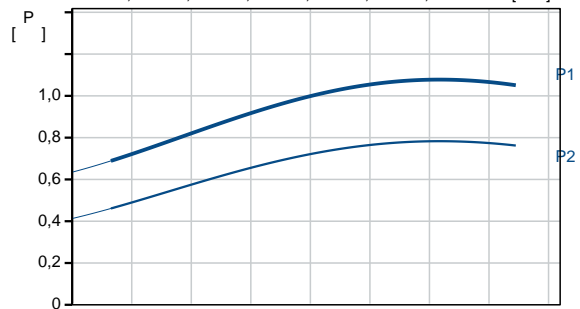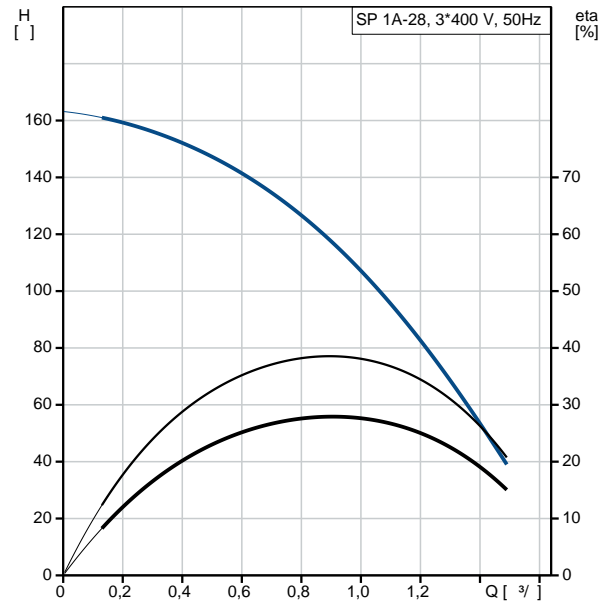

MEI :		0.70
ErP :	EuP	/ .
:		16.7
:		17
:		21.7 ³
Danish VVS No.:		388311280
Swedish RSK No.:		5850289
Norwegian NRF no.:		9041816
C :	DK	
:		8413702900

08001K28 SP 1A-28 50

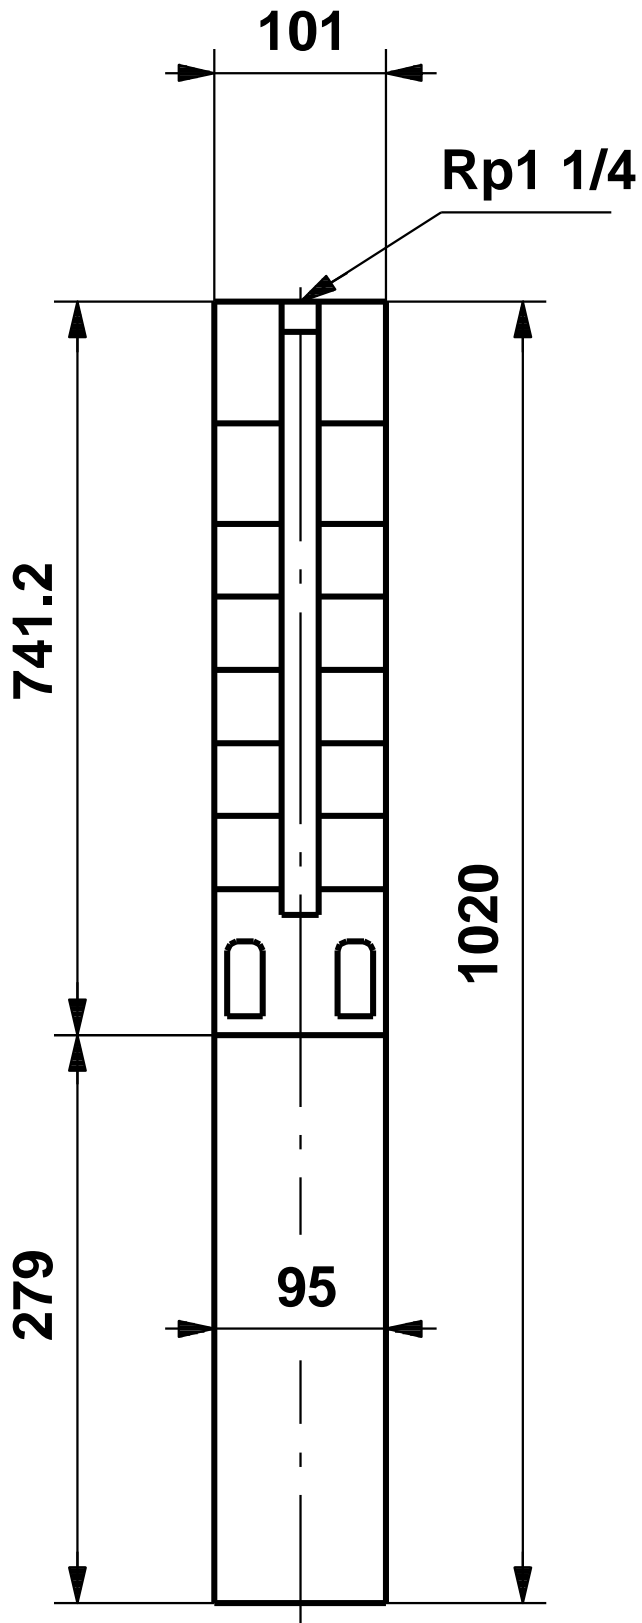

08001K28 SP 1A-28 50



!

[],