

1 SP 1A-9



: 08002B09

, EN 1.4301 (AISI 304),

MS4020.37

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 1 <sup>3</sup>/<sub>35</sub>  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304





DIN W.-Nr. 1.4301  
 AISI 304

: Rp1 1/4  
 : 4 inch  
 :  
 : MS402  
 CSIR  
 - P2: 0.37  
 ( 2), : 0.37  
 : 50 Hz  
 : 1 x 230  
 : 3.95 A  
 : 370 %  
 Cos - : 0.77  
 : 2860 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79213102  
 :  
 MEI : 0.70  
 ErP : EuP /  
 : 12.2  
 : 11.8  
 : 10.8 <sup>3</sup>  
 Swedish RSK No.: 5850371  
 Norwegian NRF no.: 9040601  
 C : DK  
 : 8413702900

## 08002B09 SP 1A-9 50

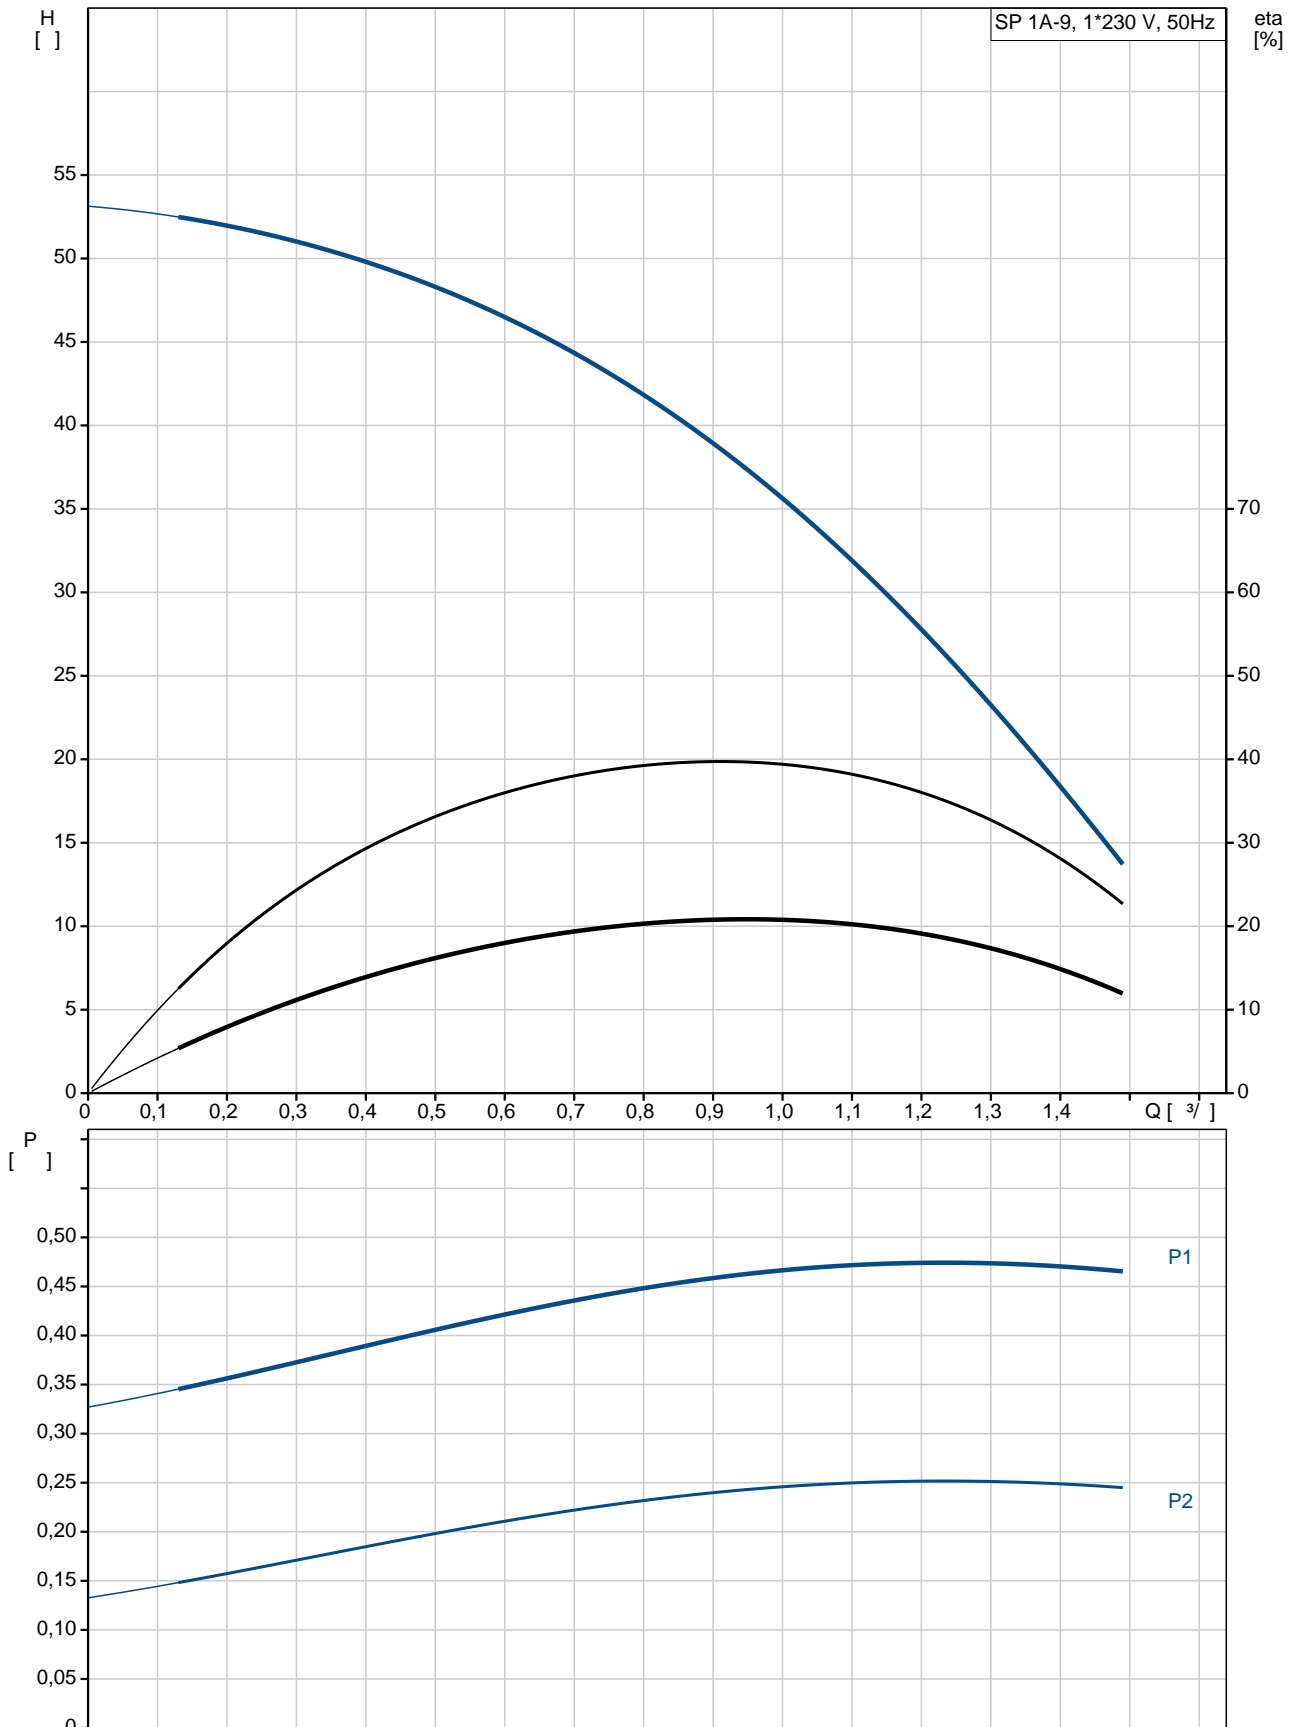


|                             |                   |
|-----------------------------|-------------------|
|                             | SP 1A-9           |
|                             | 08002B09          |
| EAN                         | 5700391120428     |
|                             | 2900 /            |
|                             | 1 3/              |
|                             | 35                |
|                             | 9                 |
|                             | NONE              |
|                             | LIPSEAL           |
|                             | CE,EAC            |
|                             | ISO9906:2012 3B   |
|                             | A                 |
|                             | YES               |
|                             | T40               |
|                             | SPLINE            |
|                             | EN 1.4301         |
|                             | AISI AISI 304     |
|                             | EN 1.4301         |
|                             | AISI AISI 304     |
|                             | DIN W.-Nr. 1.4301 |
|                             | AISI 304          |
|                             | Rp1 1/4           |
|                             | 4 inch            |
| Maximum liquid temperature: | 40 °C             |
| . t 0,15 /                  | 40 °C             |
|                             | 20 °C             |
|                             | 998.2 / 3         |
|                             | MS402             |
|                             | CSIR              |
|                             | GRUNDFOS          |
| - P2:                       | 0.37              |
| ( 2),                       | 0.37              |
|                             | 50 Hz             |
|                             | 1 x 230           |
|                             | 3.95 A            |
|                             | 370 %             |
| Cos                         | 0.77              |
|                             | 2860 /            |
| (IEC 34-5):                 | IP68              |
| (IEC 85):                   | B                 |
|                             | CONTACT           |
|                             | 79213102          |

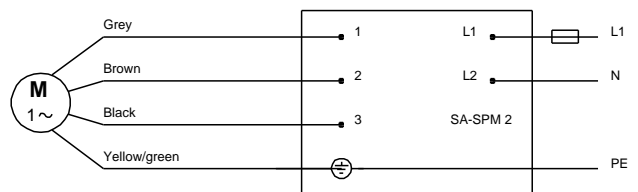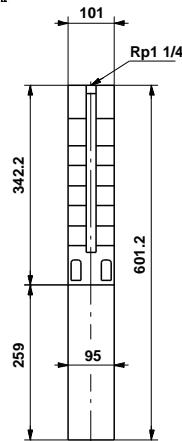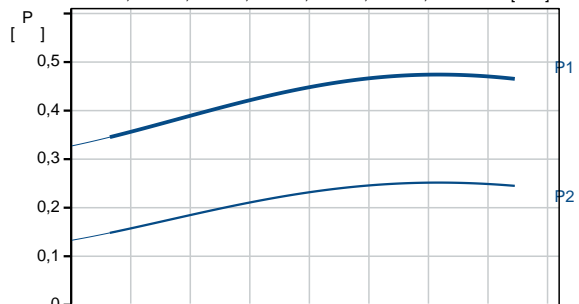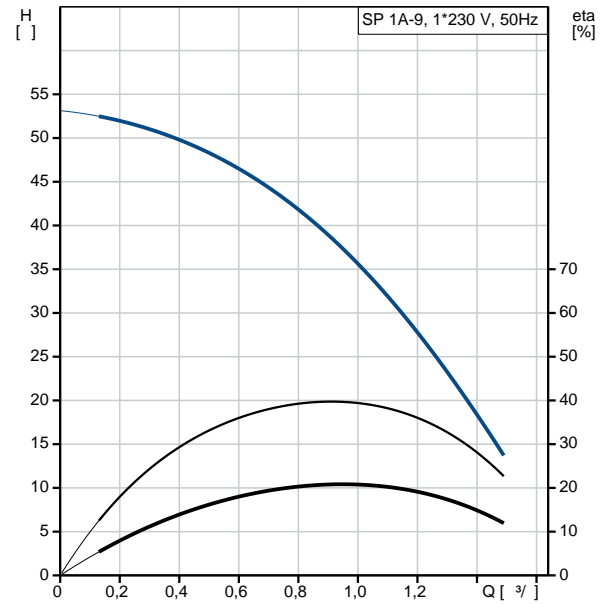

|                    |                   |
|--------------------|-------------------|
| :                  |                   |
| MEI :              | 0.70              |
| ErP :              | EuP / .           |
| :                  | 12.2              |
| :                  | 11.8              |
| :                  | 10.8 <sup>3</sup> |
| Swedish RSK No.:   | 5850371           |
| Norwegian NRF no.: | 9040601           |
| C :                | DK                |
| :                  | 8413702900        |

08002B09 SP 1A-9 50

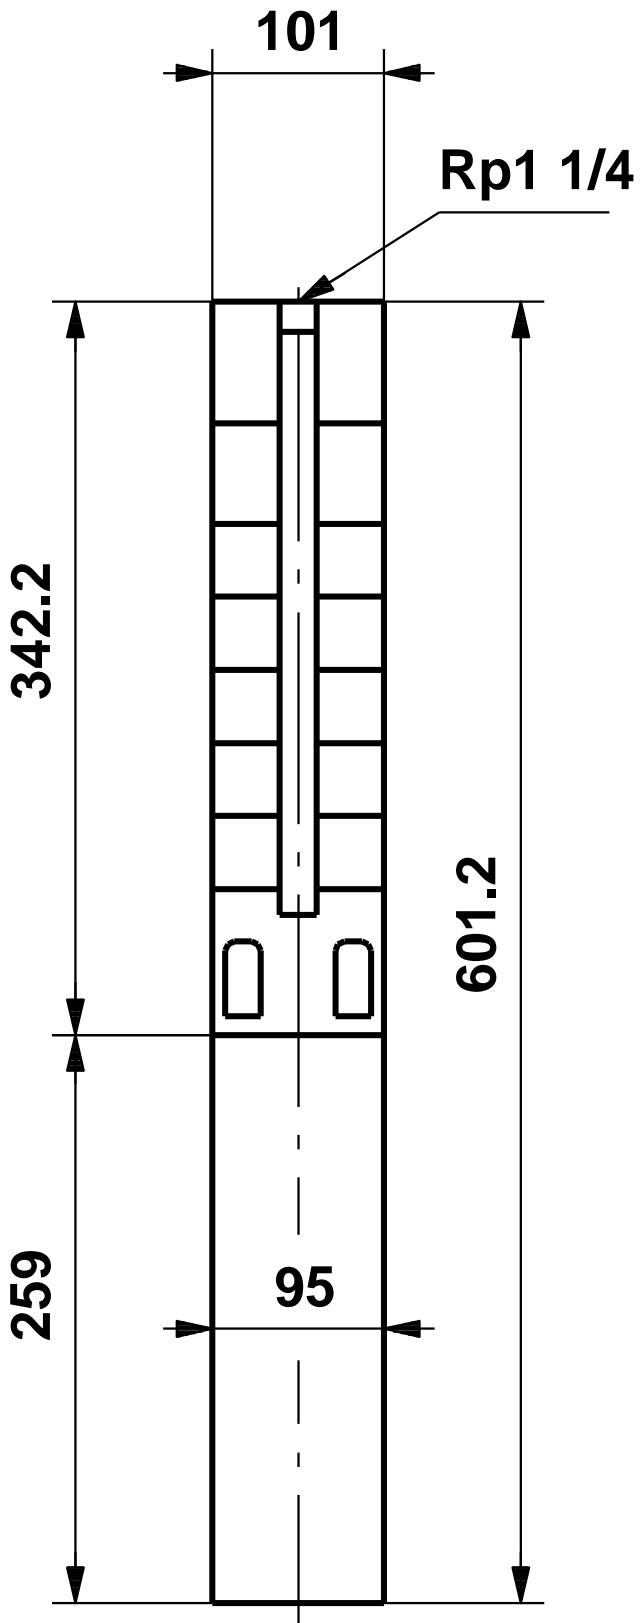

## 08002B09 SP 1A-9 50

