

1 SP 1A-28



: 08002B28

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C  
998.2 / <sup>3</sup>

: 2900 /

1 <sup>3</sup>/  
110

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE


EN 1.4301  
AISI AISI 304

EN 1.4301  
AISI AISI 304





DIN W.-Nr. 1.4301  
AISI 304

Rp1 1/4  
 4 inch  
 MS402  
 CSIR  
 - P2: 0.75  
 ( 2), : 0.75  
 50 Hz  
 1 x 230  
 7.45 A  
 390 %  
 Cos - : 0.79  
 2860 /  
 (IEC 34-5): IP68  
 (IEC 85): B  
 79213104  
 MEI : 0.70  
 ErP : EuP /  
 17.9  
 18.2  
 21.7 <sup>3</sup>  
 Swedish RSK No.: 5850375  
 Norwegian NRF no.: 9040606  
 C : DK  
 8413702900

## 08002B28 SP 1A-28 50

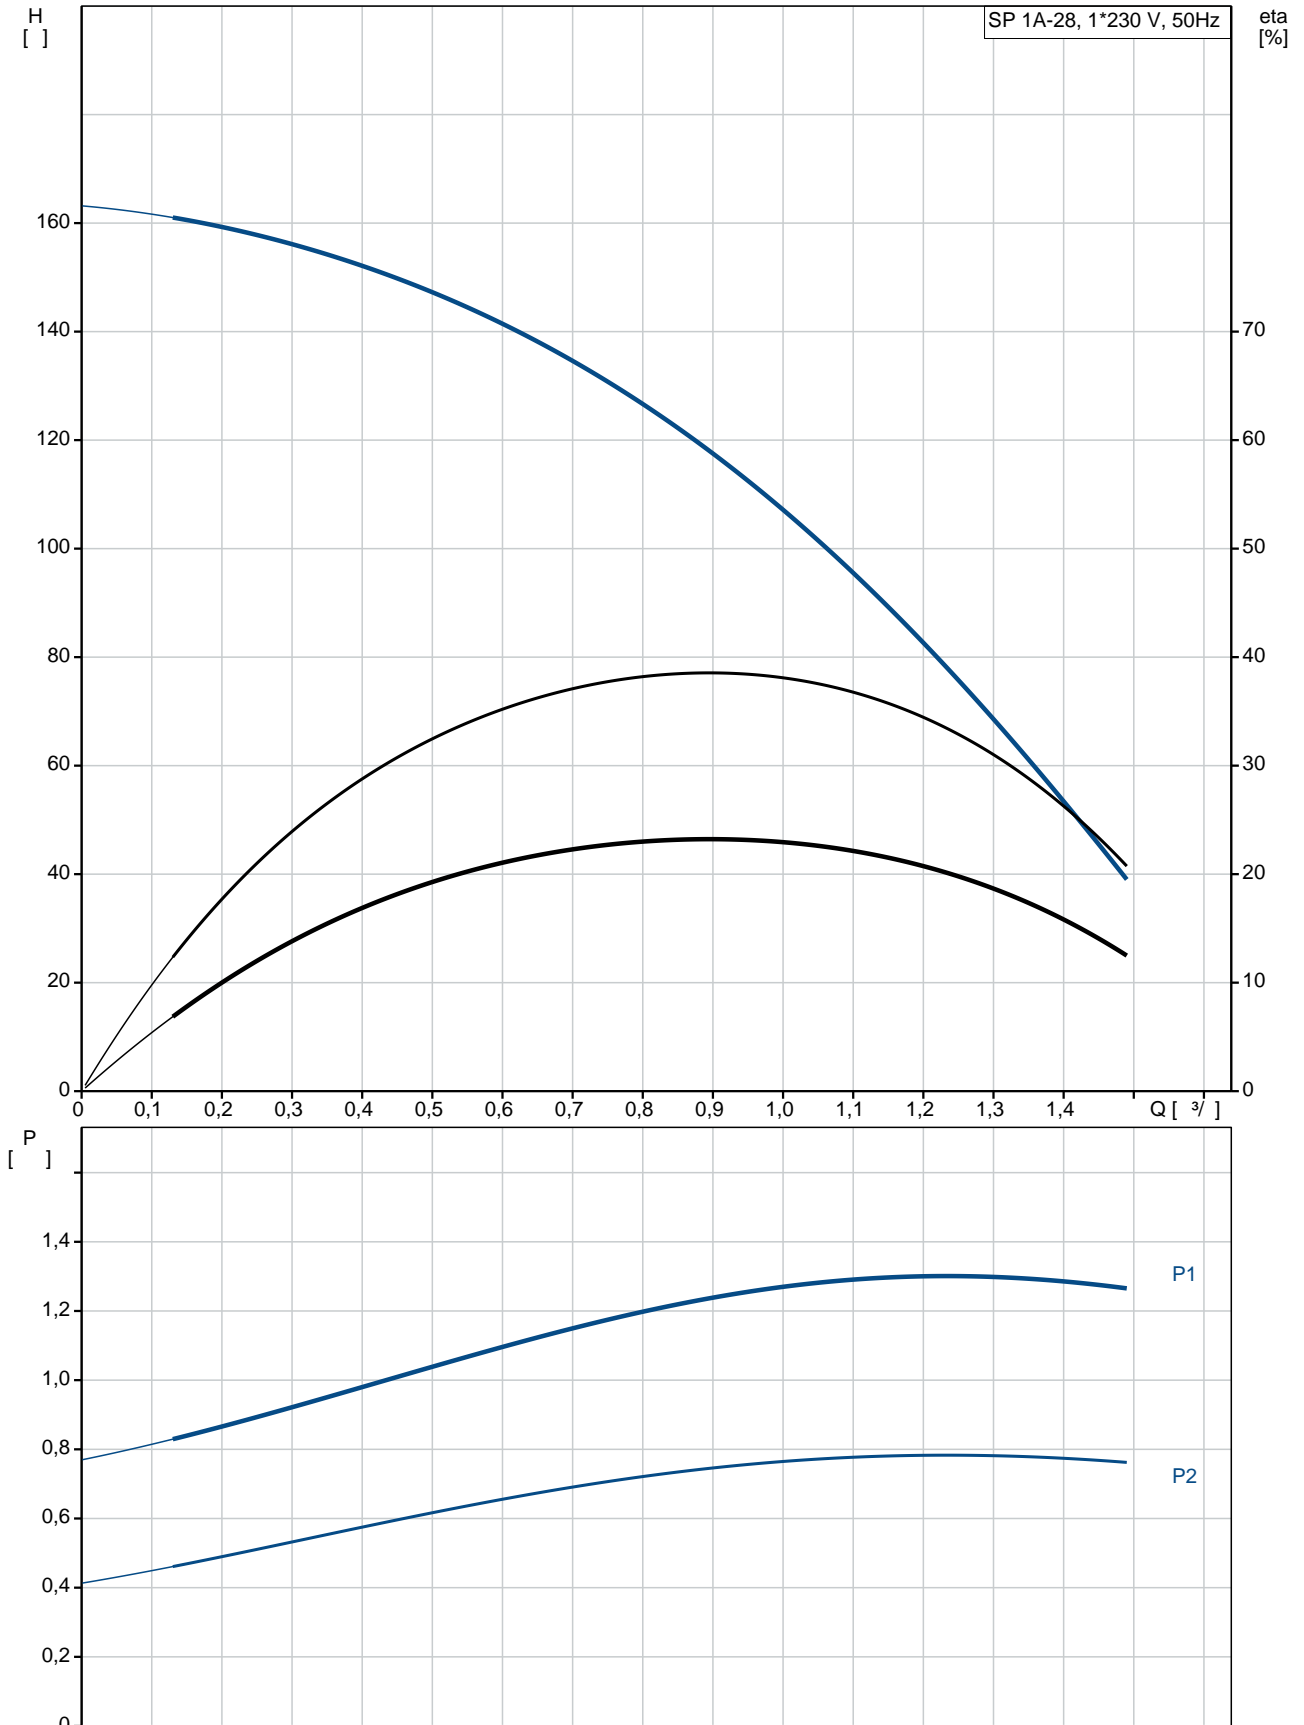


	SP 1A-28
	08002B28
EAN	5700391120589
	2900 /
	1 3/
	110
	28
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	CSIR
	GRUNDFOS
- P2:	0.75
( 2),	0.75
	50 Hz
	1 x 230
	7.45 A
	390 %
Cos	0.79
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	CONTACT
	79213104

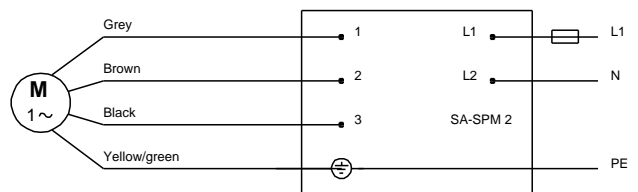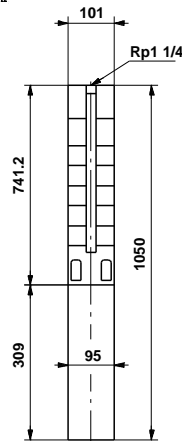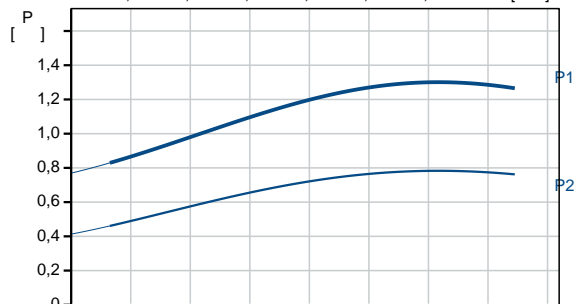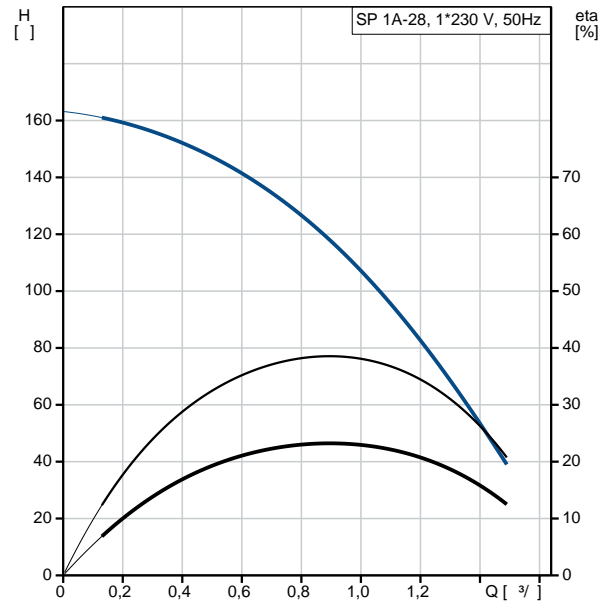

:	
MEI :	0.70
ErP :	EuP / .
:	17.9
:	18.2
:	21.7 <sup>3</sup>
Swedish RSK No.:	5850375
Norwegian NRF no.:	9040606
C :	DK
:	8413702900

**08002B28 SP 1A-28 50**

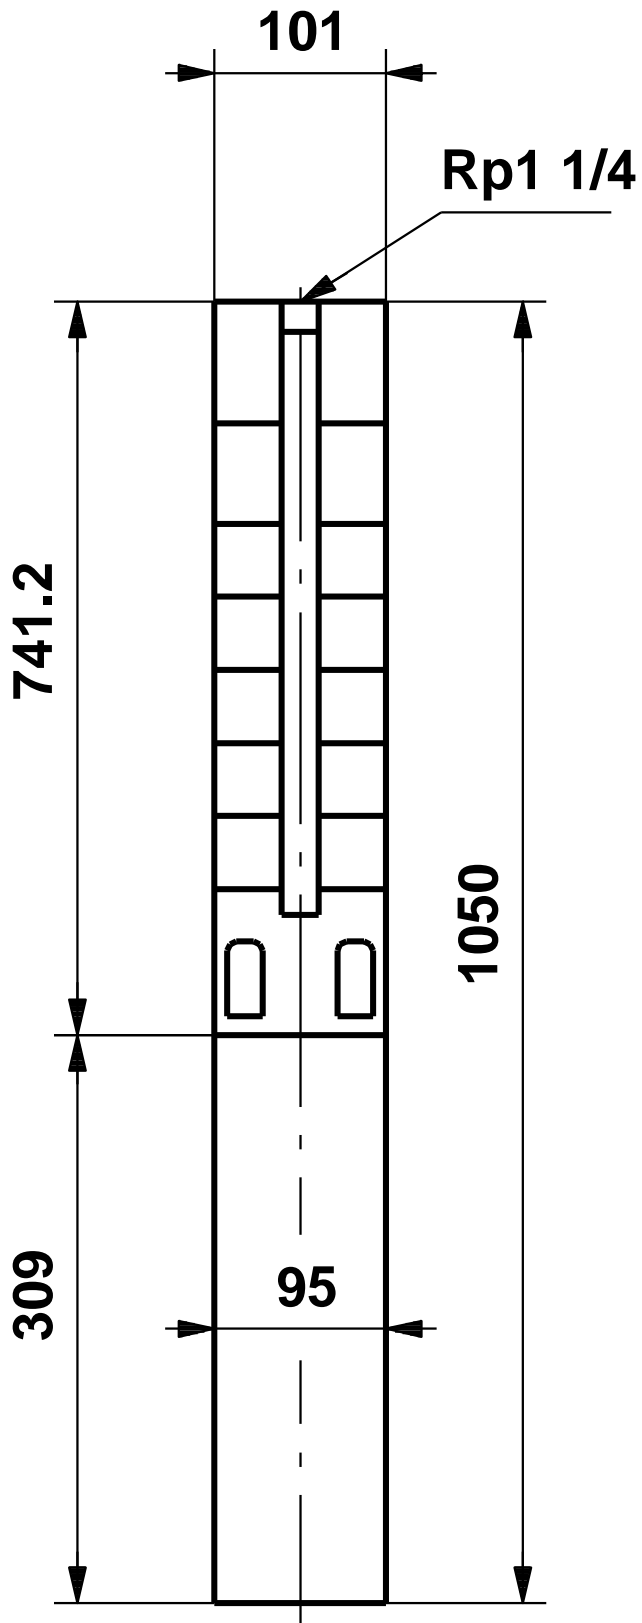

## 08002B28 SP 1A-28 50

