

1 SP 1A-42



: 08101K42

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : CYLINDRICAL


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 3 x 380-400-415
 : 3.25-3.40-3.65 A
 : 480-480-470 %
 Cos - : 0.76-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192005
 :
 MEI : 0.70
 ErP : EuP / .
 : 18.5
 : 26.9
 : 21.7 ³
 Danish VVS No.: 388311420
 Swedish RSK No.: 5850291
 Norwegian NRF no.: 9040807
 C : DK
 : 8413702900

08101K42 SP 1A-42 50

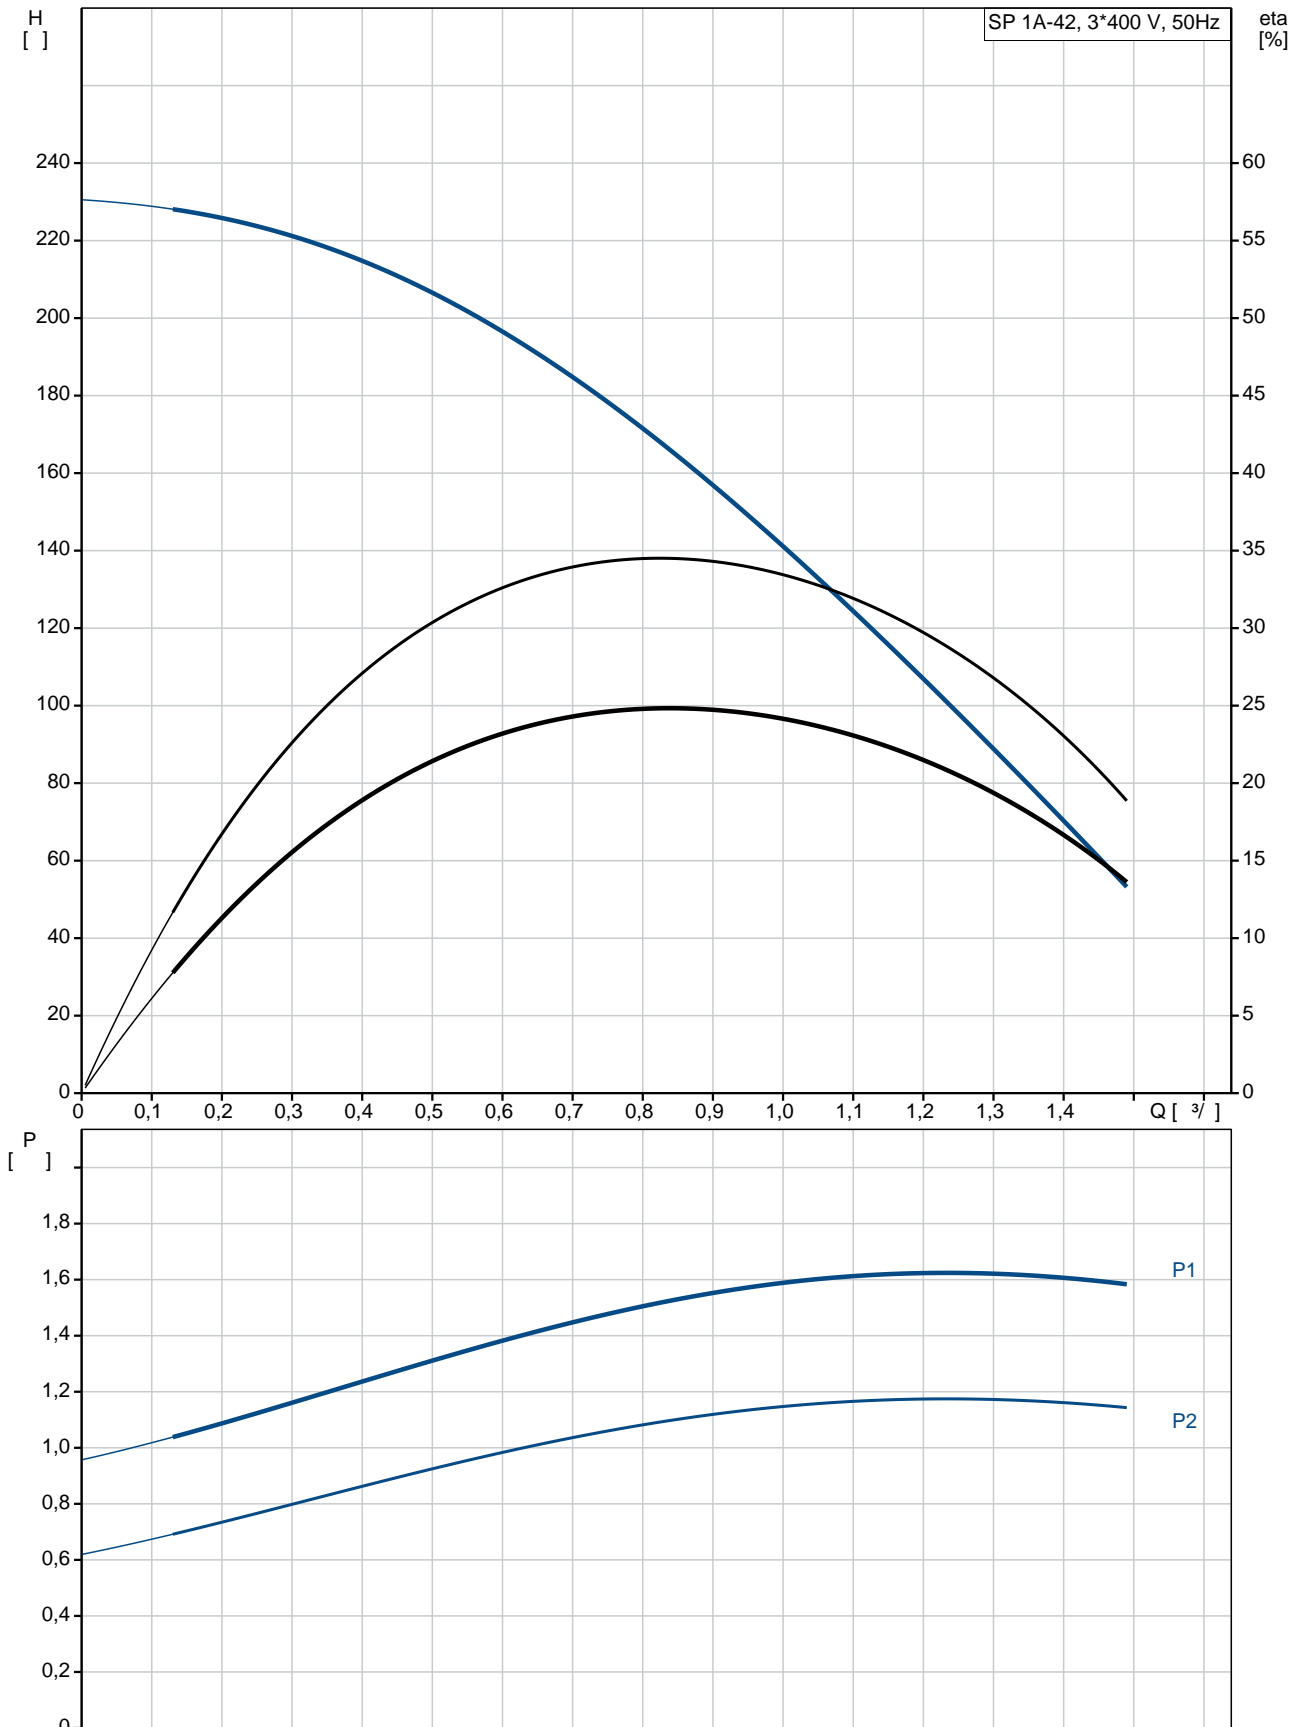

SP 1A-42
 EAN : 08101K42
 5708601051258

2900 /
 1 3/
 147
 42
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 CYLINDRICAL

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 GRUNDFOS
 - P2: 1.1
 (2), 1.1

50 Hz
 3 x 380-400-415
 3.25-3.40-3.65 A
 480-480-470 %
 Cos - : 0.76-0.72-0.65
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192005

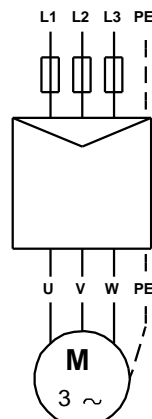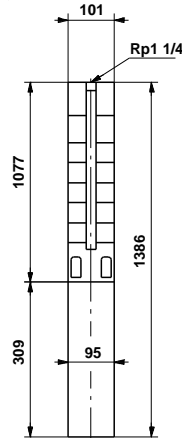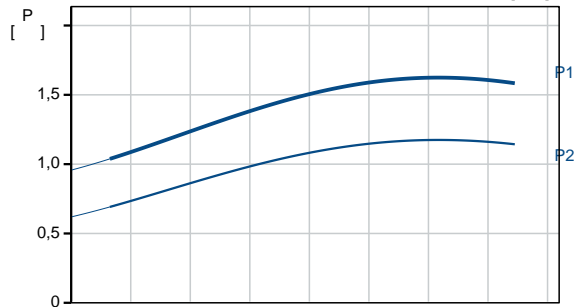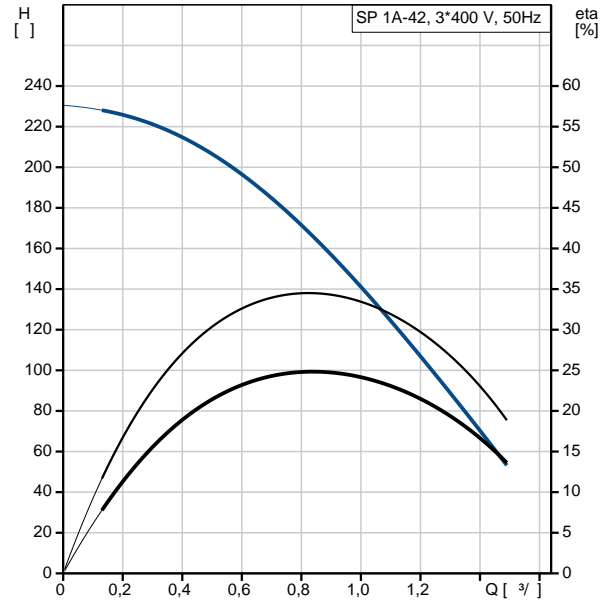


MEI :	0.70
ErP :	EuP / .
:	18.5
:	26.9
:	21.7 ³
Danish VVS No.:	388311420
Swedish RSK No.:	5850291
Norwegian NRF no.:	9040807
C :	DK
:	8413702900

08101K42 SP 1A-42 50

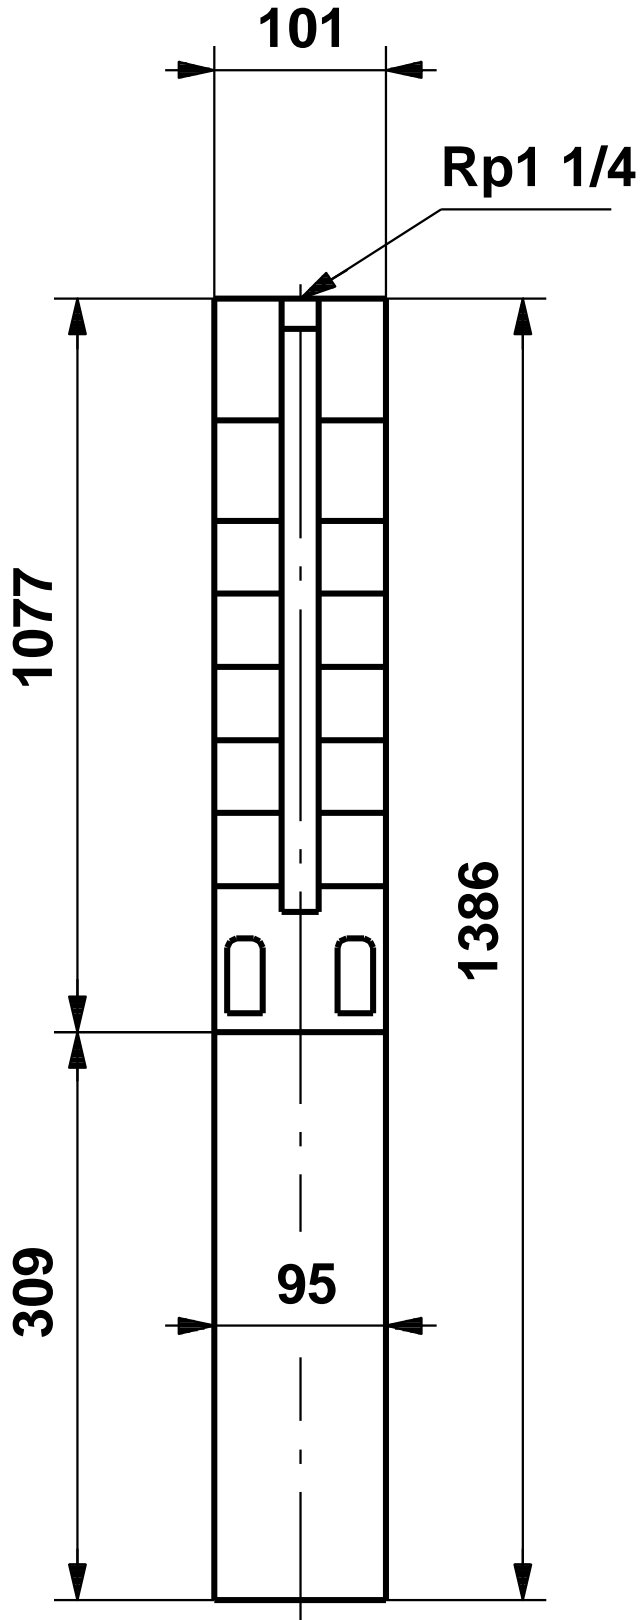

08101K42 SP 1A-42 50

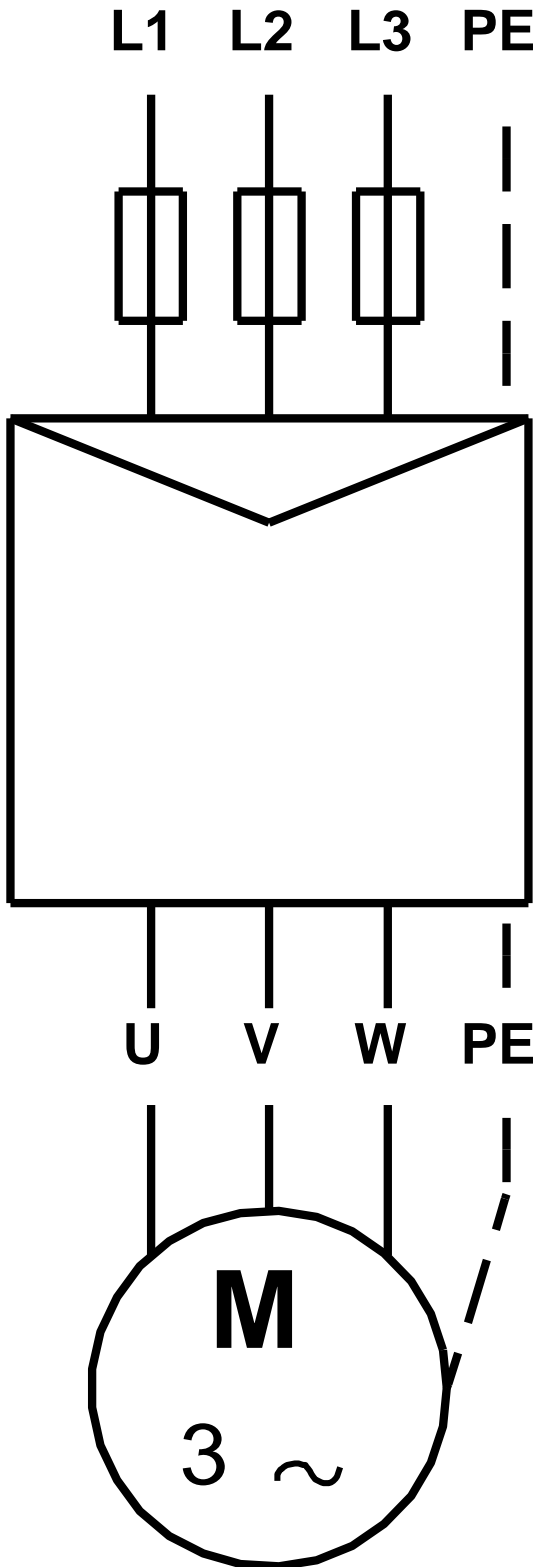

! [], .