

1 SP 1A-57



: 08102B57

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : CYLINDRICAL


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 1 x 230
 : 10.2 A
 : 460 %
 Cos - : 0.98
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213106
 :
 ErP : MEI : 0.70
 : EuP /
 : 22.3
 : 36.8
 : 68³
 C : DK
 : 8413702900

08102B57 SP 1A-57 50

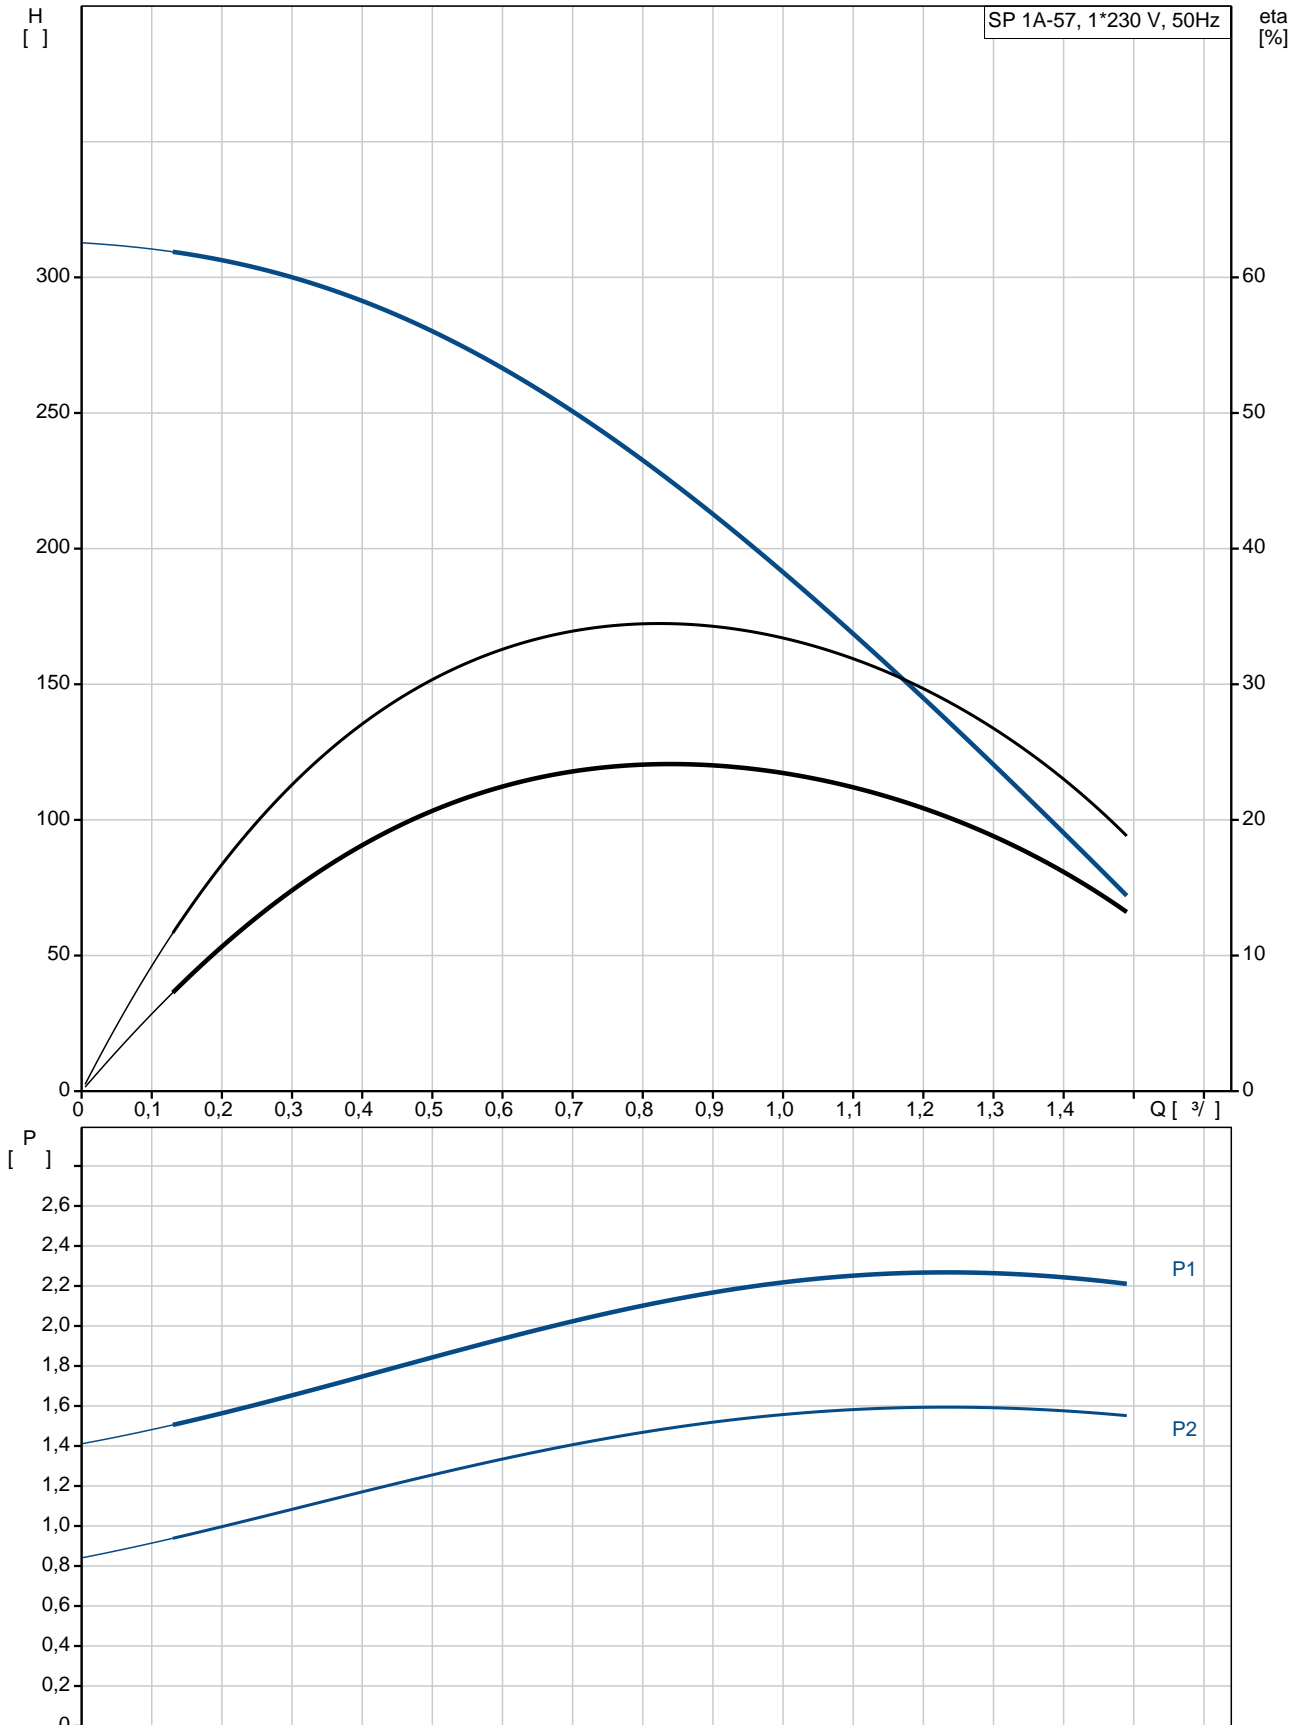

SP 1A-57
 08102B57
 EAN : 5700391256912
 2900 /
 1 3/
 200
 57
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 CYLINDRICAL

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / ³

MS402
 CSCR
 GRUNDFOS
 - P2: 1.5
 (2), 1.5

50 Hz
 1 x 230
 10.2 A
 460 %
 Cos - : 0.98
 2860 /


(IEC 34-5): IP68
 (IEC 85): B

79213106

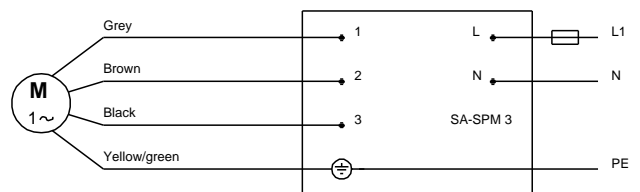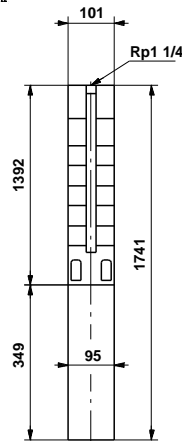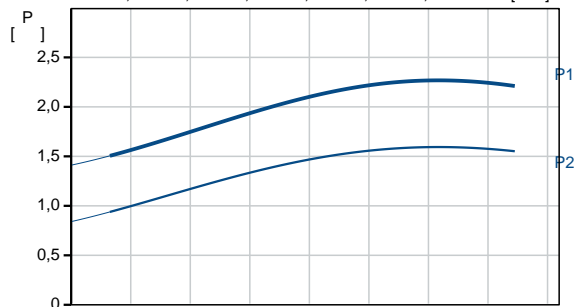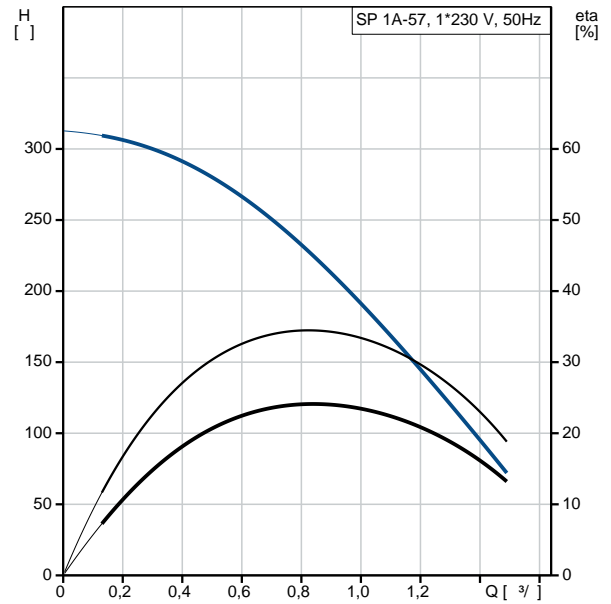

:	
MEI :	0.70
ErP :	EuP / .
:	22.3
:	36.8
:	68 ³
C :	DK
:	8413702900

08102B57 SP 1A-57 50

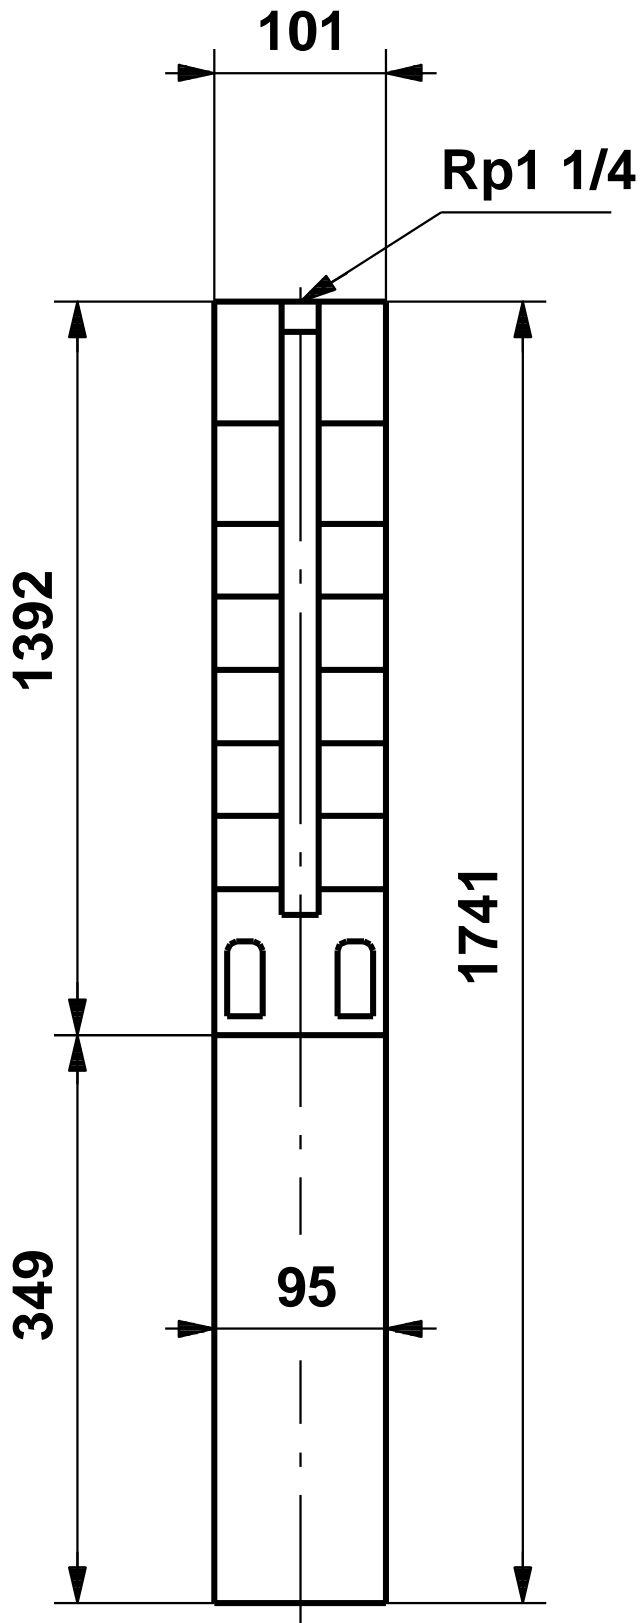

08102B57 SP 1A-57 50

