

1 SP 2A-9



: 09002B09

, EN 1.4301 (AISI 304),

MS4020.37

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 2 ³/
 : 36
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

: Rp1 1/4
 : 4 inch
 :
 : MS402
 CSIR
 - P2: 0.37
 (2), : 0.37
 : 50 Hz
 : 1 x 230
 : 3.95 A
 : 370 %
 Cos - : 0.77
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213102
 :
 MEI : 0.70
 ErP : EuP /
 : 10.6
 : 11.9
 : 11.5 ³
 Swedish RSK No.: 5852696
 Norwegian NRF no.: 9040642
 C : DK
 : 8413702900

09002B09 SP 2A-9 50

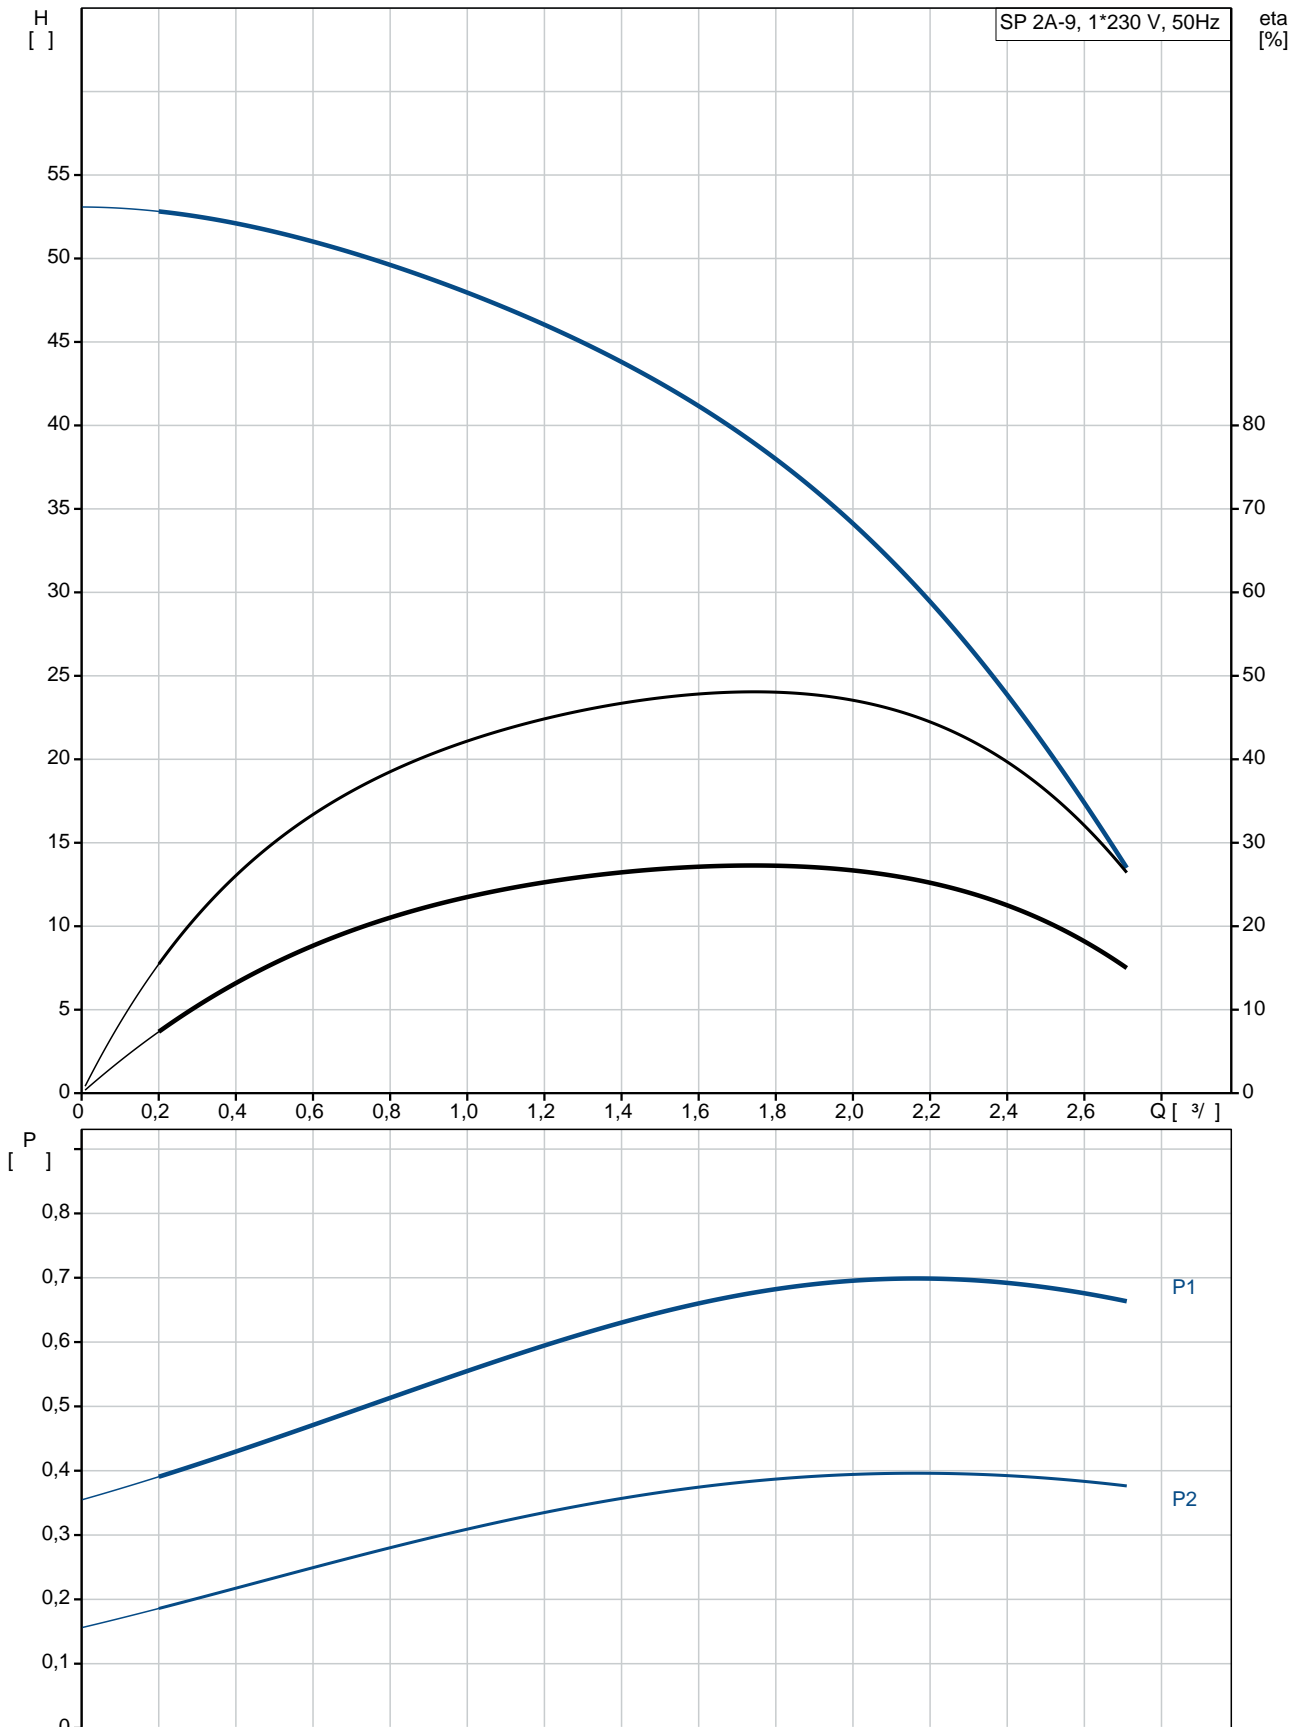


	SP 2A-9
	09002B09
EAN	5700391121753
	2900 /
	2 3/
	36
	9
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
.t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	CSIR
	GRUNDFOS
- P2:	0.37
(2),	0.37
	50 Hz
	1 x 230
	3.95 A
	370 %
Cos	0.77
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	CONTACT
	79213102

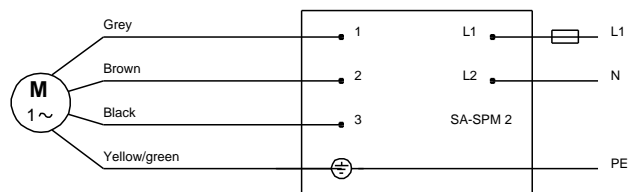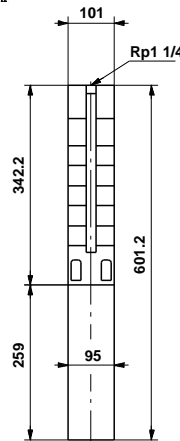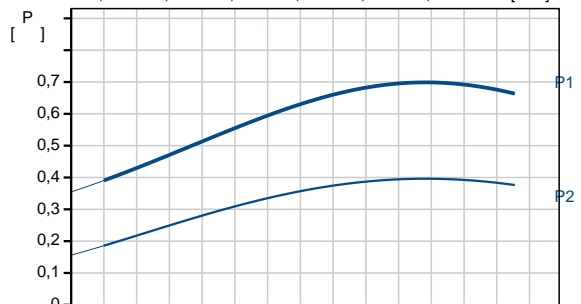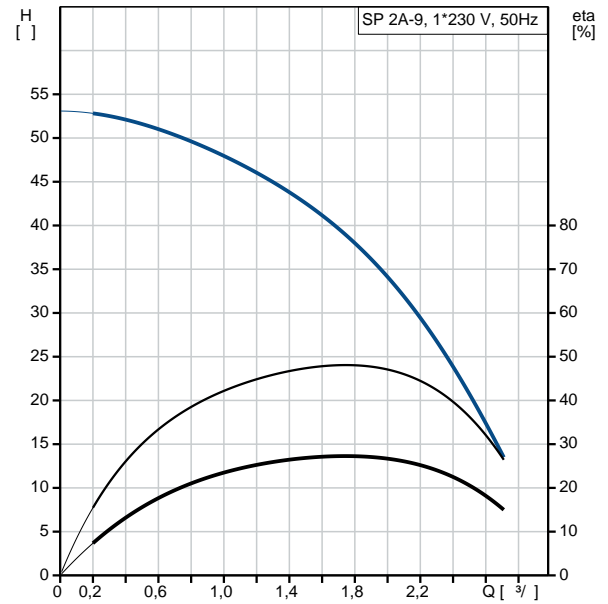

:	
MEI :	0.70
ErP :	EuP / .
:	10.6
:	11.9
:	11.5 ³
Swedish RSK No.:	5852696
Norwegian NRF no.:	9040642
C :	DK
:	8413702900

09002B09 SP 2A-9 50

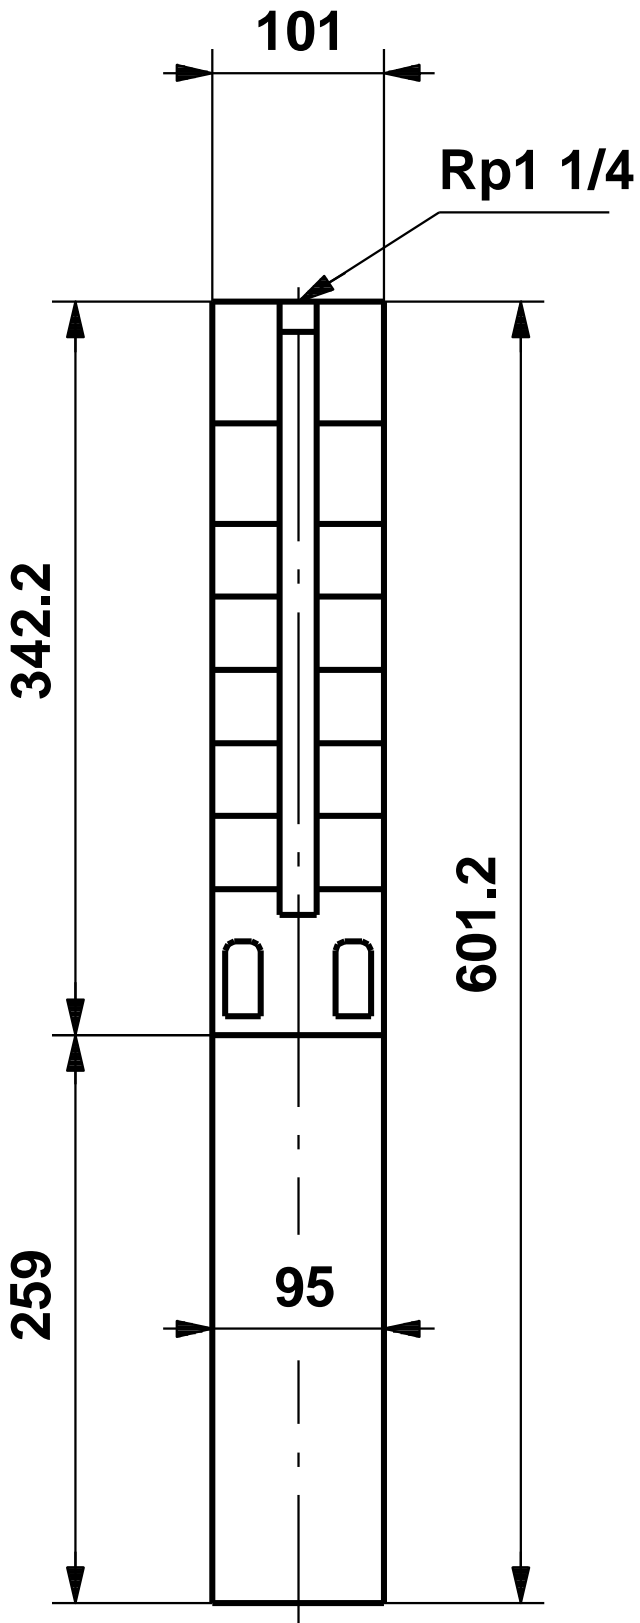

09002B09 SP 2A-9 50

