

1 SP 2A-18



: 09002B18

, EN 1.4301 (AISI 304),

MS4020.75

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 2 ³/₇₂
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE



EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch
 MS402
 CSIR
 - P2: 0.75
 (2), : 0.75
 50 Hz
 1 x 230
 7.45 A
 390 %
 Cos - : 0.79
 2860 /
 (IEC 34-5): IP68
 (IEC 85): B
 79213104
 MEI : 0.70
 ErP : EuP /
 14.5
 16.3
 16.3³
 Swedish RSK No.: 5852698
 Norwegian NRF no.: 9040644
 C : DK
 8413702900

09002B18 SP 2A-18 50

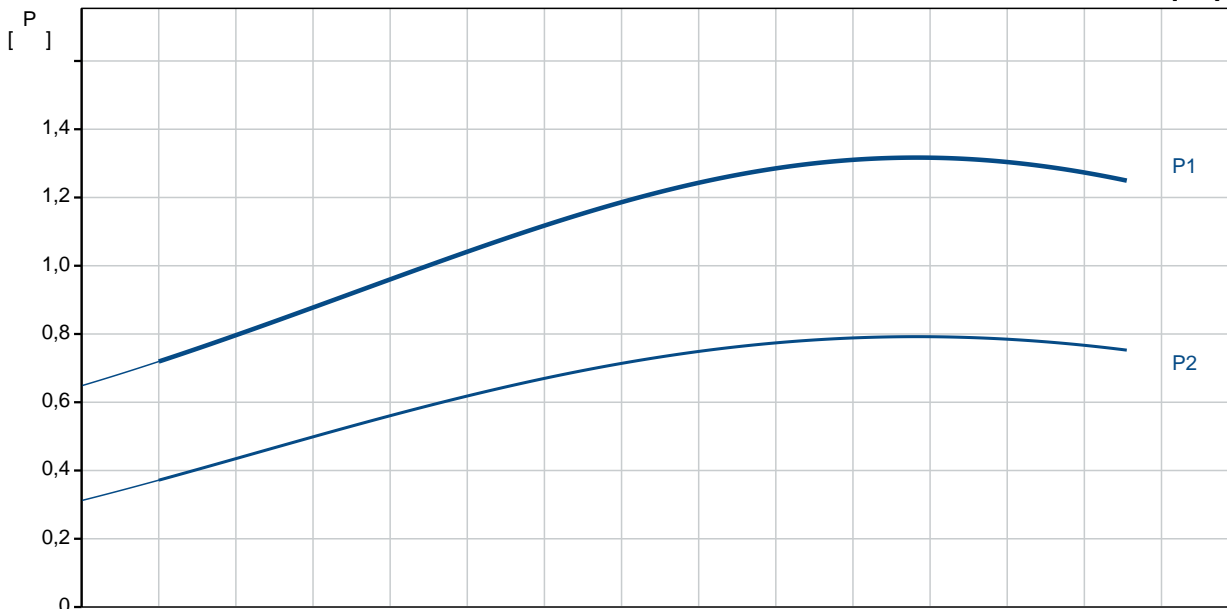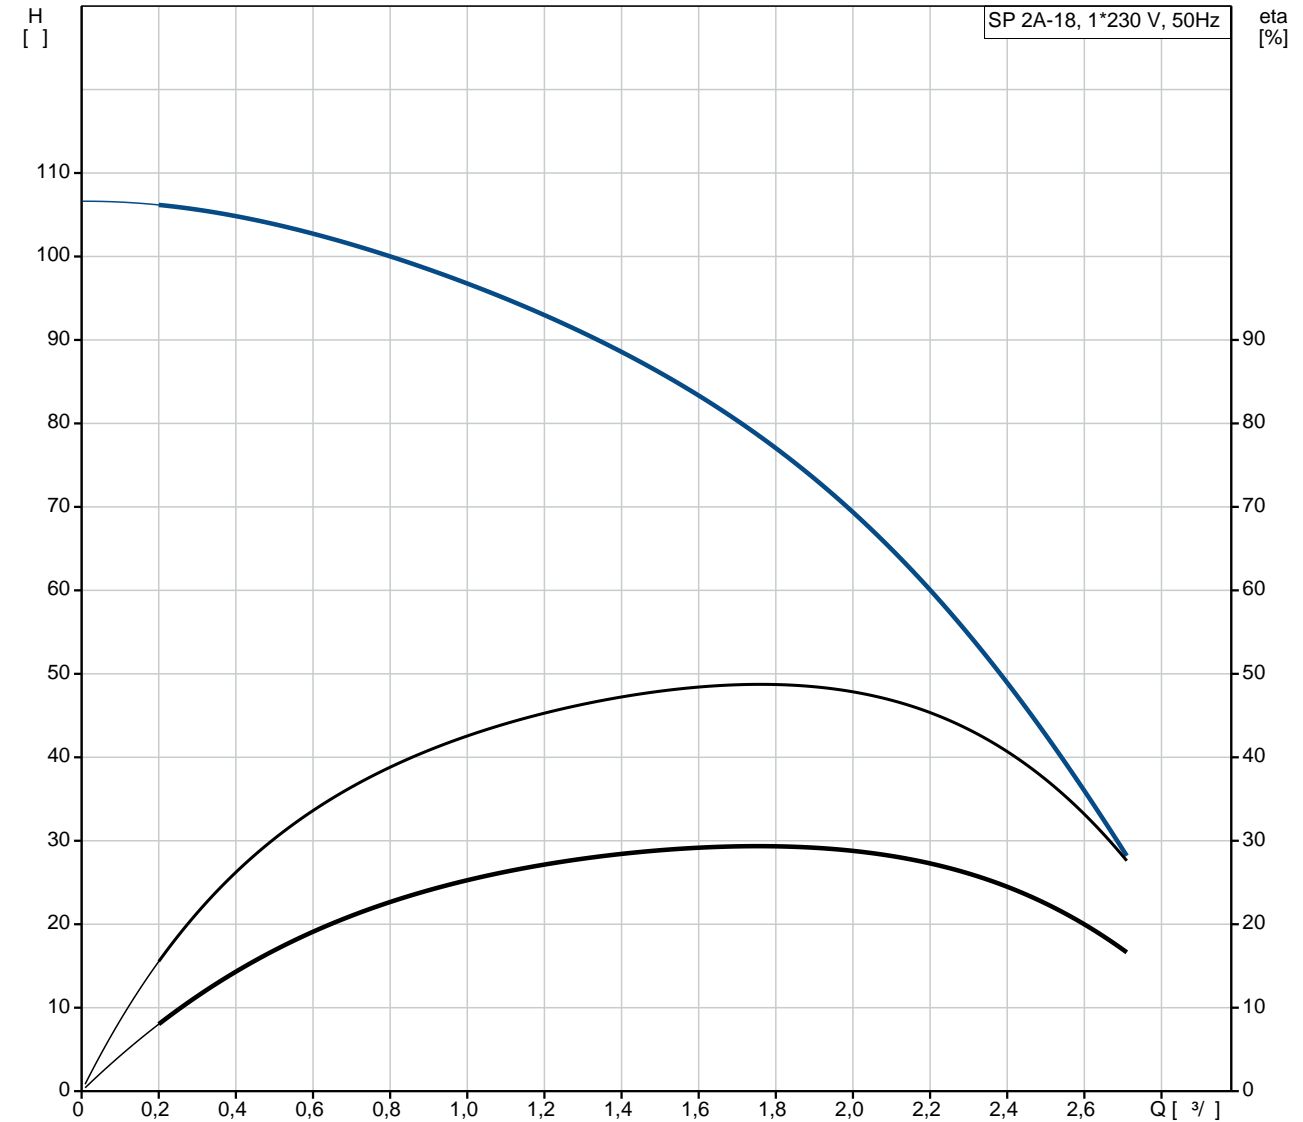


	SP 2A-18
	09002B18
EAN	5700391121838
	2900 /
	2 3/
	72
	18
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	CSIR
	GRUNDFOS
- P2:	0.75
(2),	0.75
	50 Hz
	1 x 230
	7.45 A
	390 %
Cos -	0.79
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	CONTACT
	79213104

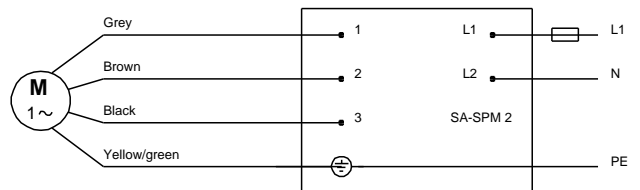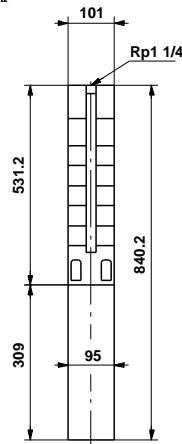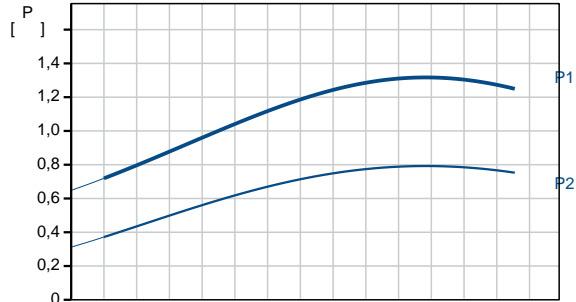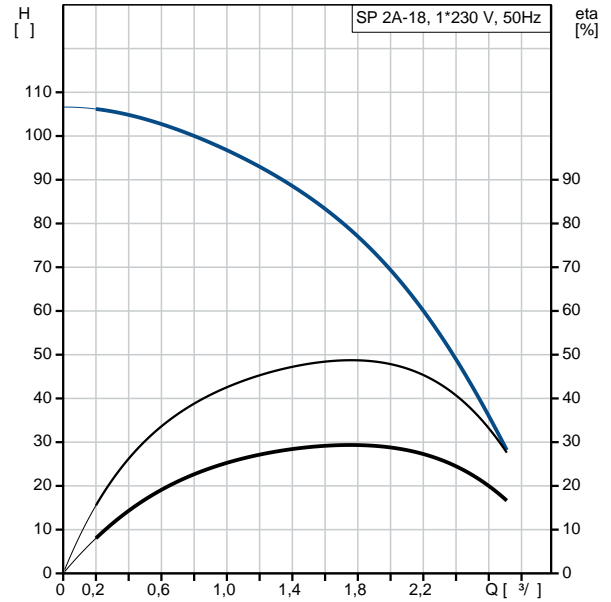

:	
MEI :	0.70
ErP :	EuP / .
:	14.5
:	16.3
:	16.3 ³
Swedish RSK No.:	5852698
Norwegian NRF no.:	9040644
C :	DK
:	8413702900

09002B18 SP 2A-18 50

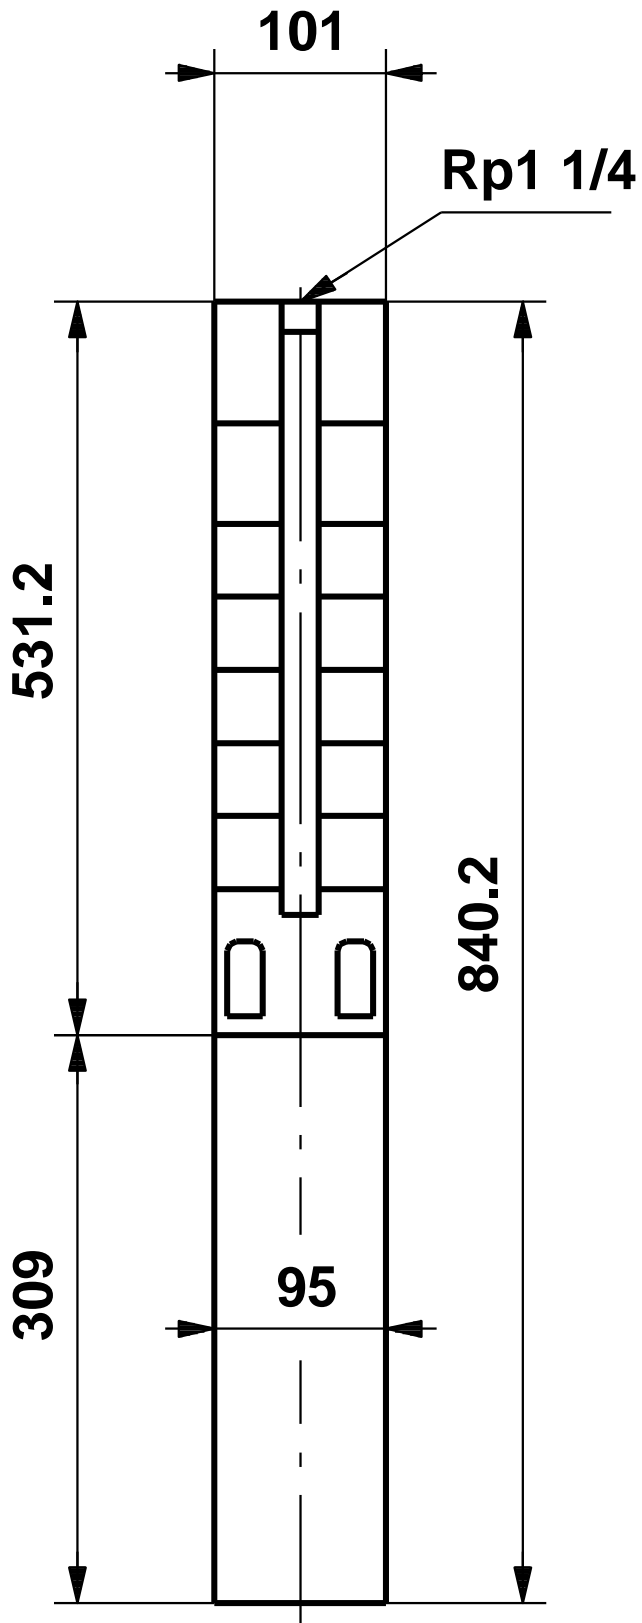

09002B18 SP 2A-18 50

