

1 SP 2A-28



: 09002B28

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 2 ³/_l
 : 111
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 1 x 230
 : 10.2 A
 : 460 %
 Cos - : 0.98
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213106
 :
 : MEI : 0.70
 ErP : EuP /
 : 18.8
 : 20.6
 : 21.7 ³
 C : DK
 : 8413702900

09002B28 SP 2A-28 50

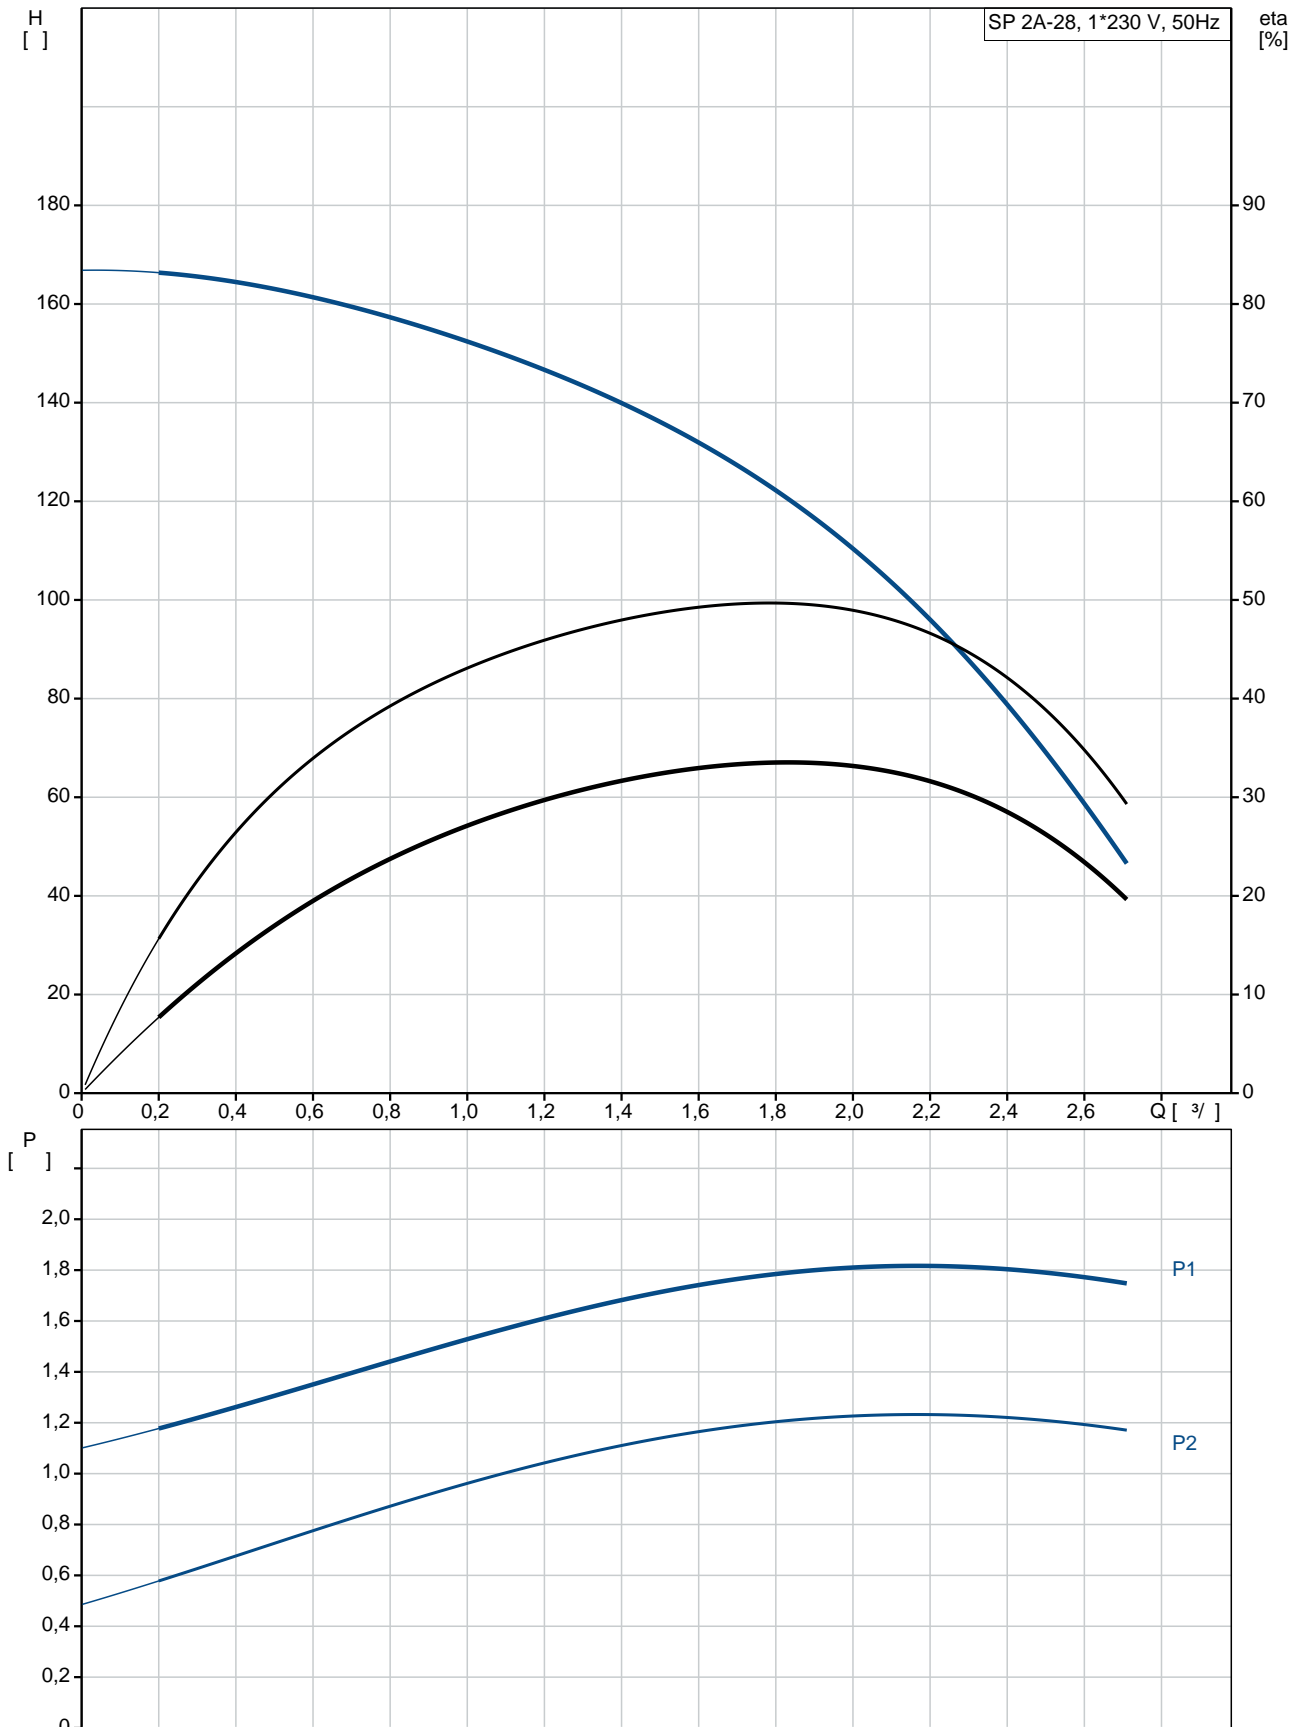


	SP 2A-28
	09002B28
EAN	5700391121951
	2900 /
	2 3/
	111
	28
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	CSCR
	GRUNDFOS
- P2:	1.5
(2),	1.5
	50 Hz
	1 x 230
	10.2 A
	460 %
Cos	0.98
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	79213106

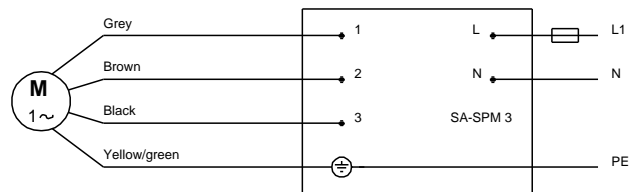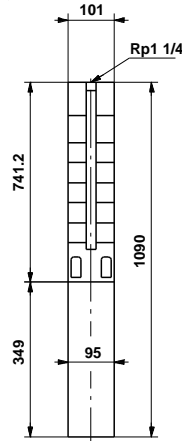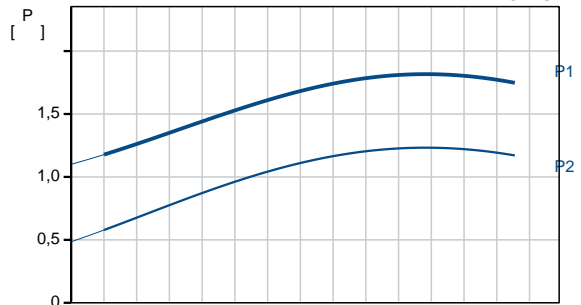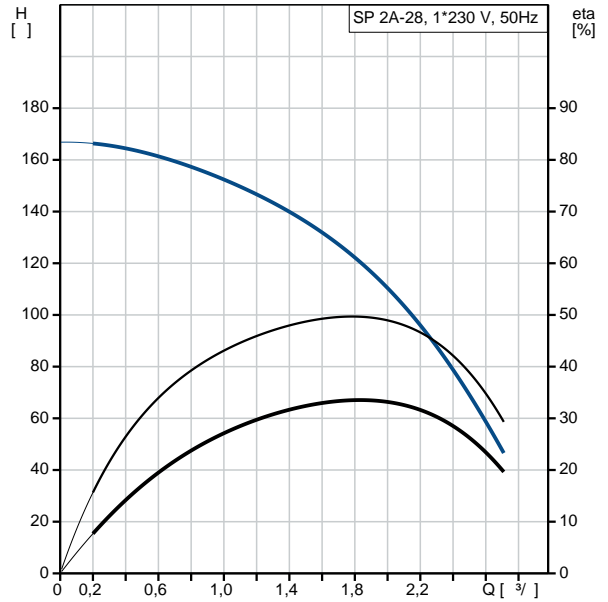

:	
MEI :	0.70
ErP :	EuP / .
:	18.8
:	20.6
:	21.7 ³
C :	DK
:	8413702900

09002B28 SP 2A-28 50

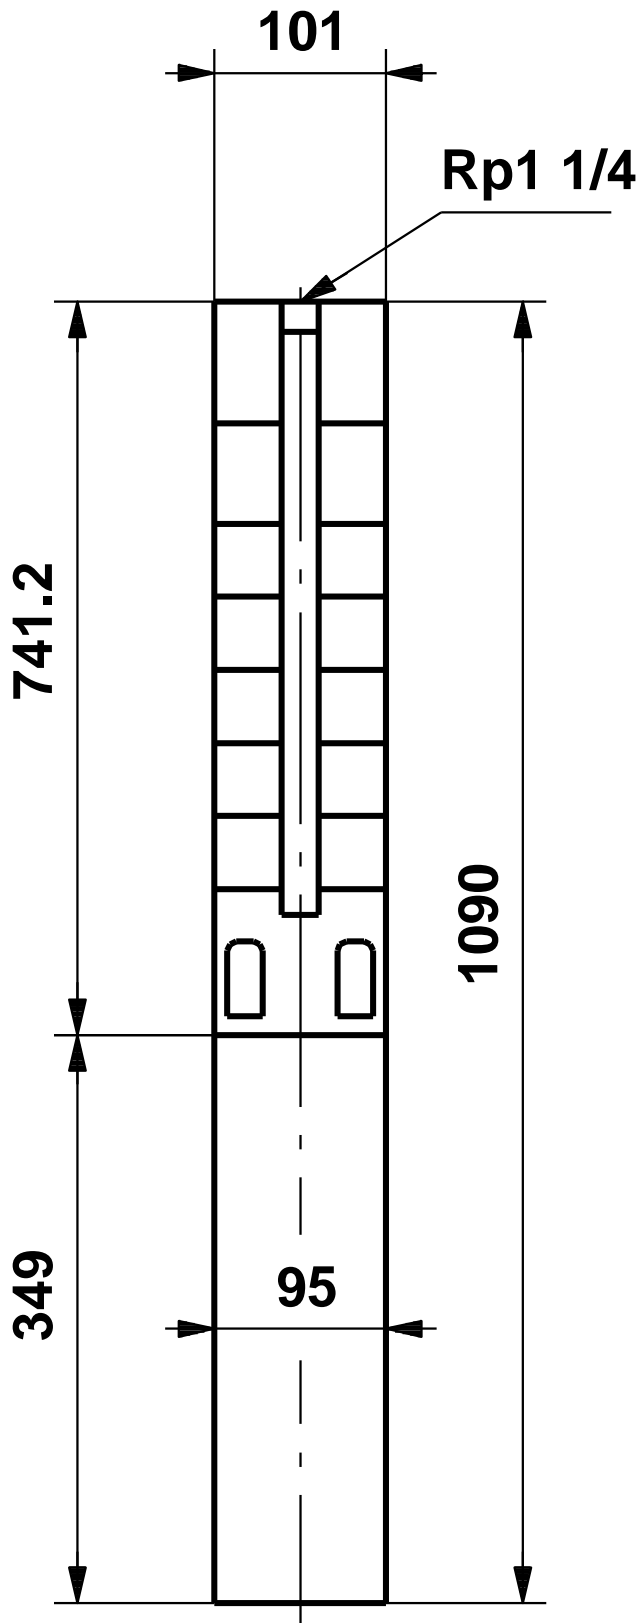

09002B28 SP 2A-28 50

