

1 SP 3A-18



: 10001K18

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

3 ³/
80

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE



EN 1.4301
AISI AISI 304

EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

: Rp1 1/4
 : 4 inch
 :
 : MS402
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 3 x 380-400-415
 : 3.25-3.40-3.65 A
 : 480-480-470 %
 Cos - : 0.76-0.72-0.65
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192005
 :
 MEI : 0.70
 ErP : EuP /
 : 14.8
 : 16.2
 : 16.3 ³
 Danish VVS No.: 388313180
 Swedish RSK No.: 5852981
 Finnish LVI No.: 4762654
 Norwegian NRF no.: 9040855
 C : DK
 : 8413702900

10001K18 SP 3A-18 50

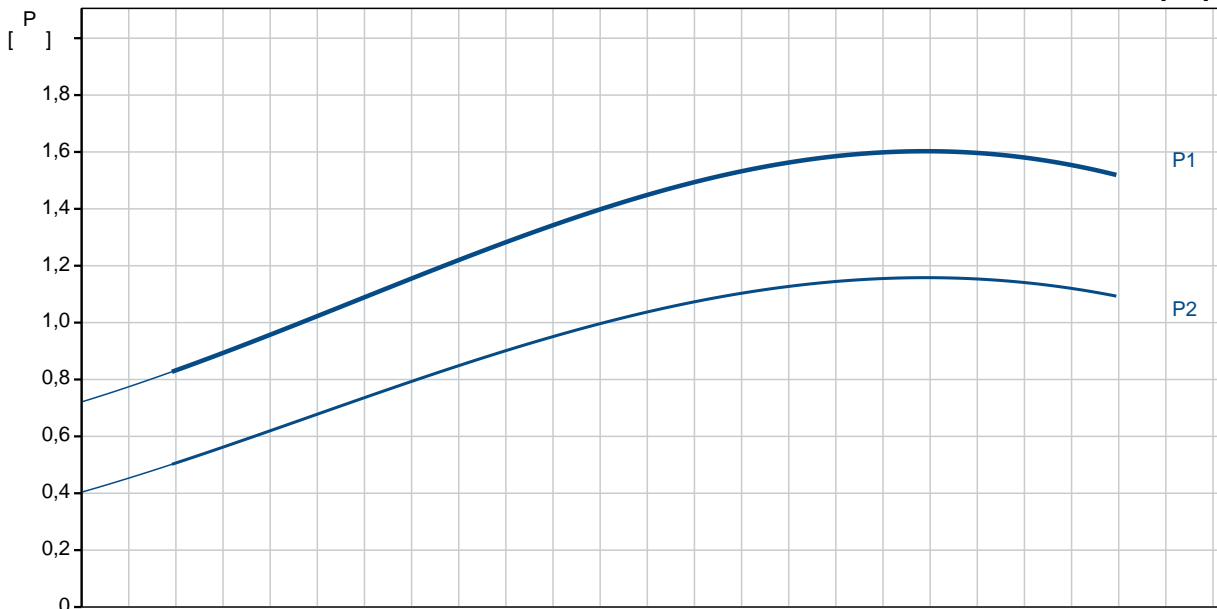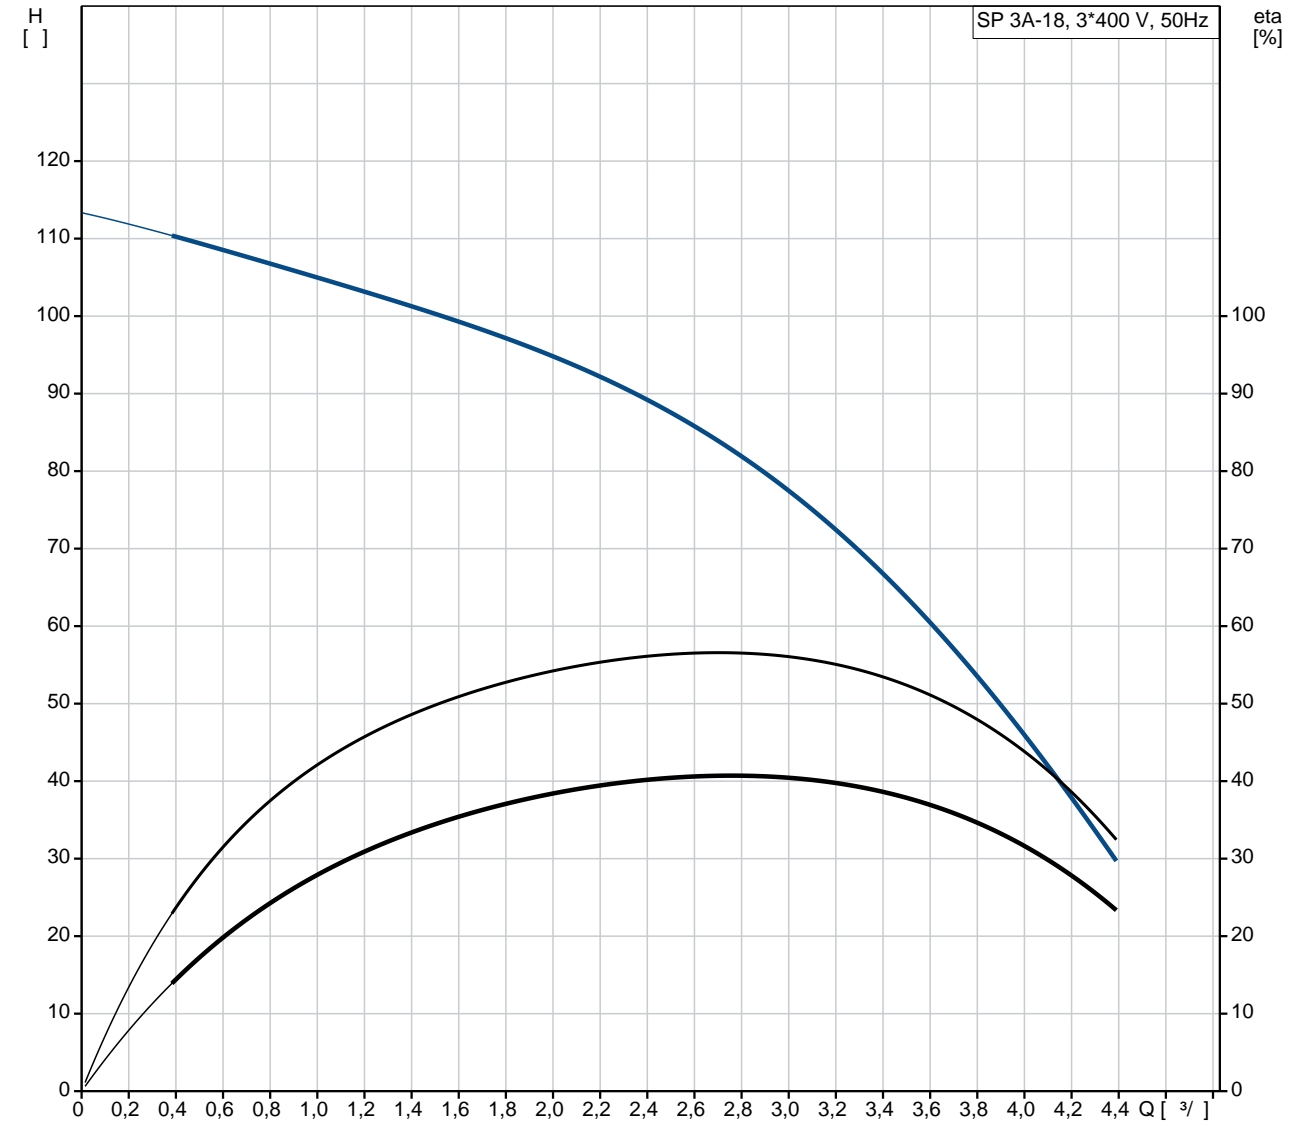

SP 3A-18
 10001K18
 EAN : 5708601051401
 2900 /
 3 3/
 80
 18
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

20 °C

998.2 / ³

MS402
 GRUNDFOS

- P2: 1.1

(2), 1.1

50 Hz
 3 x 380-400-415

3.25-3.40-3.65 A

480-480-470 %





Cos - : 0.76-0.72-0.65

2850-2860-2870 /

(IEC 34-5): IP68


(IEC 85): B

79192005

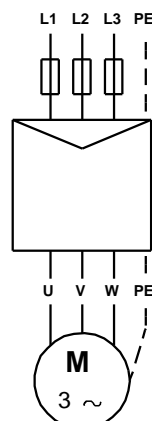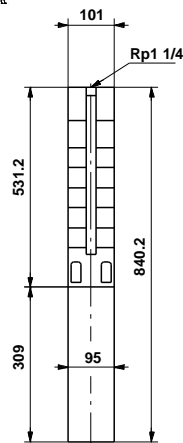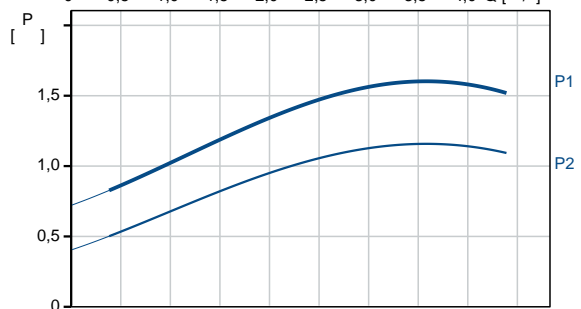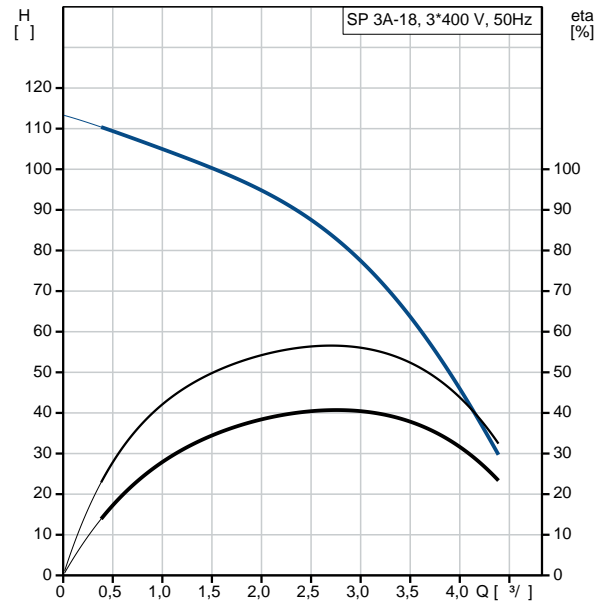

MEI :		0.70
ErP :	EuP	/ .
:		14.8
:		16.2
:		16.3 ³
Danish VVS No.:		388313180
Swedish RSK No.:		5852981
Finnish LVI No.:		4762654
Norwegian NRF no.:		9040855
C :	DK	
:		8413702900

10001K18 SP 3A-18 50

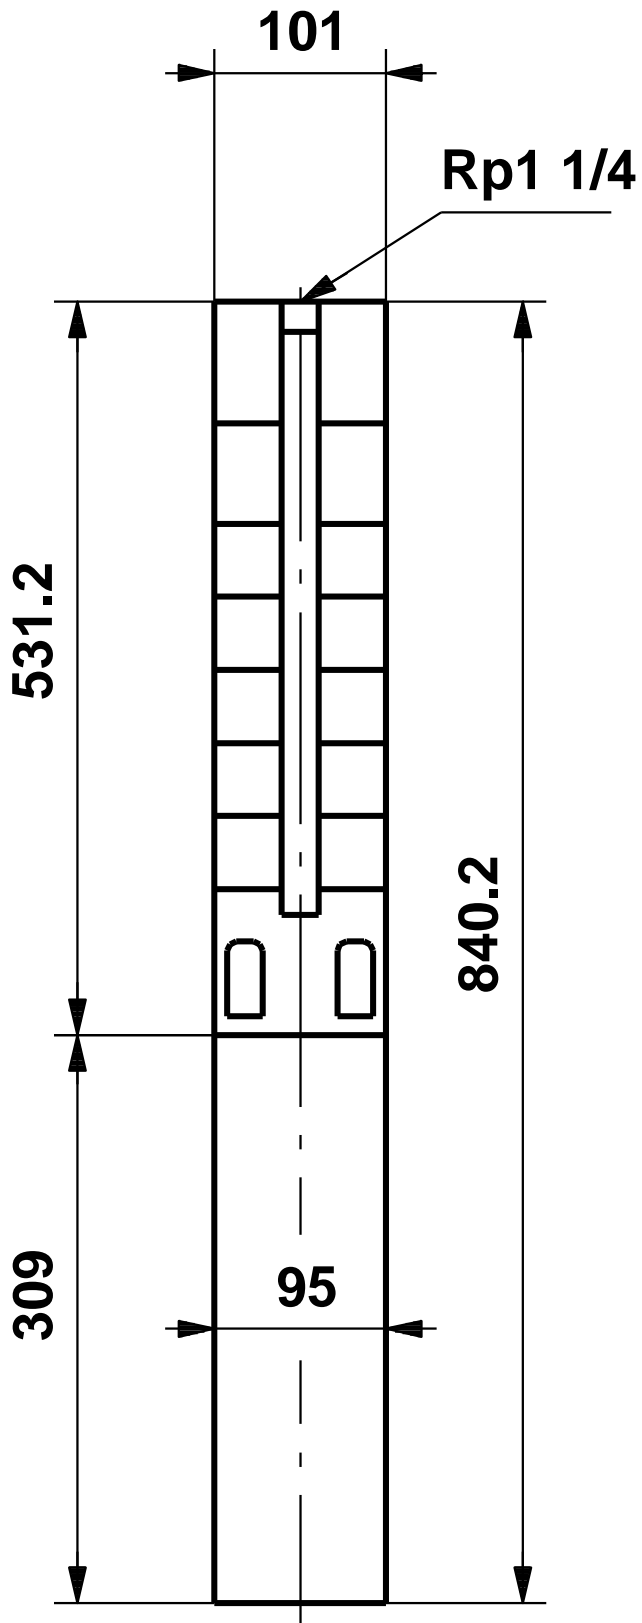

10001K18 SP 3A-18 50

