

1 SP 3A-22



: 10001K22

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C  
998.2 / <sup>3</sup>

: 2900 /

3 <sup>3</sup>/  
98

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE



EN 1.4301  
AISI AISI 304

EN 1.4301  
AISI AISI 304





DIN W.-Nr. 1.4301  
AISI 304

:  
 : Rp1 1/4  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 4.10-4.20-4.40 A  
 : 490-500-500 %  
 Cos - : 0.80-0.75-0.70  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192006  
 :  
 MEI : 0.70  
 ErP : EuP /  
 : 17.6  
 : 19  
 : 16.3 <sup>3</sup>  
 Danish VVS No.: 388313220  
 Swedish RSK No.: 5852982  
 Finnish LVI No.: 4762655  
 Norwegian NRF no.: 9040856  
 C : DK  
 : 8413702900

## 10001K22 SP 3A-22 50

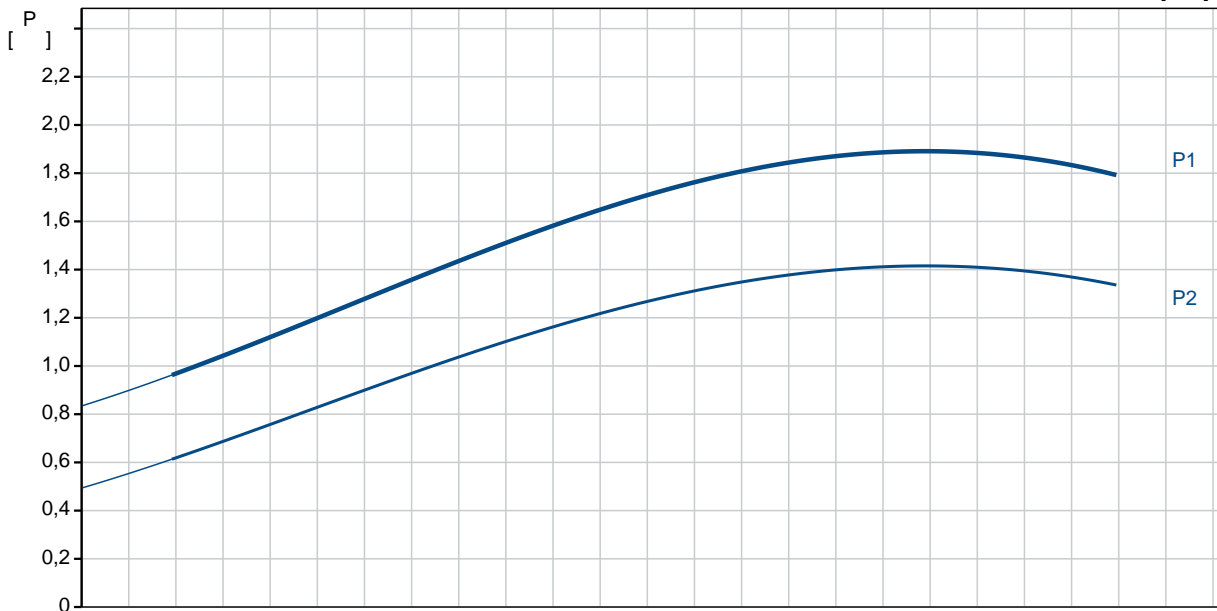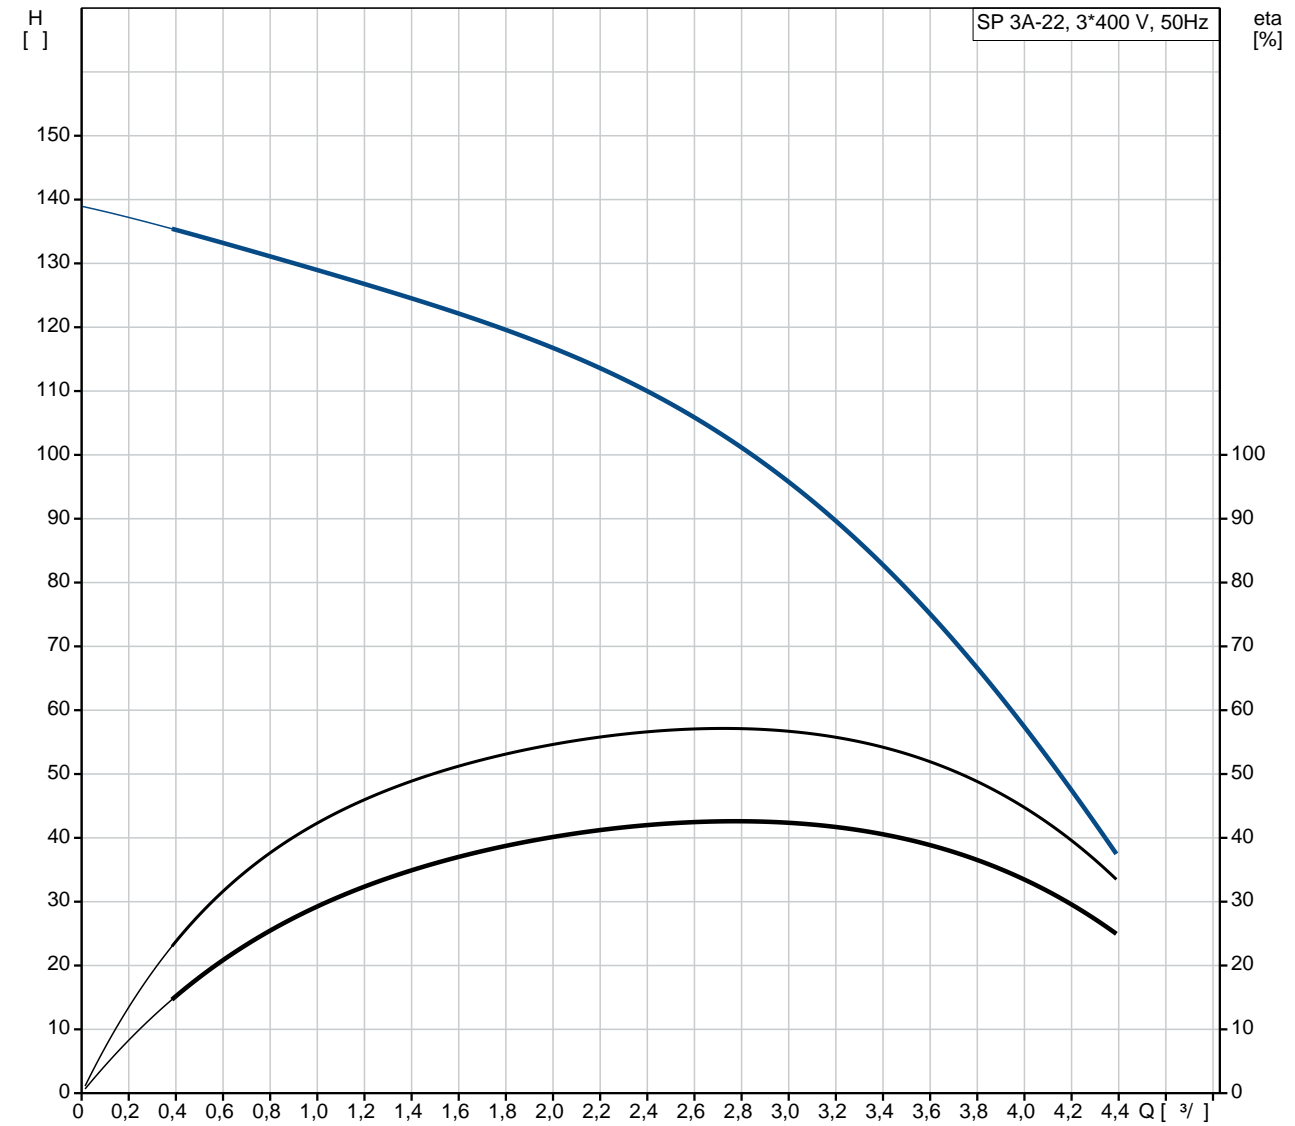


	SP 3A-22
	10001K22
EAN	5708601051418
	2900 /
	3 3/4
	98
	22
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
...t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	GRUNDFOS
- P2:	1.5
( 2),	1.5
	50 Hz
	3 x 380-400-415
	4.10-4.20-4.40 A
	490-500-500 %
Cos	0.80-0.75-0.70
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192006

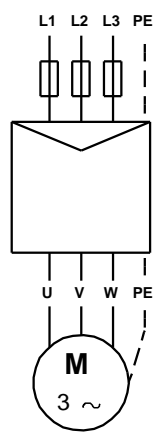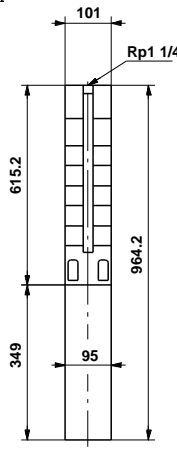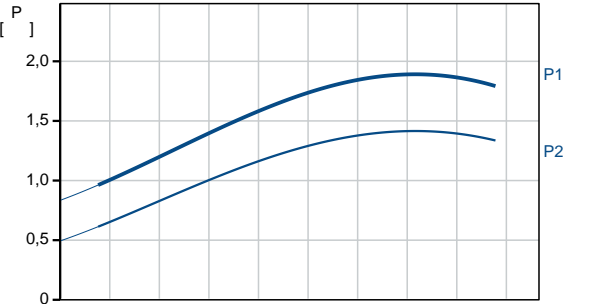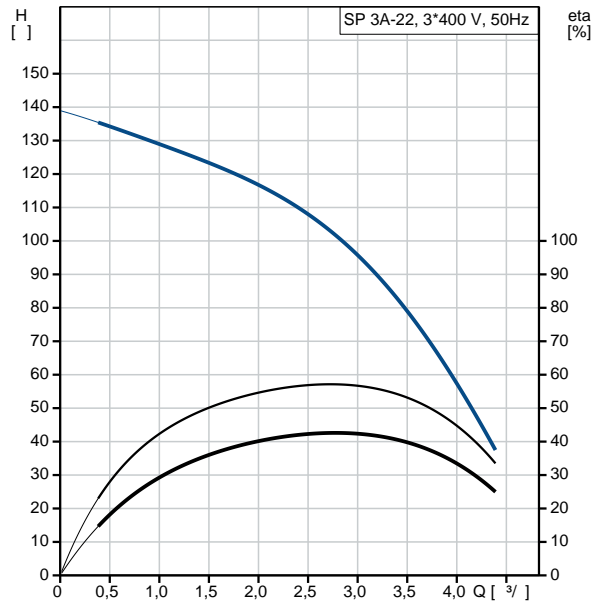


MEI :		0.70
ErP :	EuP	/ .
:		17.6
:		19
:		16.3 <sup>3</sup>
Danish VVS No.:		388313220
Swedish RSK No.:		5852982
Finnish LVI No.:		4762655
Norwegian NRF no.:		9040856
C :	DK	
:		8413702900

**10001K22 SP 3A-22 50**

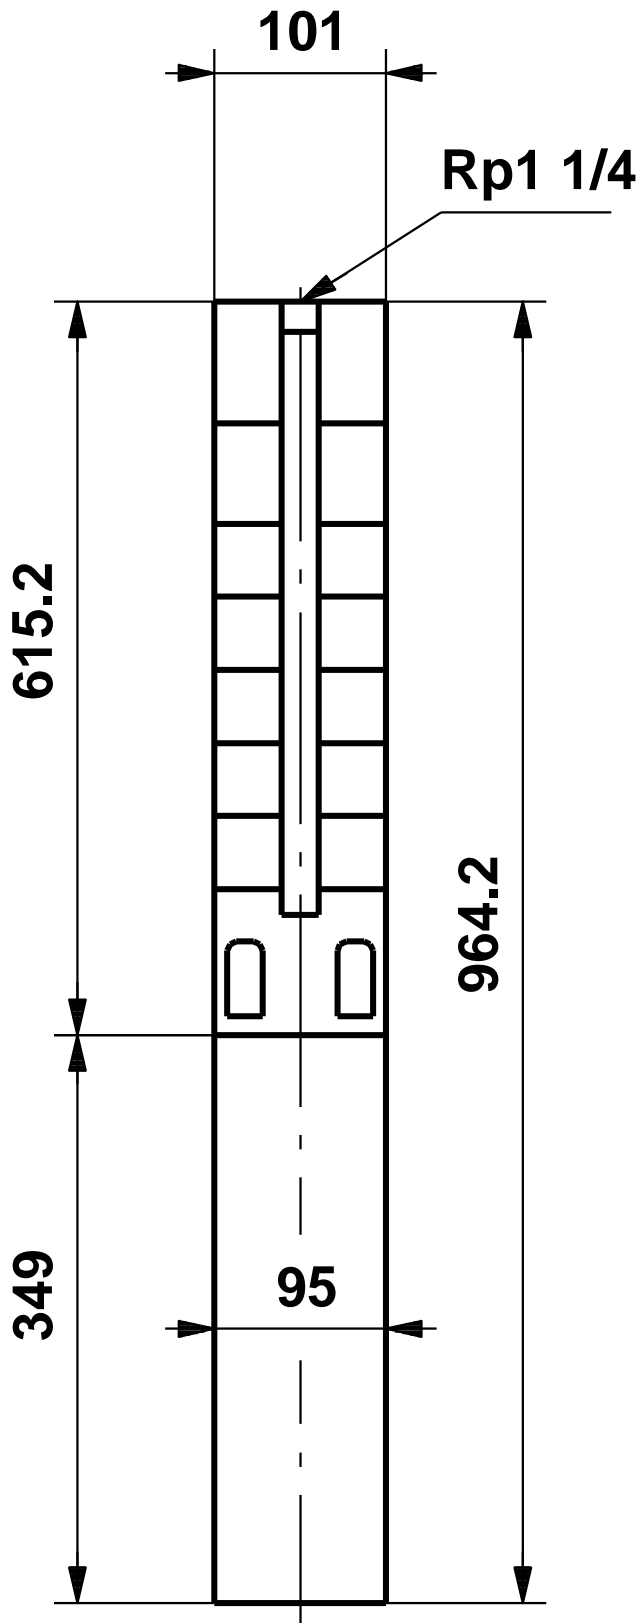

10001K22 SP 3A-22 50

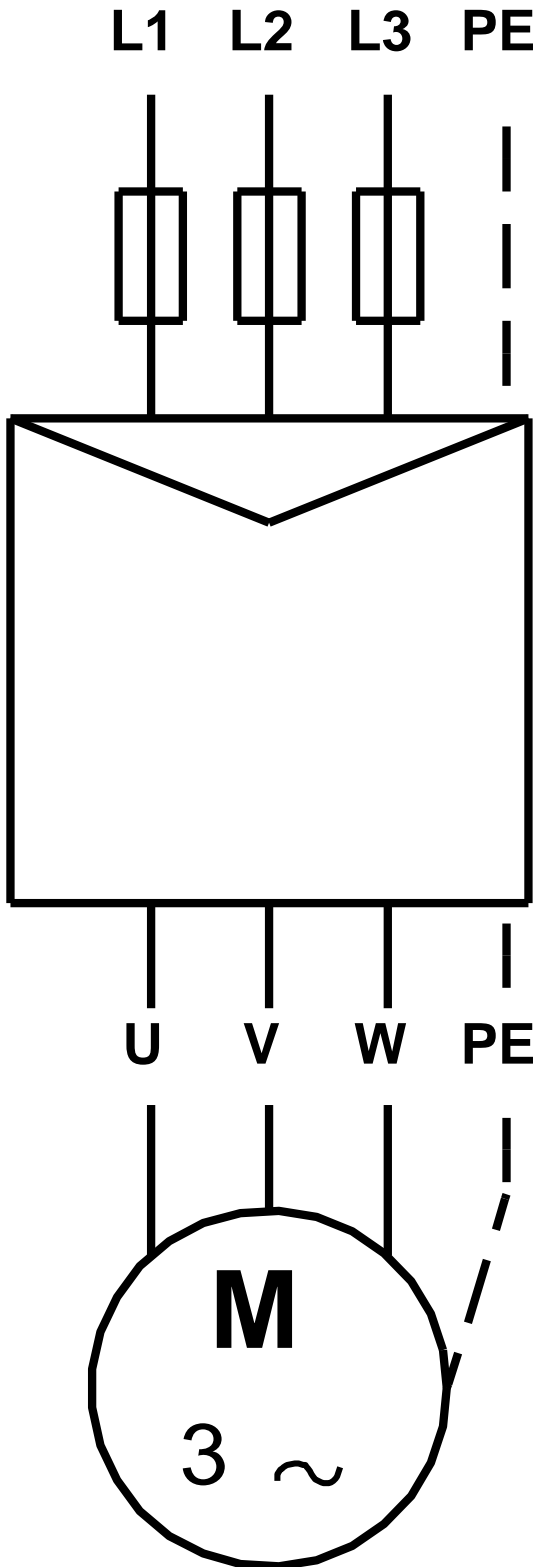

!

[ ],