

1 SP 3A-29



: 10001K29

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 998.2 / ³ : 20 °C

: 2900 /

: 3 ³/

: 129

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE

EN 1.4301

AISI AISI 304

EN 1.4301


AISI AISI 304

DIN W.-Nr. 1.4301

AISI 304

: Rp1 1/4
 : 4 inch
 :
 : MS402
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.50-5.50-5.70 A
 : 440-460-470 %
 Cos - : 0.85-0.82-0.77
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192007
 :
 MEI : 0.70
 ErP : EuP /
 : 20.2
 : 22
 : 21.7 ³
 Danish VVS No.: 388313290
 Swedish RSK No.: 5852984
 Finnish LVI No.: 4762657
 Norwegian NRF no.: 9040858
 C : DK
 : 8413702900

10001K29 SP 3A-29 50

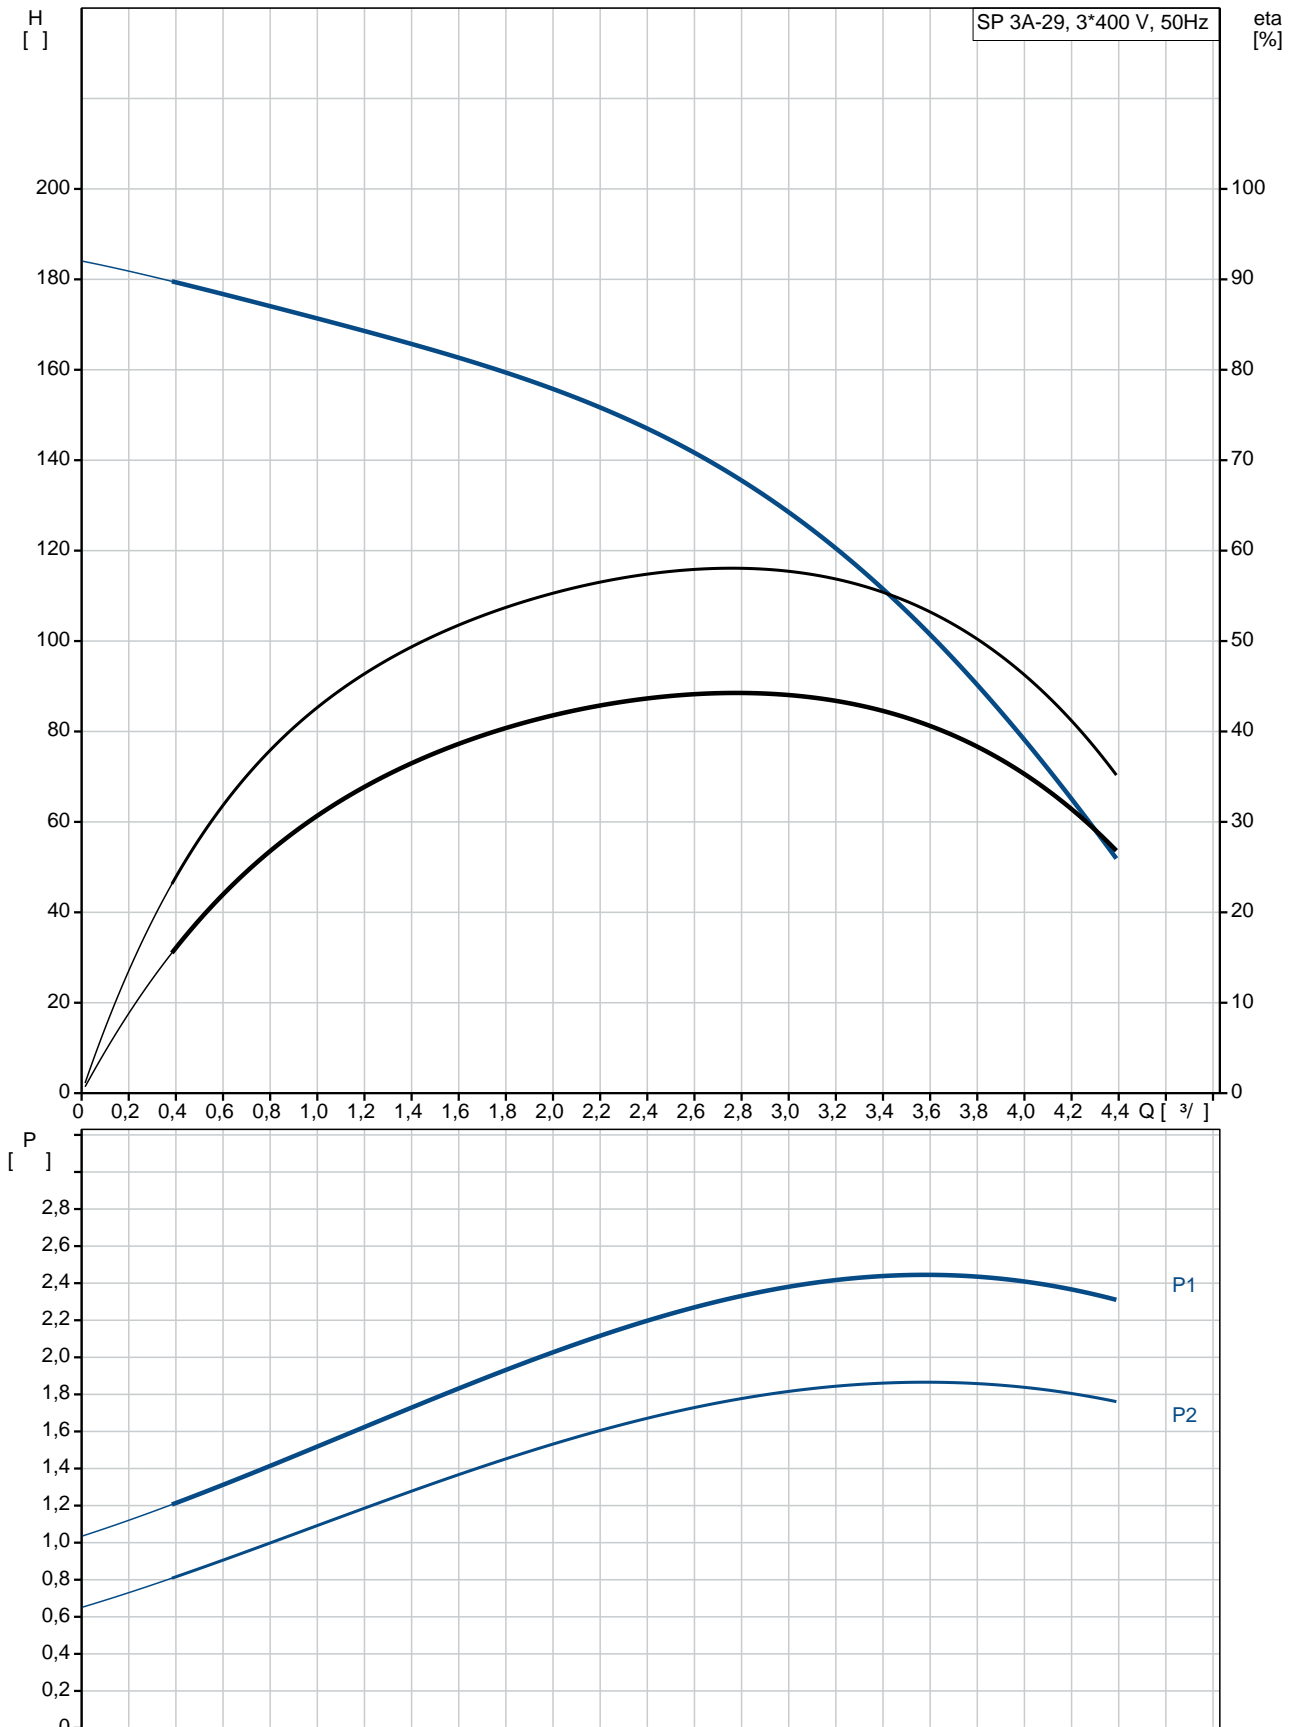

SP 3A-29
 EAN : 10001K29
 5708601059520

2900 /
 3 3/
 129
 29
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 GRUNDFOS
 - P2: 2.2
 (2), 2.2

50 Hz
 3 x 380-400-415
 5.50-5.50-5.70 A
 440-460-470 %
 Cos - : 0.85-0.82-0.77
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192007

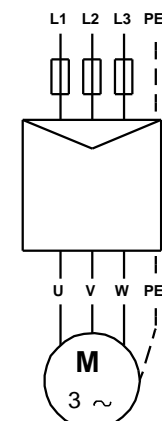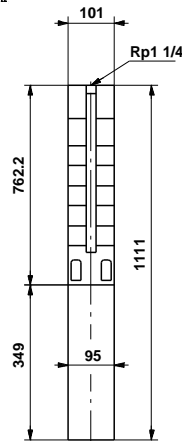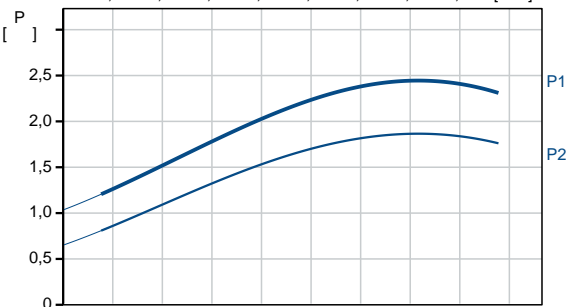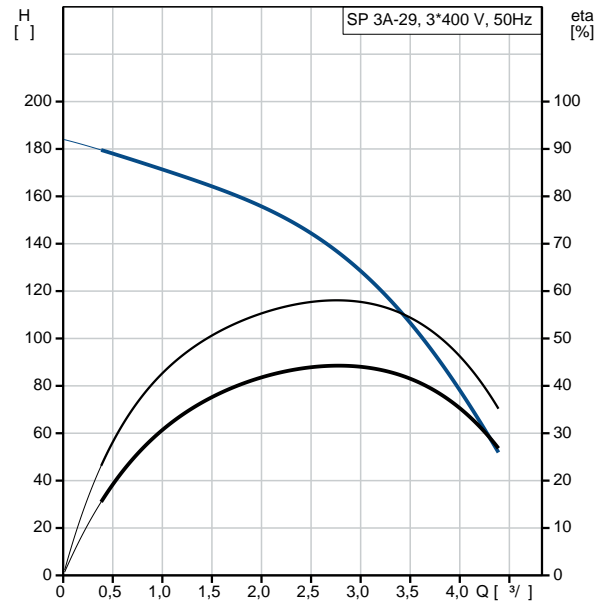

| | | |
|--------------------|-----|-------------------|
| MEI : | | 0.70 |
| ErP : | EuP | / . |
| : | | 20.2 |
| : | | 22 |
| : | | 21.7 ³ |
| Danish VVS No.: | | 388313290 |
| Swedish RSK No.: | | 5852984 |
| Finnish LVI No.: | | 4762657 |
| Norwegian NRF no.: | | 9040858 |
| C : | DK | |
| : | | 8413702900 |

10001K29 SP 3A-29 50

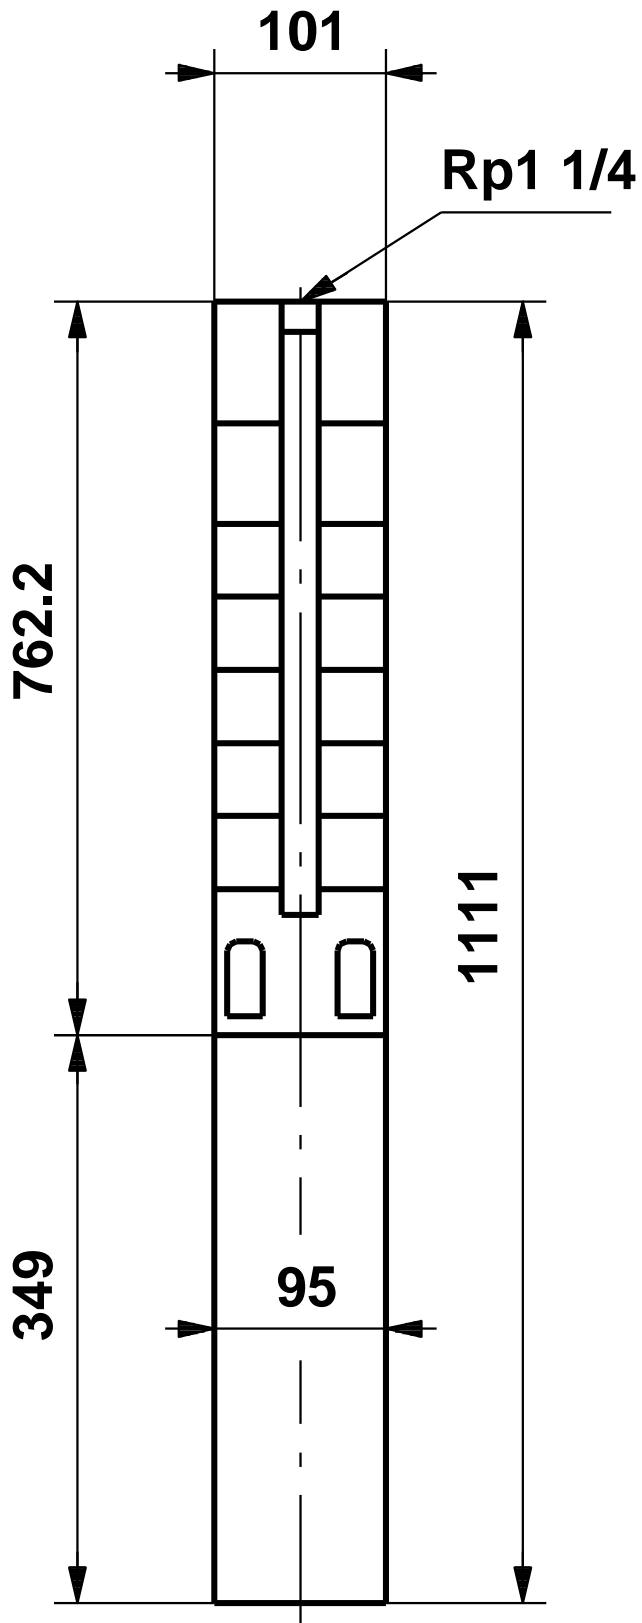

10001K29 SP 3A-29 50



! [], .