

1 SP 3A-33



: 10001K33

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

: 3 ³/

: 147

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE

EN 1.4301

AISI AISI 304

EN 1.4301



AISI AISI 304

DIN W.-Nr. 1.4301

AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.50-5.50-5.70 A
 : 440-460-470 %
 Cos - : 0.85-0.82-0.77
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192007
 :
 MEI : 0.70
 ErP : EuP /
 : 21
 : 22.8
 : 21.7 ³
 Danish VVS No.: 388313330
 Swedish RSK No.: 5852985
 Finnish LVI No.: 4762658
 Norwegian NRF no.: 9040859
 C : DK
 : 8413702900

10001K33 SP 3A-33 50

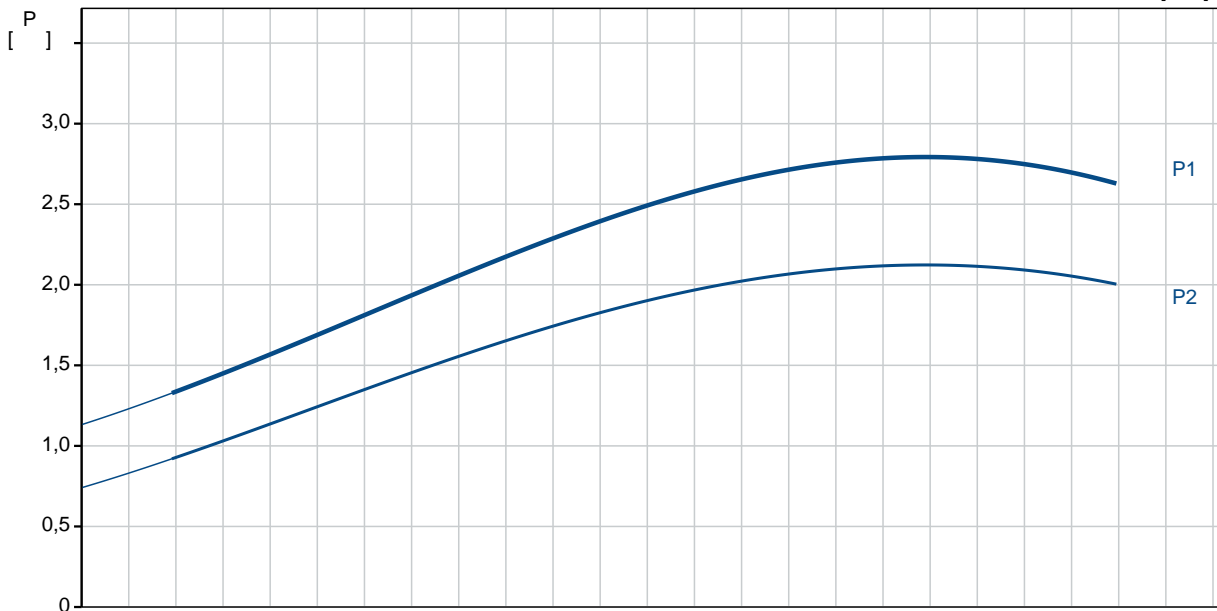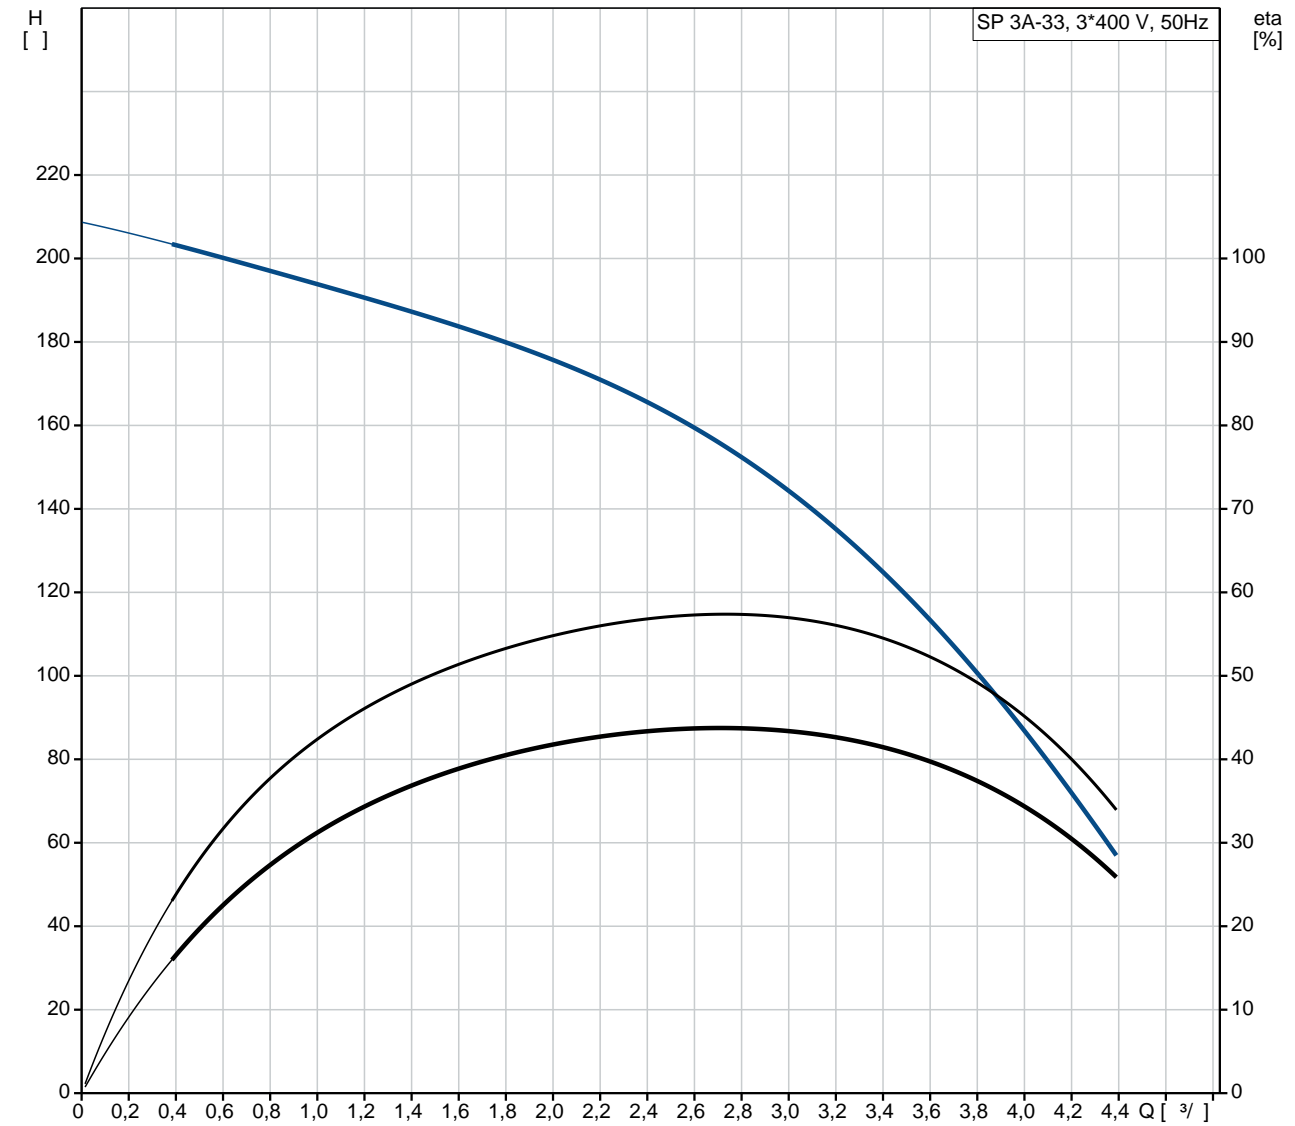

SP 3A-33
 10001K33
 EAN : 5708601059537

2900 /
 3 3/
 147
 33
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C

: 998.2 / ³

: MS402

: GRUNDFOS

- P2: 2.2

(2), 2.2

: 50 Hz

: 3 x 380-400-415

: 5.50-5.50-5.70 A

: 440-460-470 %





Cos - : 0.85-0.82-0.77

: 2850-2860-2870 /

(IEC 34-5): IP68


(IEC 85): B

: 79192007

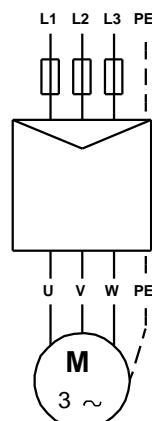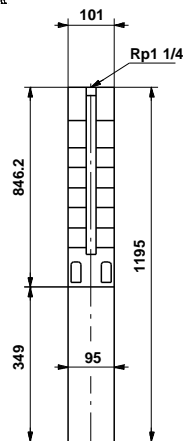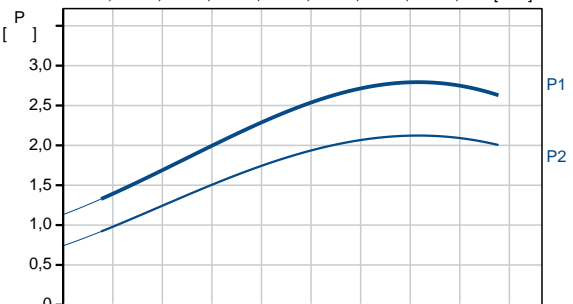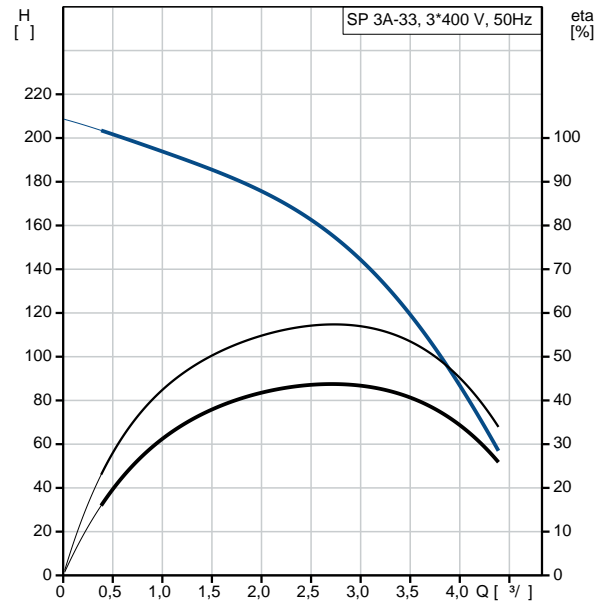

MEI :		0.70
ErP :	EuP	/ .
:		21
:		22.8
:		21.7 ³
Danish VVS No.:		388313330
Swedish RSK No.:		5852985
Finnish LVI No.:		4762658
Norwegian NRF no.:		9040859
C :	DK	
:		8413702900

10001K33 SP 3A-33 50

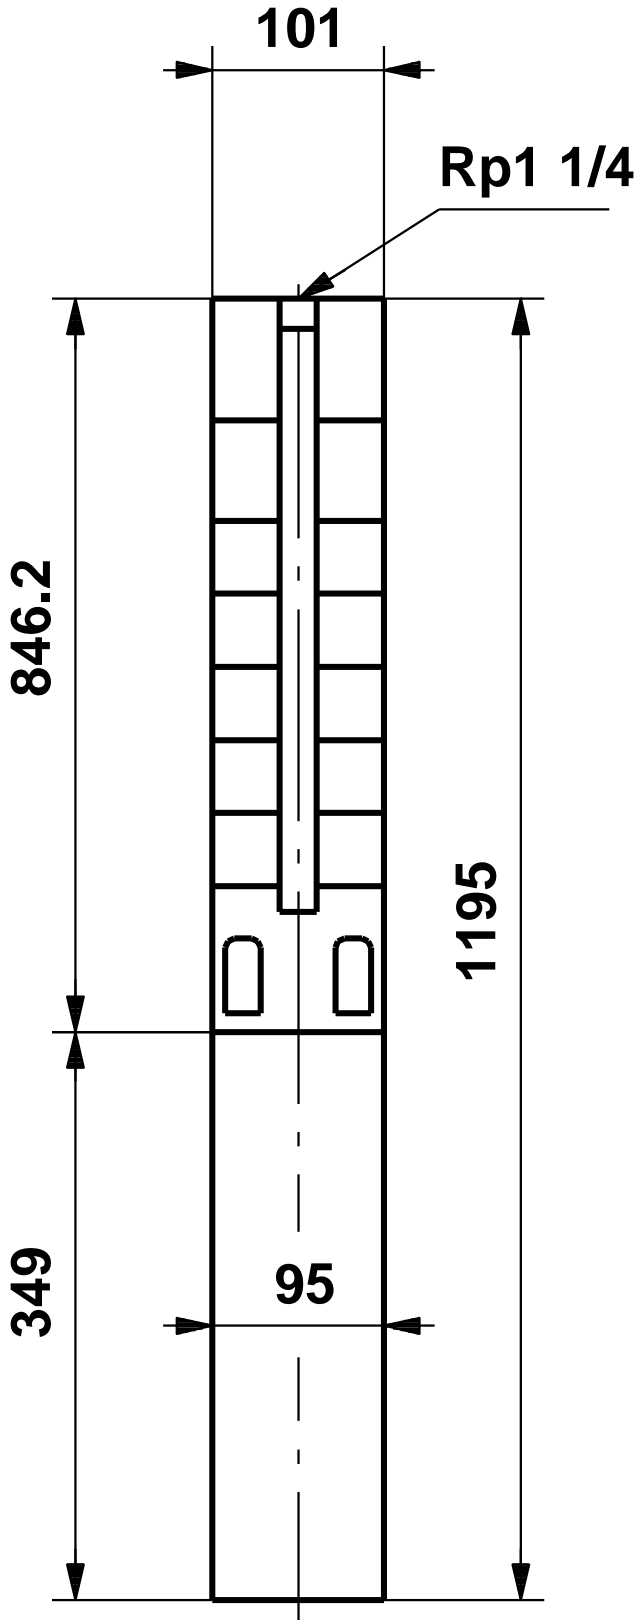

10001K33 SP 3A-33 50



! [], .