

1 SP 3A-18



: 10002B18

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 3 ³/
 80
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE



EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304





DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 1 x 230
 : 7.3 A
 : 480 %
 Cos - : 0.99
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213105
 :
 : MEI : 0.70
 ErP : EuP /
 : 16.2
 : 18
 : 16.3 ³
 C : DK
 : 8413702900

10002B18 SP 3A-18 50

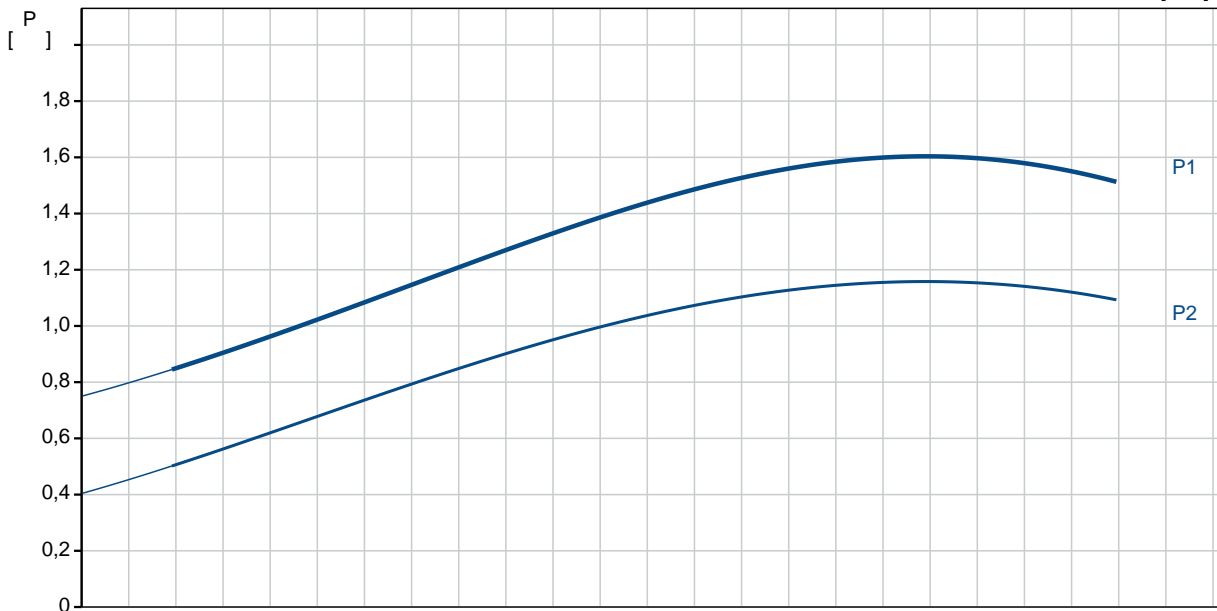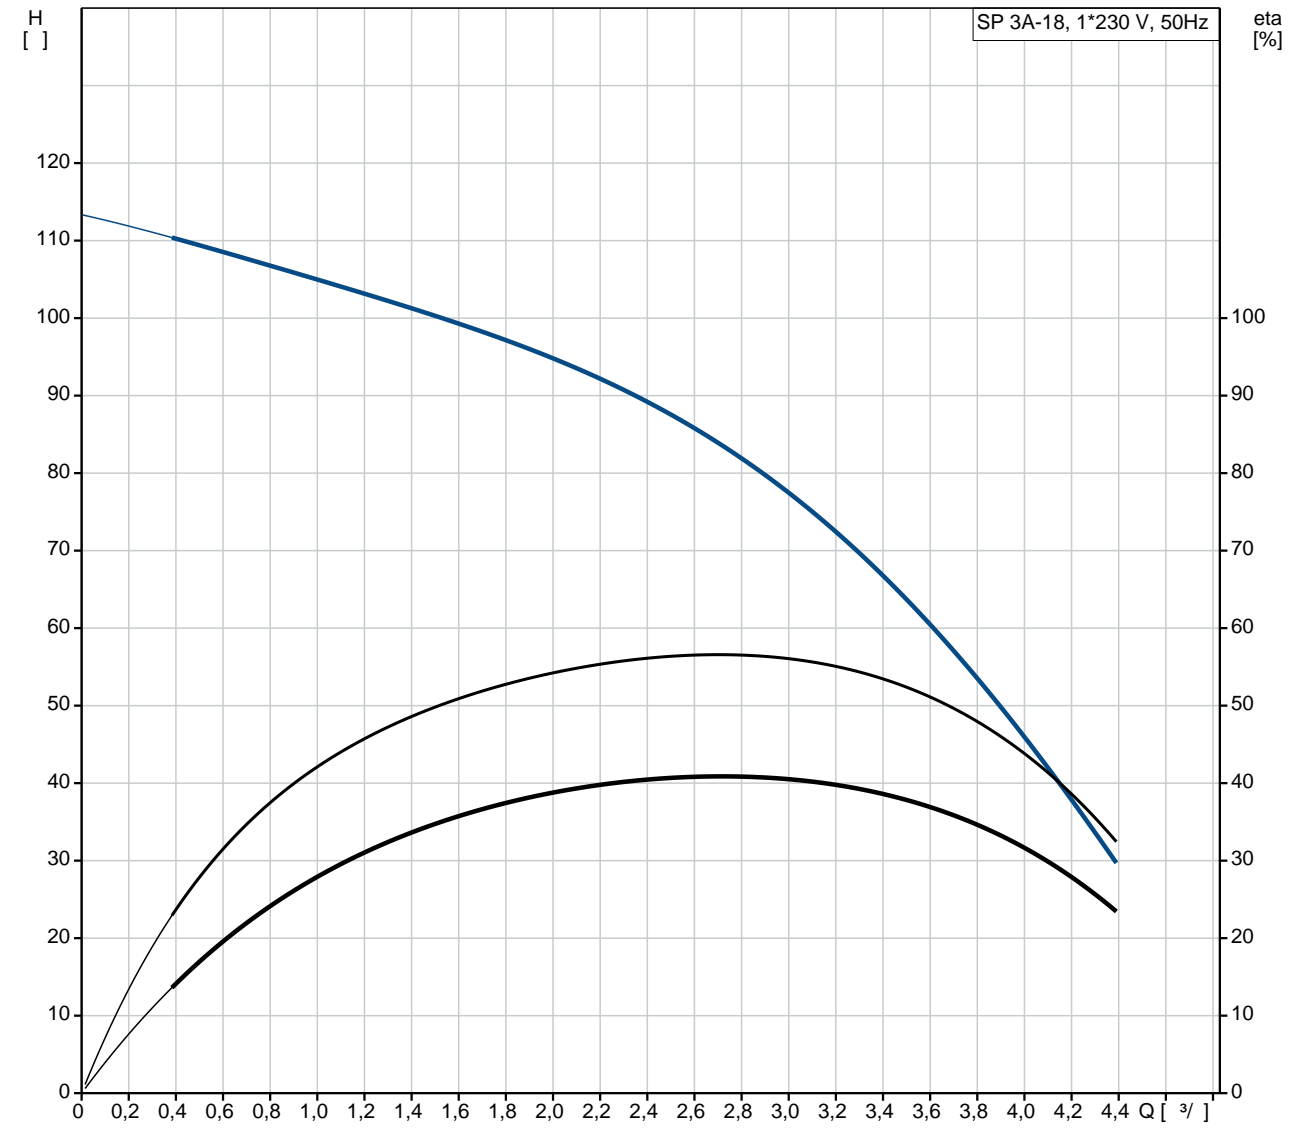


	SP 3A-18
	10002B18
EAN	5700391124457
	2900 /
	3 3/
	80
	18
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	SPLINE
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	Rp1 1/4
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / 3
	MS402
	CSCR
	GRUNDFOS
- P2:	1.1
(2),	1.1
	50 Hz
	1 x 230
	7.3 A
	480 %
Cos	0.99
	2860 /
(IEC 34-5):	IP68
(IEC 85):	B
	CONTACT
	79213105

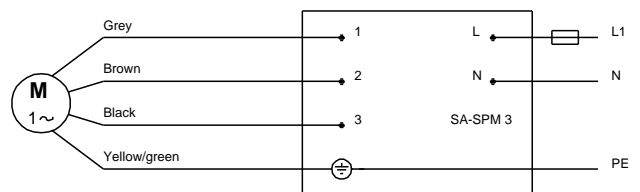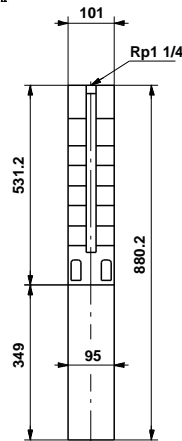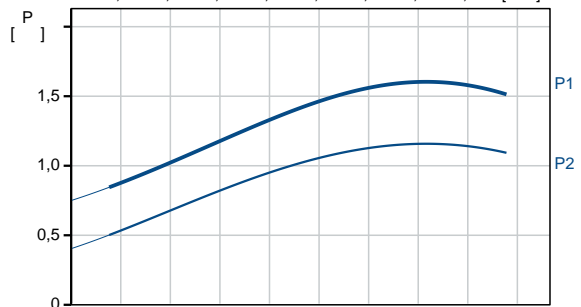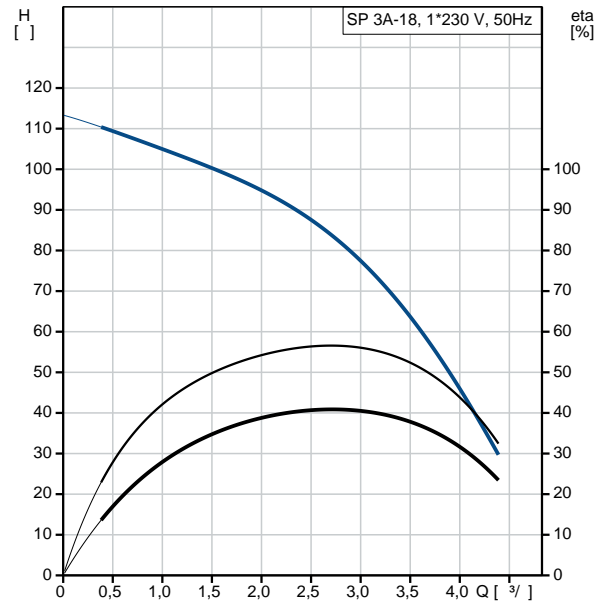

:	
MEI :	0.70
ErP :	EuP / .
:	16.2
:	18
:	16.3 ³
C :	DK
:	8413702900

10002B18 SP 3A-18 50

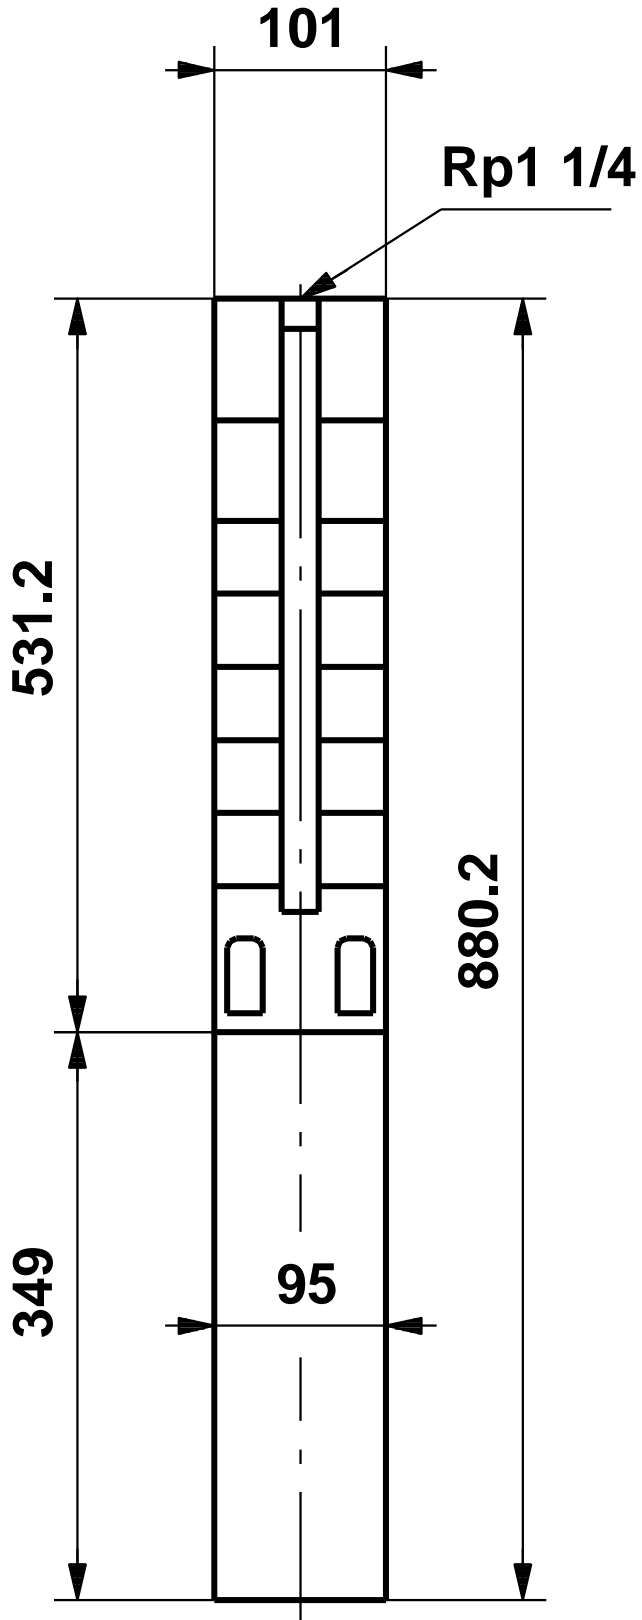

10002B18 SP 3A-18 50

