

1 SP 3A-22



: 10002B22

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

: 20 °C
998.2 / ³

: 2900 /

3 ³/
98

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

: SPLINE



EN 1.4301
AISI AISI 304

EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

: Rp1 1/4
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 1 x 230
 : 10.2 A
 : 460 %
 Cos - : 0.98
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213106
 :
 ErP : MEI : 0.70
 : EuP /
 : 17.5
 : 19.3
 : 21.7 ³
 C : DK
 : 8413702900

10002B22 SP 3A-22 50

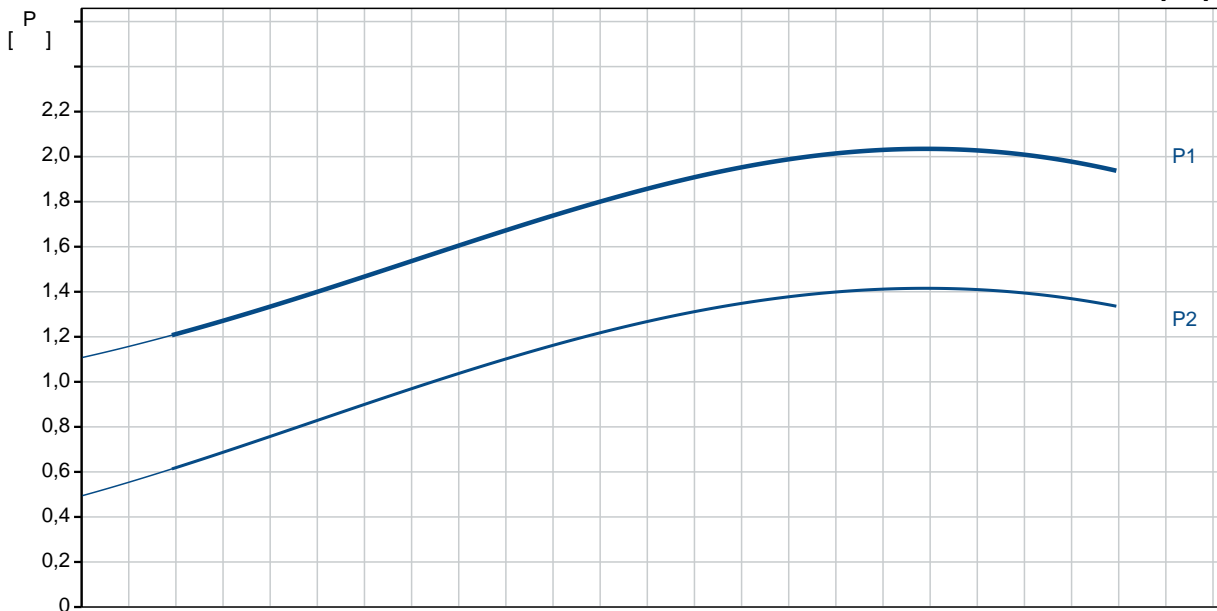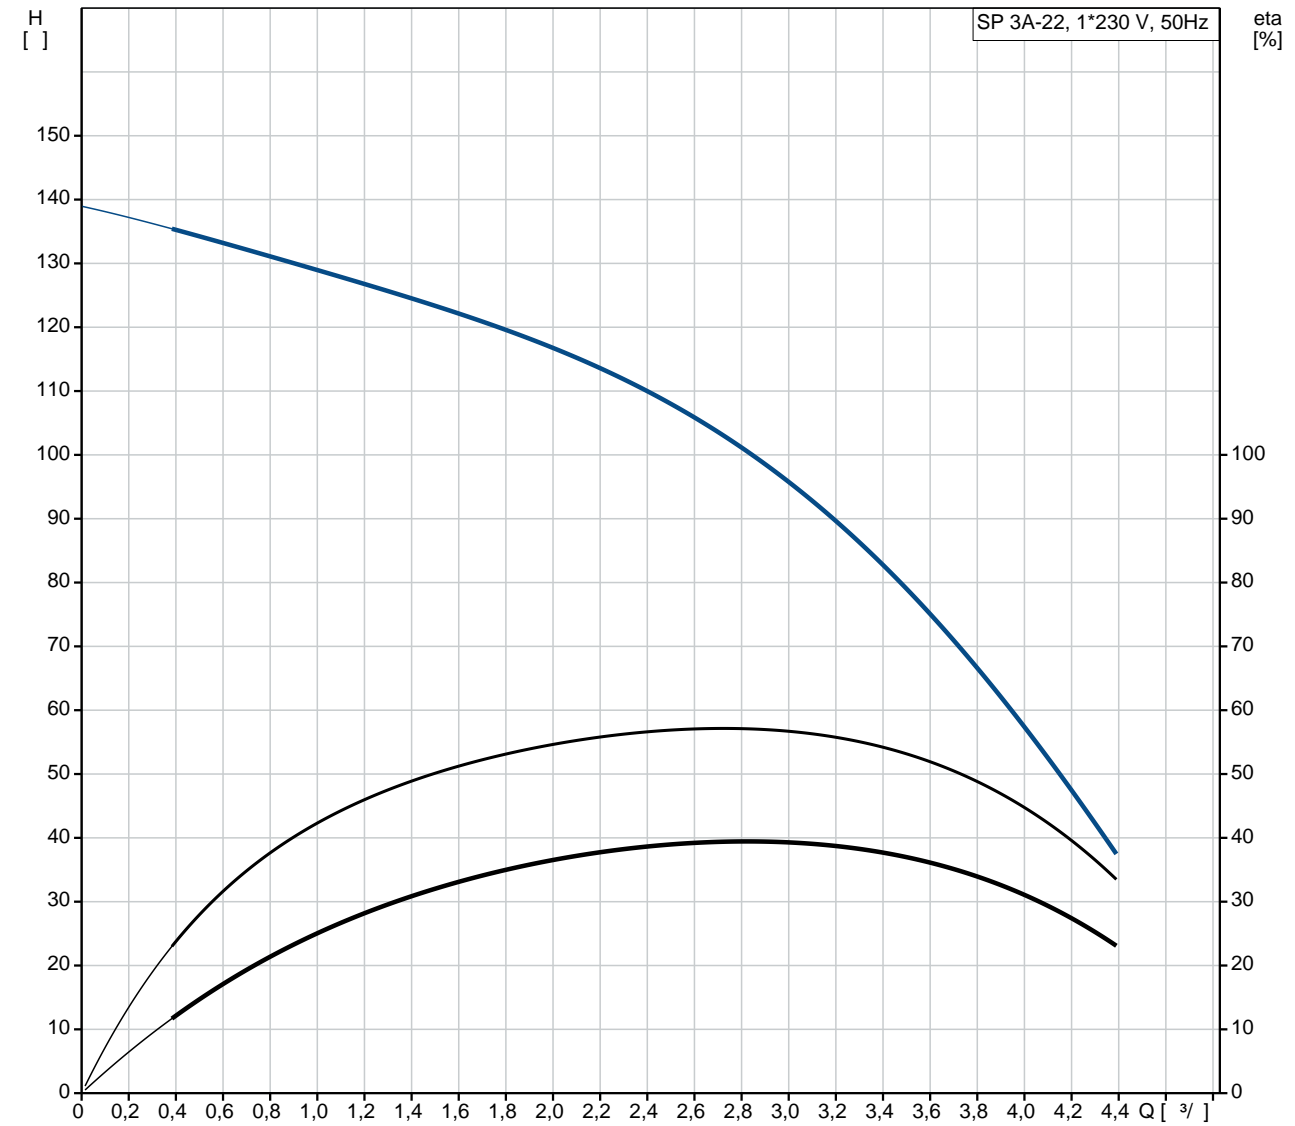

SP 3A-22
 EAN : 10002B22
 5700391124495
 2900 /
 3 3/
 98
 22
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / ³

MS402
 CSCR
 GRUNDFOS
 - P2: 1.5
 (2), 1.5

50 Hz
 1 x 230
 10.2 A
 460 %
 Cos - : 0.98
 2860 /


(IEC 34-5): IP68
 (IEC 85): B

79213106

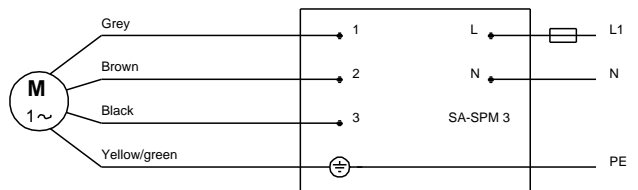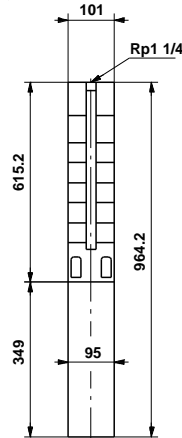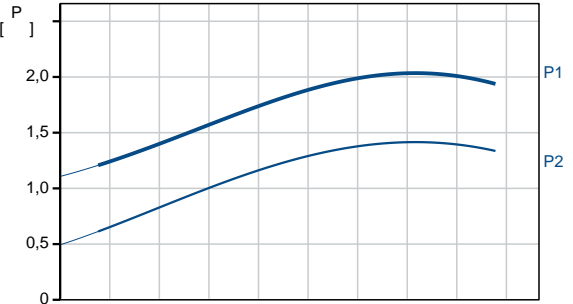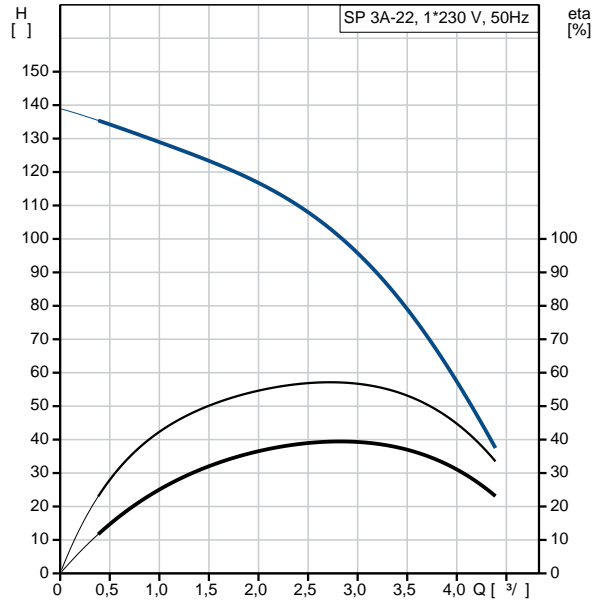

:	
MEI :	0.70
ErP :	EuP / .
:	17.5
:	19.3
:	21.7 ³
C :	DK
:	8413702900

10002B22 SP 3A-22 50

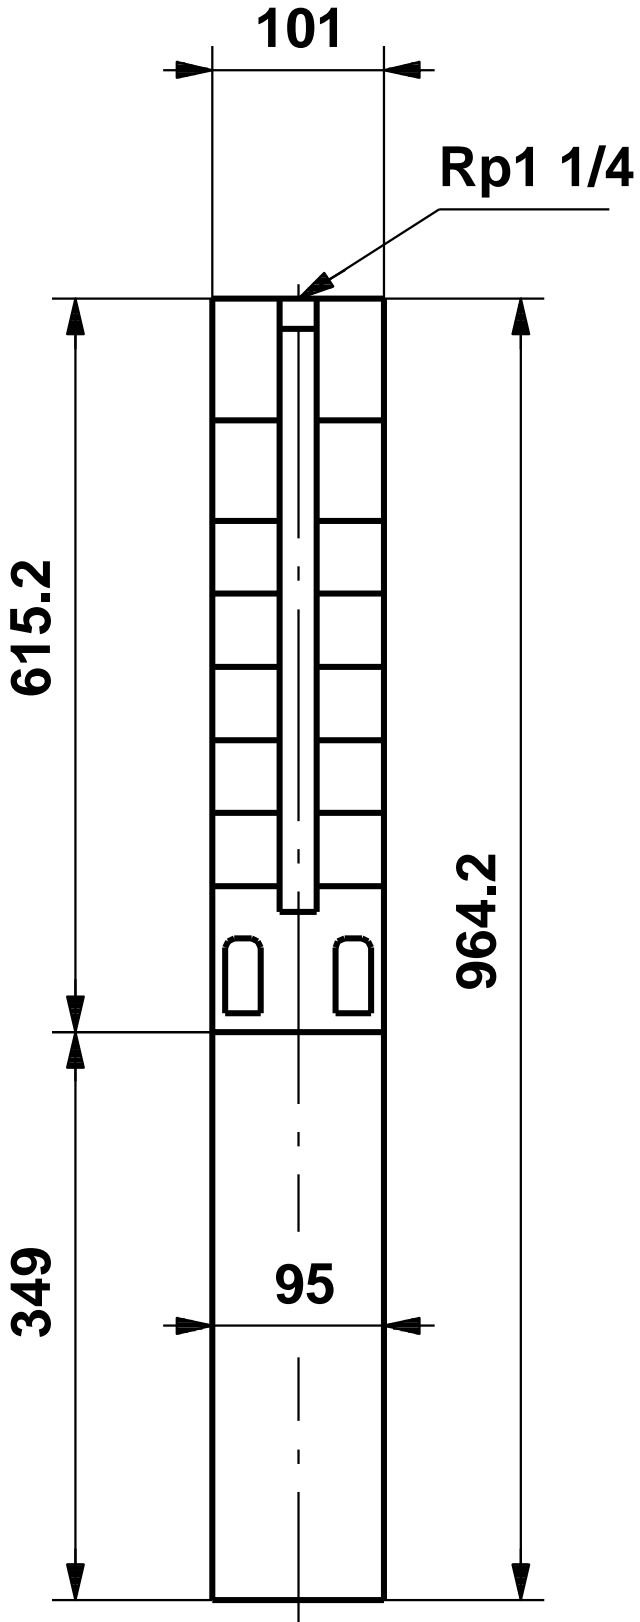

10002B22 SP 3A-22 50

