

1 SP 3A-25



: 10002B25

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 3 ³/₁₁₁
 : LIPSEAL
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : SPLINE


EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

:
 : Rp1 1/4
 : 4 inch
 :
 : MS402
 : CSCR
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 1 x 230
 : 10.2 A
 : 460 %
 Cos - : 0.98
 : 2860 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79213106
 :
 ErP : MEI : 0.70
 : EuP /
 : 18.2
 : 20
 : 21.7 ³
 C : DK
 : 8413702900

10002B25 SP 3A-25 50

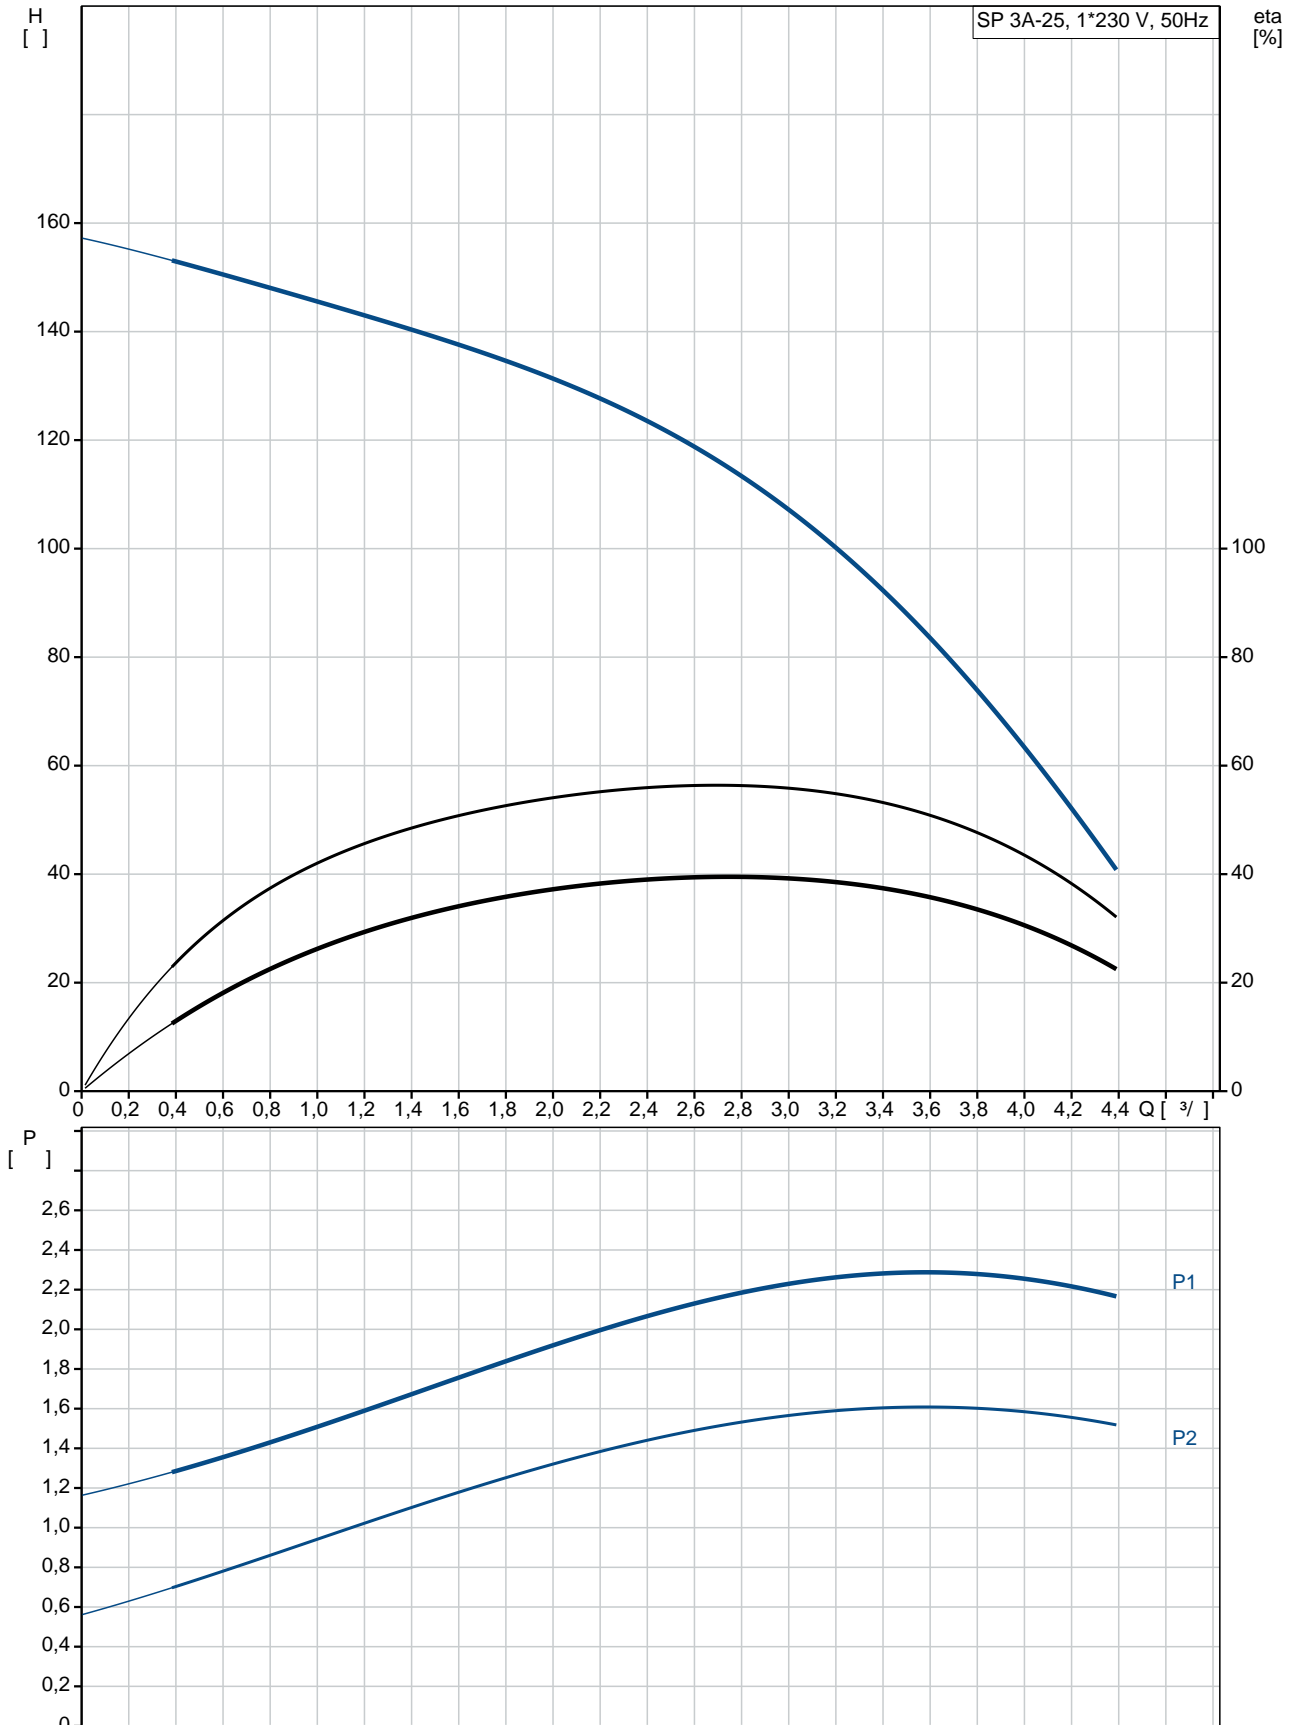

SP 3A-25
 10002B25
 EAN : 5700391124549

2900 /
 3 3/
 111
 25
 NONE
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 SPLINE

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

Rp1 1/4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3

MS402
 CSCR
 GRUNDFOS
 - P2: 1.5
 (2), 1.5

50 Hz
 1 x 230
 10.2 A
 460 %
 Cos - : 0.98
 2860 /


(IEC 34-5): IP68
 (IEC 85): B

79213106

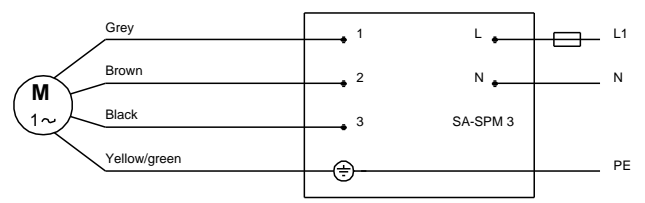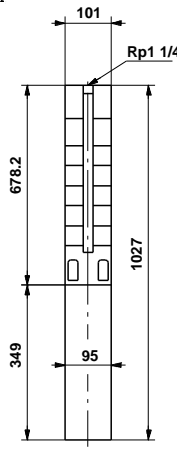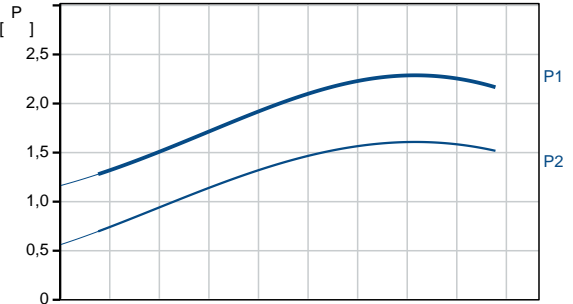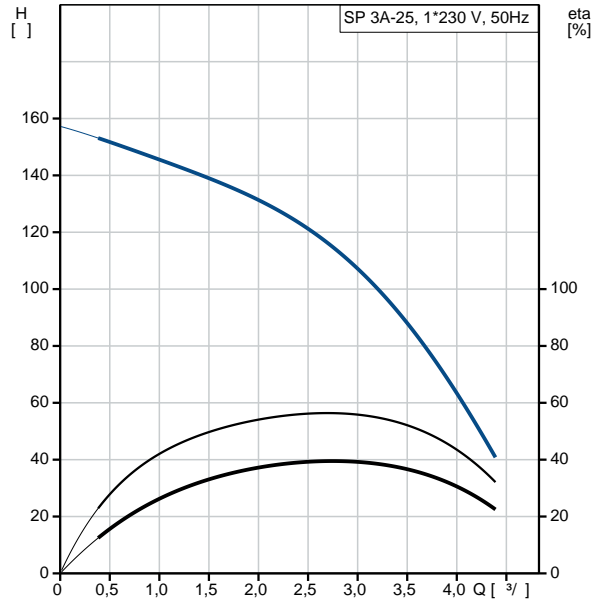

:	
MEI :	0.70
ErP :	EuP / .
:	18.2
:	20
:	21.7 ³
C :	DK
:	8413702900

10002B25 SP 3A-25 50

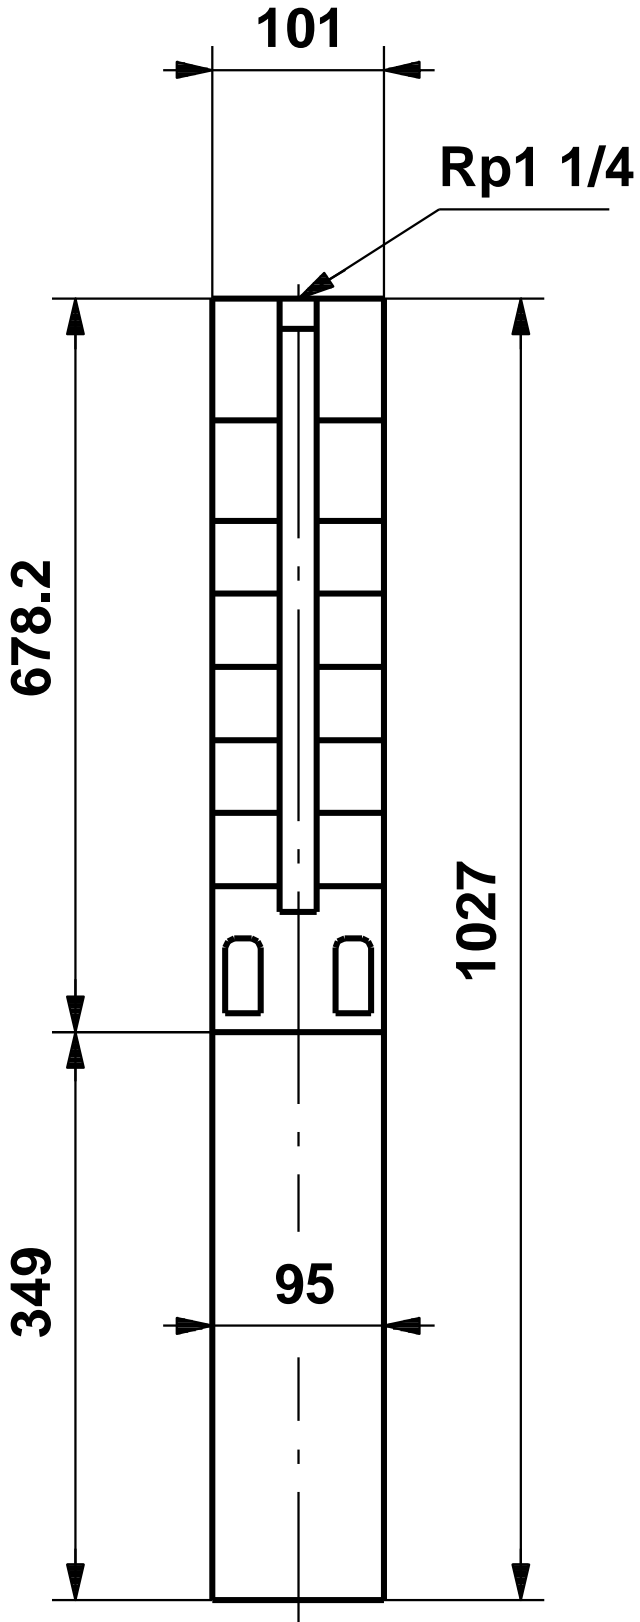

10002B25 SP 3A-25 50

