

1 SP 3A-33



: 10002B33

, EN 1.4301 (AISI 304),

MS40002.2

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / °C

: 2900 /

: 3 °/  
 : 147  
 : HM/CER  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE



EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

:  
 : Rp1 1/4  
 : 4 inch  
 :  
 : MS4000  
 : CSCR  
 - P2: 2.2  
 ( 2), : 2.2  
 : 50 Hz  
 : 1 x 220-230  
 : 14.6-15 A  
 : 540-600 %  
 Cos - : 0.96-0.96  
 : 2850-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79214507  
 :  
 : MEI : 0.70  
 ErP : EuP /  
 : 29.9  
 : 34.7  
 : 21.7 <sup>3</sup>  
 C : DK  
 : 8413702900

## 10002B33 SP 3A-33 50

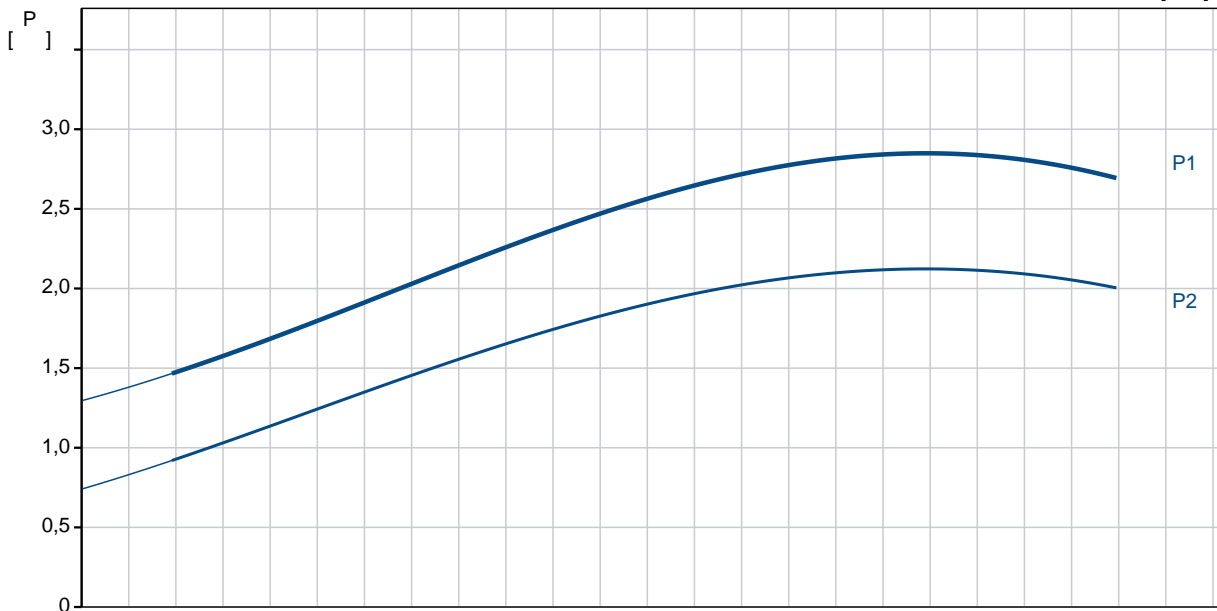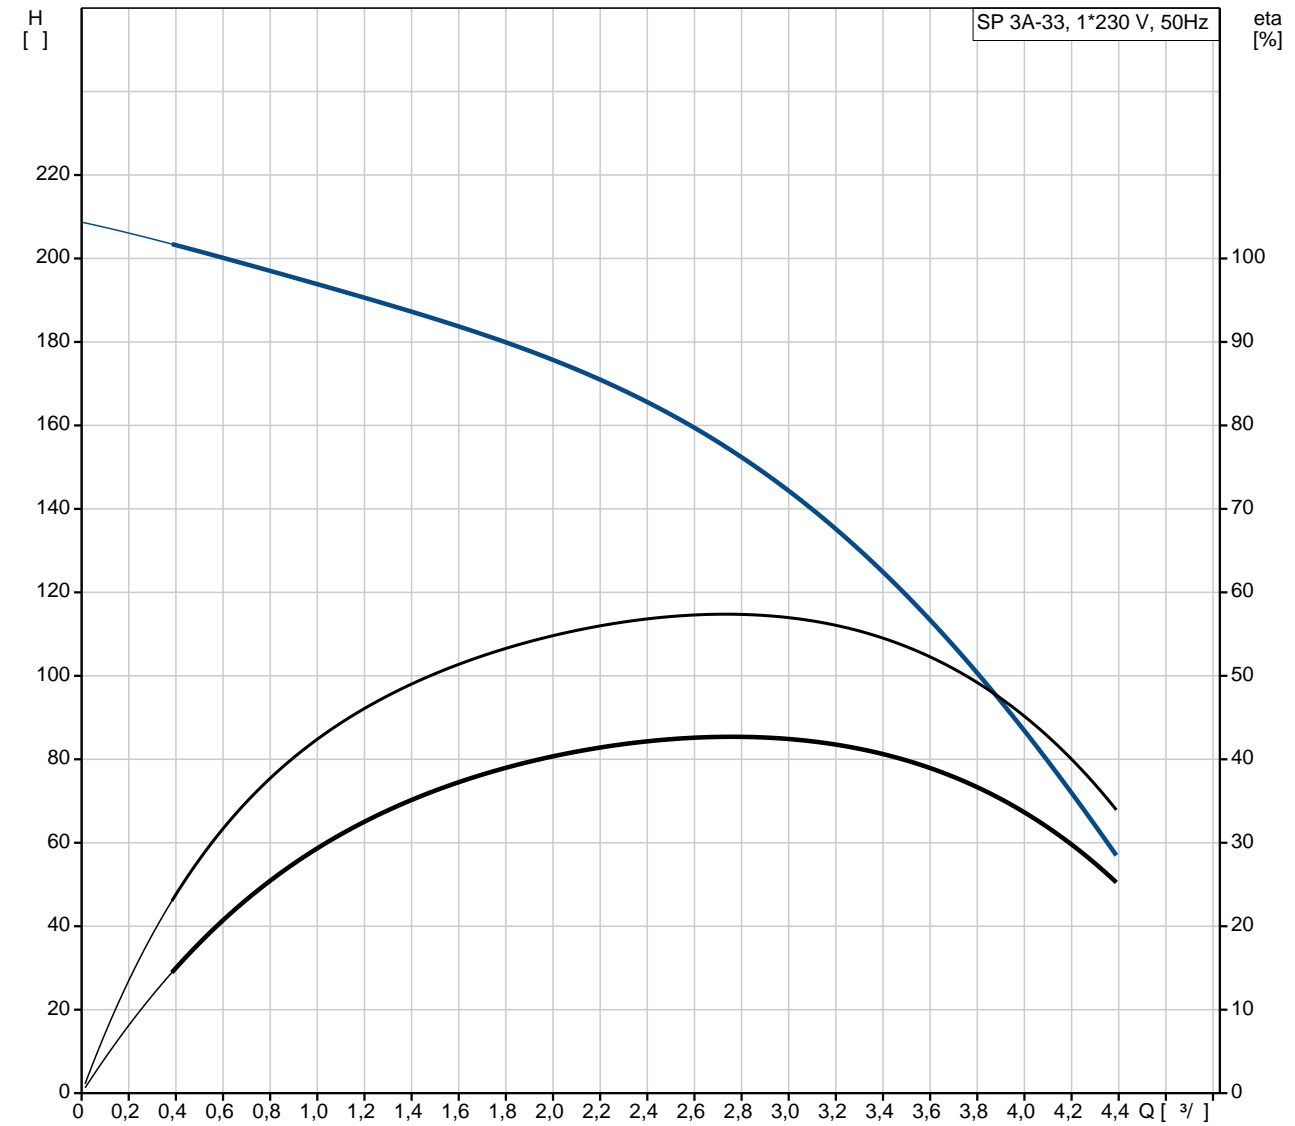

SP 3A-33  
 EAN : 10002B33  
 5700391124662  
 2900 /  
 3 3/  
 147  
 33  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40  
 SPLINE

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

Rp1 1/4  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS4000  
 CSCR  
 GRUNDFOS  
 - P2: 2.2  
 ( 2), 2.2

50 Hz  
 1 x 220-230  
 14.6-15 A  
 540-600 %  
 Cos - : 0.96-0.96  
 2850-2870 /


(IEC 34-5): IP68  
 (IEC 85): F

79214507

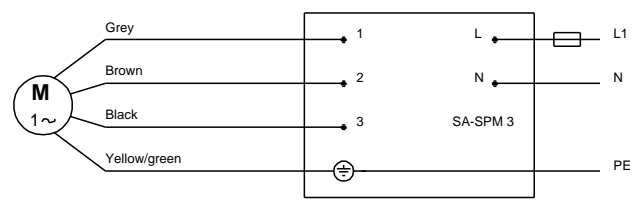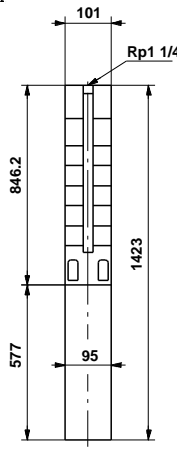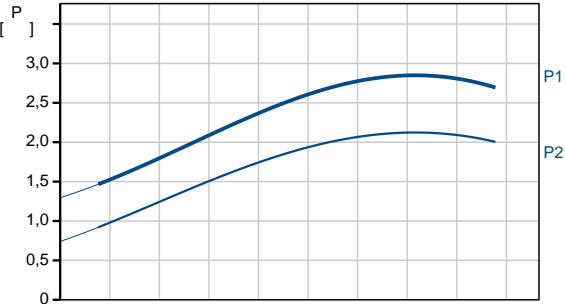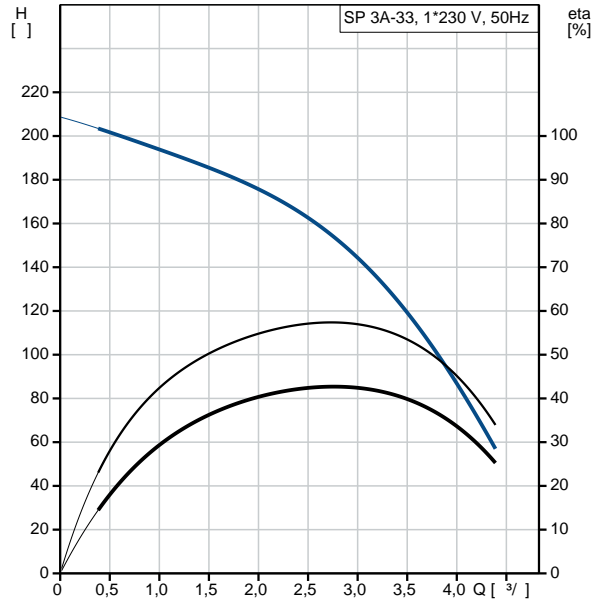

:	
MEI :	0.70
ErP :	EuP / .
:	29.9
:	34.7
:	21.7 <sup>3</sup>
C :	DK
:	8413702900

**10002B33 SP 3A-33 50**

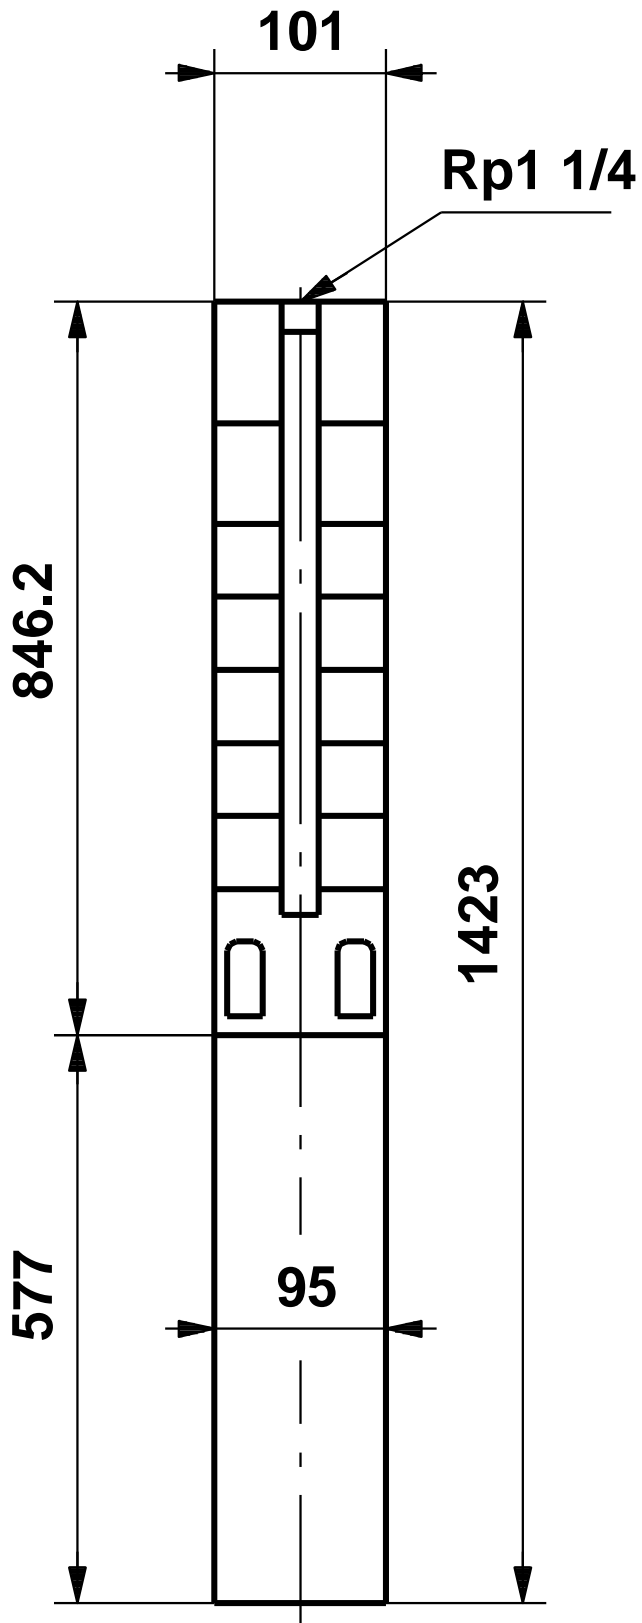

## 10002B33 SP 3A-33 50

