

1 SP 3A-25



: 10051K25

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 3 <sup>3</sup>/<sub>l</sub>  
 : 111  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304





DIN W.-Nr. 1.4301  
 AISI 304

:  
 : Rp1 1/4  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 4.10-4.20-4.40 A  
 : 490-500-500 %  
 Cos - : 0.80-0.75-0.70  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192006  
 :  
 ErP : MEI : 0.70  
 : EuP /  
 : 18.2  
 : 19.9  
 : 21.7 <sup>3</sup>

## 10051K25 SP 3A-25 50

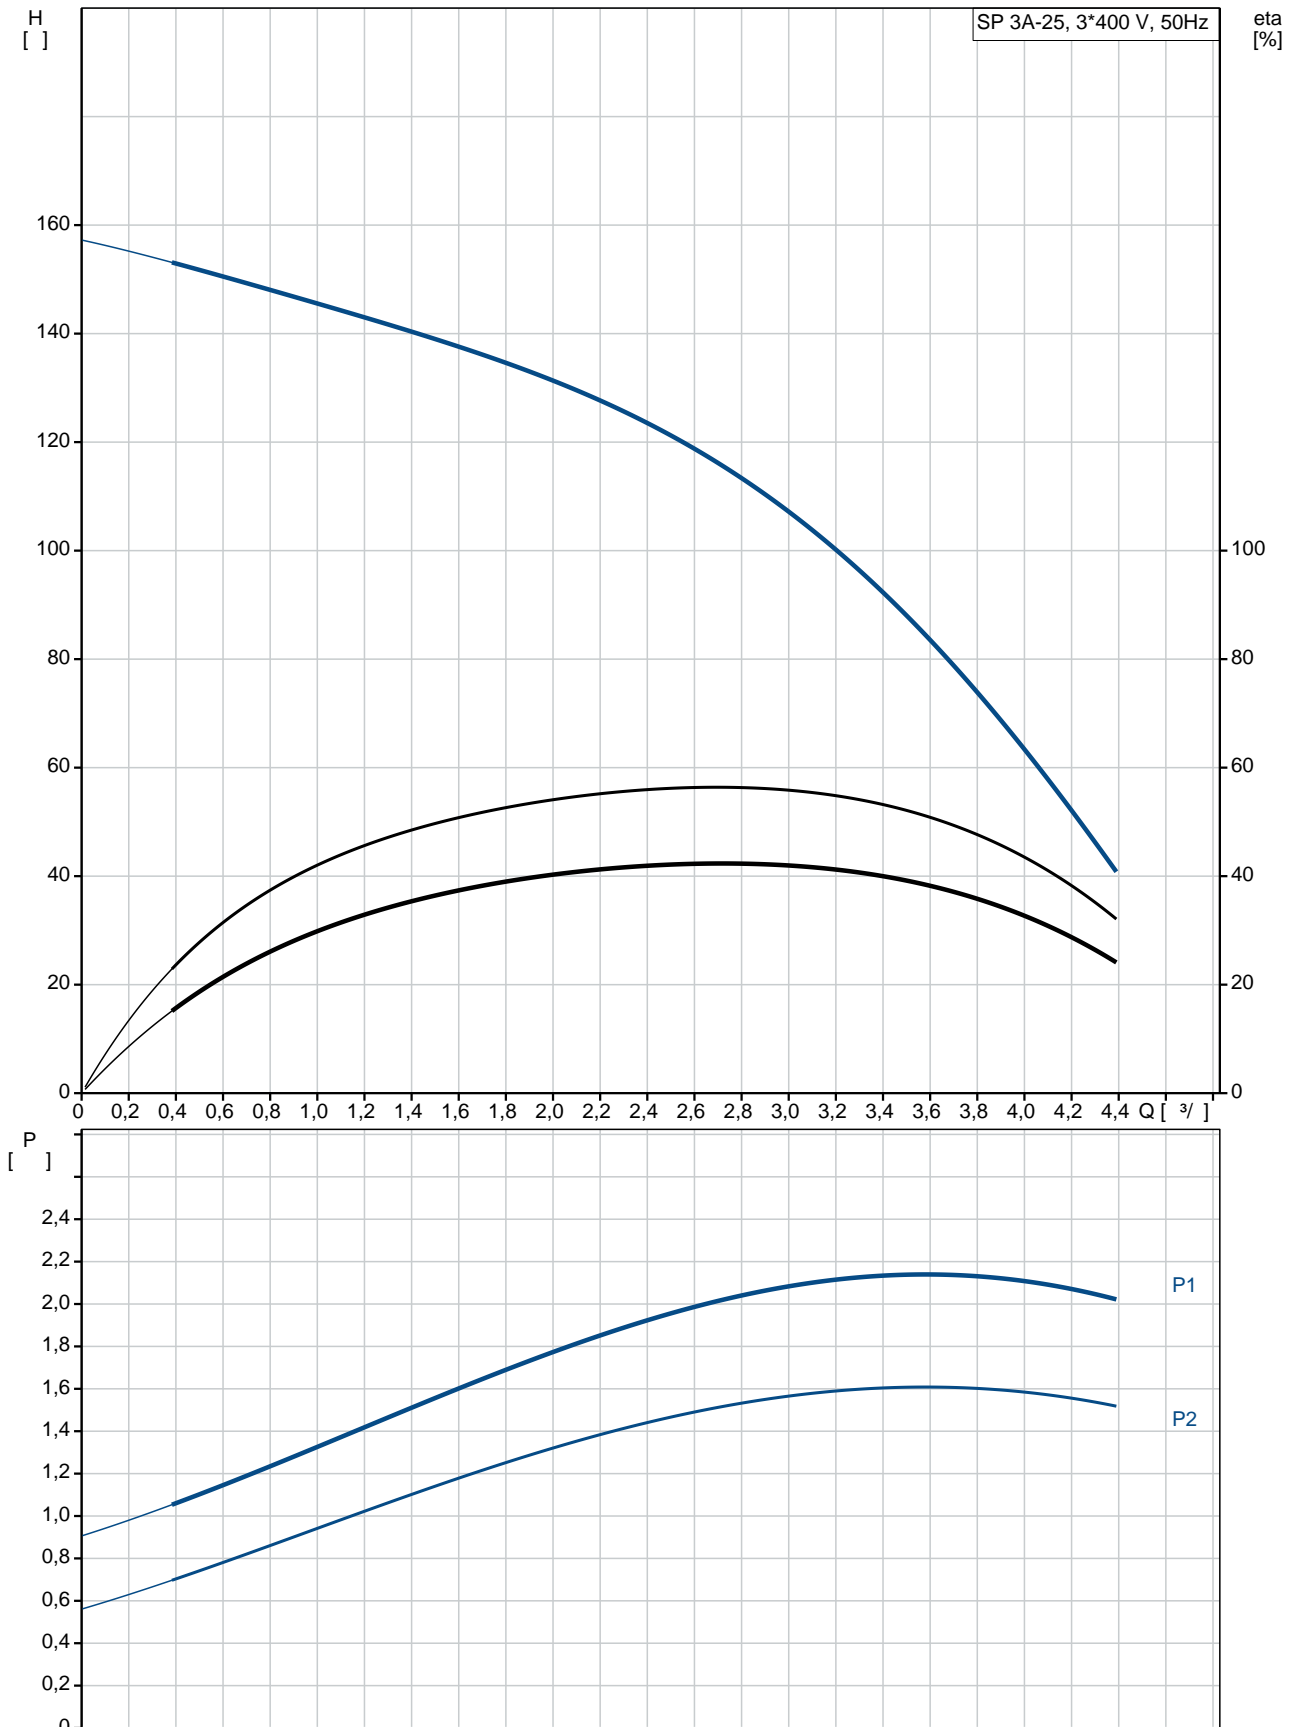


Model	SP 3A-25
EAN	10051K25 5700391262319
Flow rate	2900 /
Speed	3 3/
Number of poles	111
Efficiency class	25
Protection class	NONE
Sealing	LIPSEAL
Certification	CE,EAC
Standard	ISO9906:2012 3B
Material	A
Insulation class	NO
Temperature class	T40
Impeller type	SPLINE
Material	EN 1.4301 AISI AISI 304
Material	EN 1.4301 AISI AISI 304
Material	DIN W.-Nr. 1.4301 AISI 304
Thread	Rp1 1/4 4 inch
Maximum liquid temperature	40 °C
Temperature	0,15 / 40 °C
Temperature	20 °C
Flow rate	998.2 / <sup>3</sup>
Material	MS402
Manufacturer	GRUNDFOS
Efficiency class	- P2: 1.5
Efficiency class	( 2), 1.5
Frequency	50 Hz
Current	3 x 380-400-415 4.10-4.20-4.40 A
Efficiency class	490-500-500 %
Cos φ	0.80-0.75-0.70
Power	2850-2860-2870 /
Protection class	(IEC 34-5): IP68 (IEC 85): B
Product code	79192006

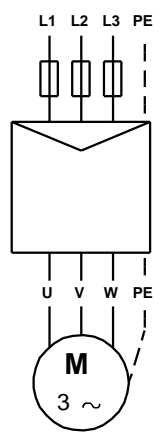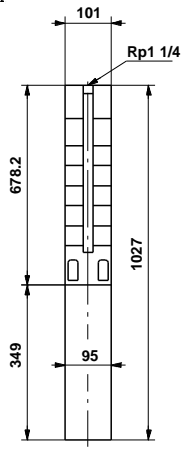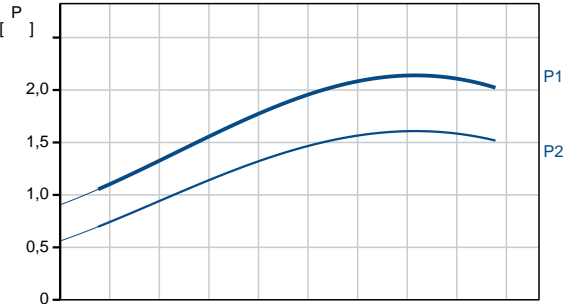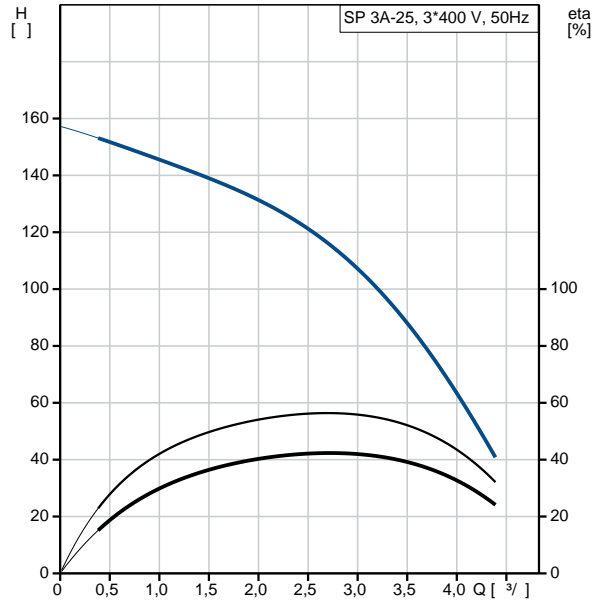


MEI :		0.70
ErP :	EuP	/ .
:		18.2
:		19.9
:		21.7 <sup>3</sup>

**10051K25 SP 3A-25 50**

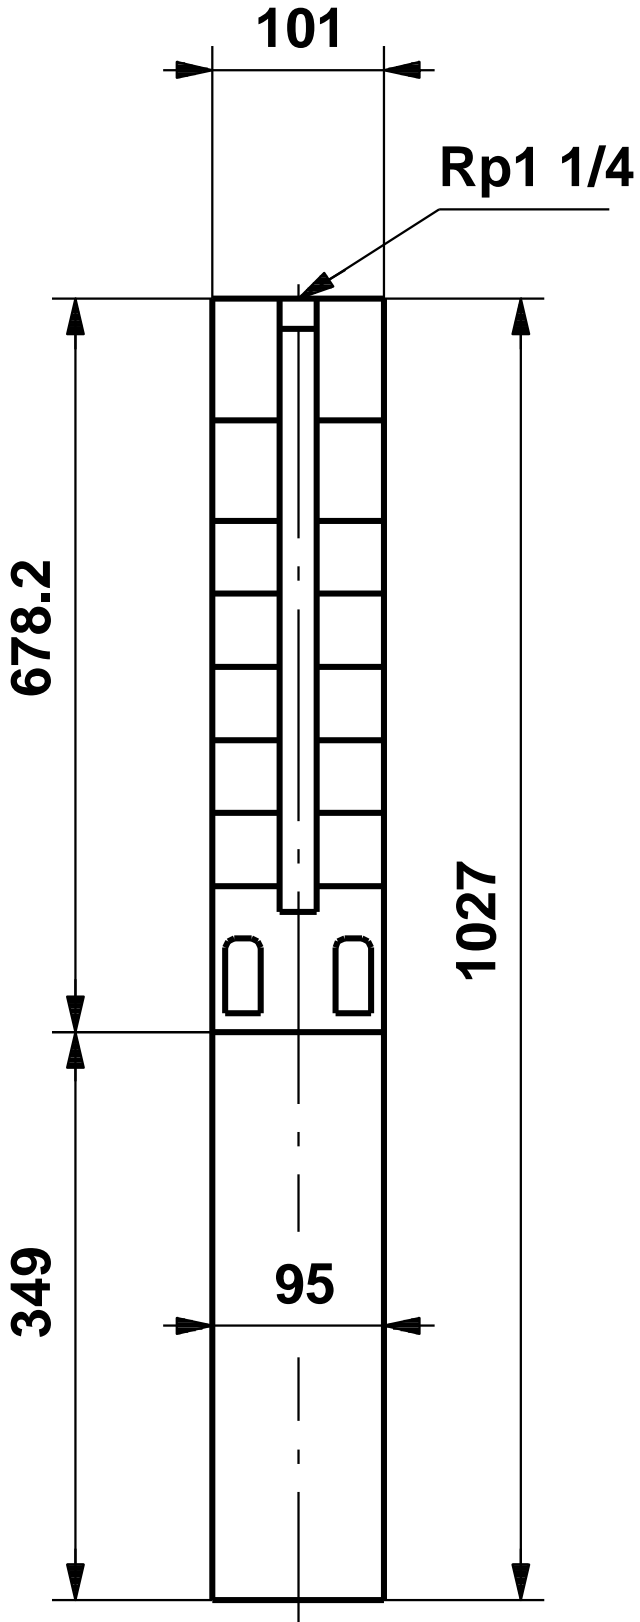

10051K25 SP 3A-25 50

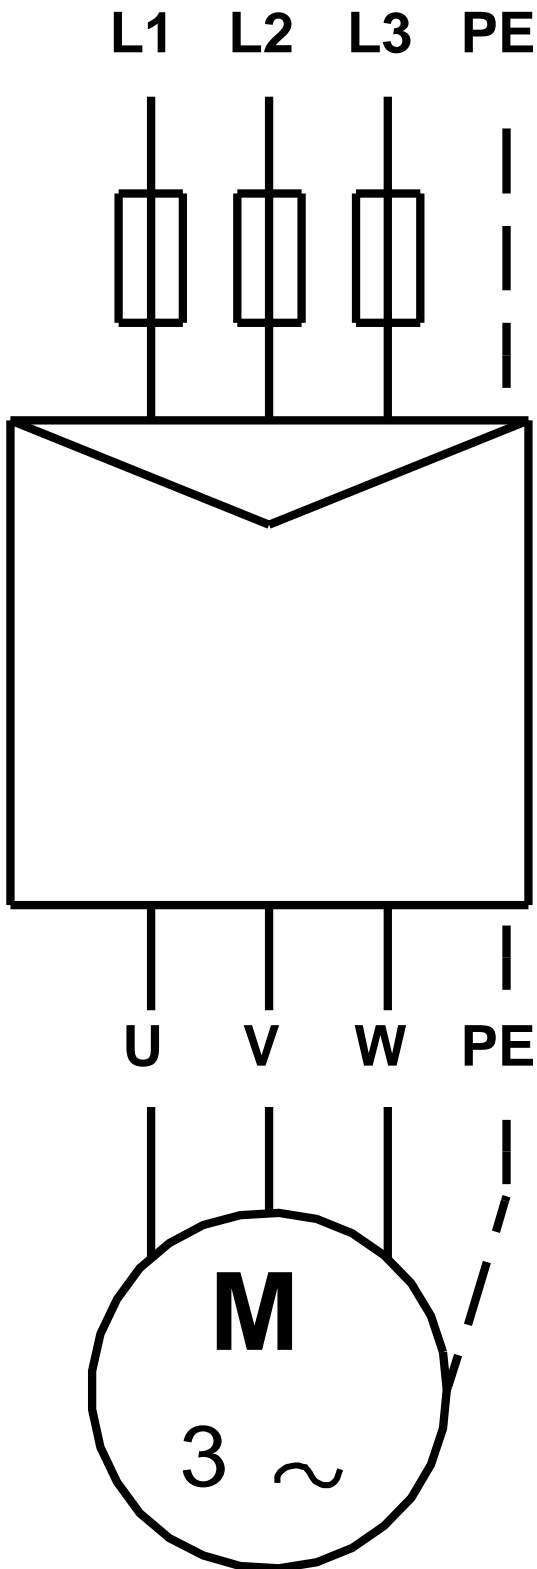

! [ ], .