

1 SP 17-2



: 12A01902

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 17 <sup>3</sup>/<sub>16</sub>  
 : 15

: LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4301  
 AISI AISI 304


EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: RP2 1/2  
 : 4 inch

: MS402  
 - P2: 1.1  
 ( 2), : 1.1  
 : 50 Hz  
 : 3 x 380-400-415  
 : 3.25-3.40-3.65 A  
 : 480-480-470 %  
 Cos - : 0.76-0.72-0.65  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192005  
 :  
 ErP : EuP MEI : 0.70  
 : 16.4 /  
 : 18.9  
 : 0.032 <sup>3</sup>  
 Danish VVS No.: 388336020  
 Finnish LVI No.: 4762715  
 C : DK  
 : 8413702900

## 12A01902 SP 17-2 50

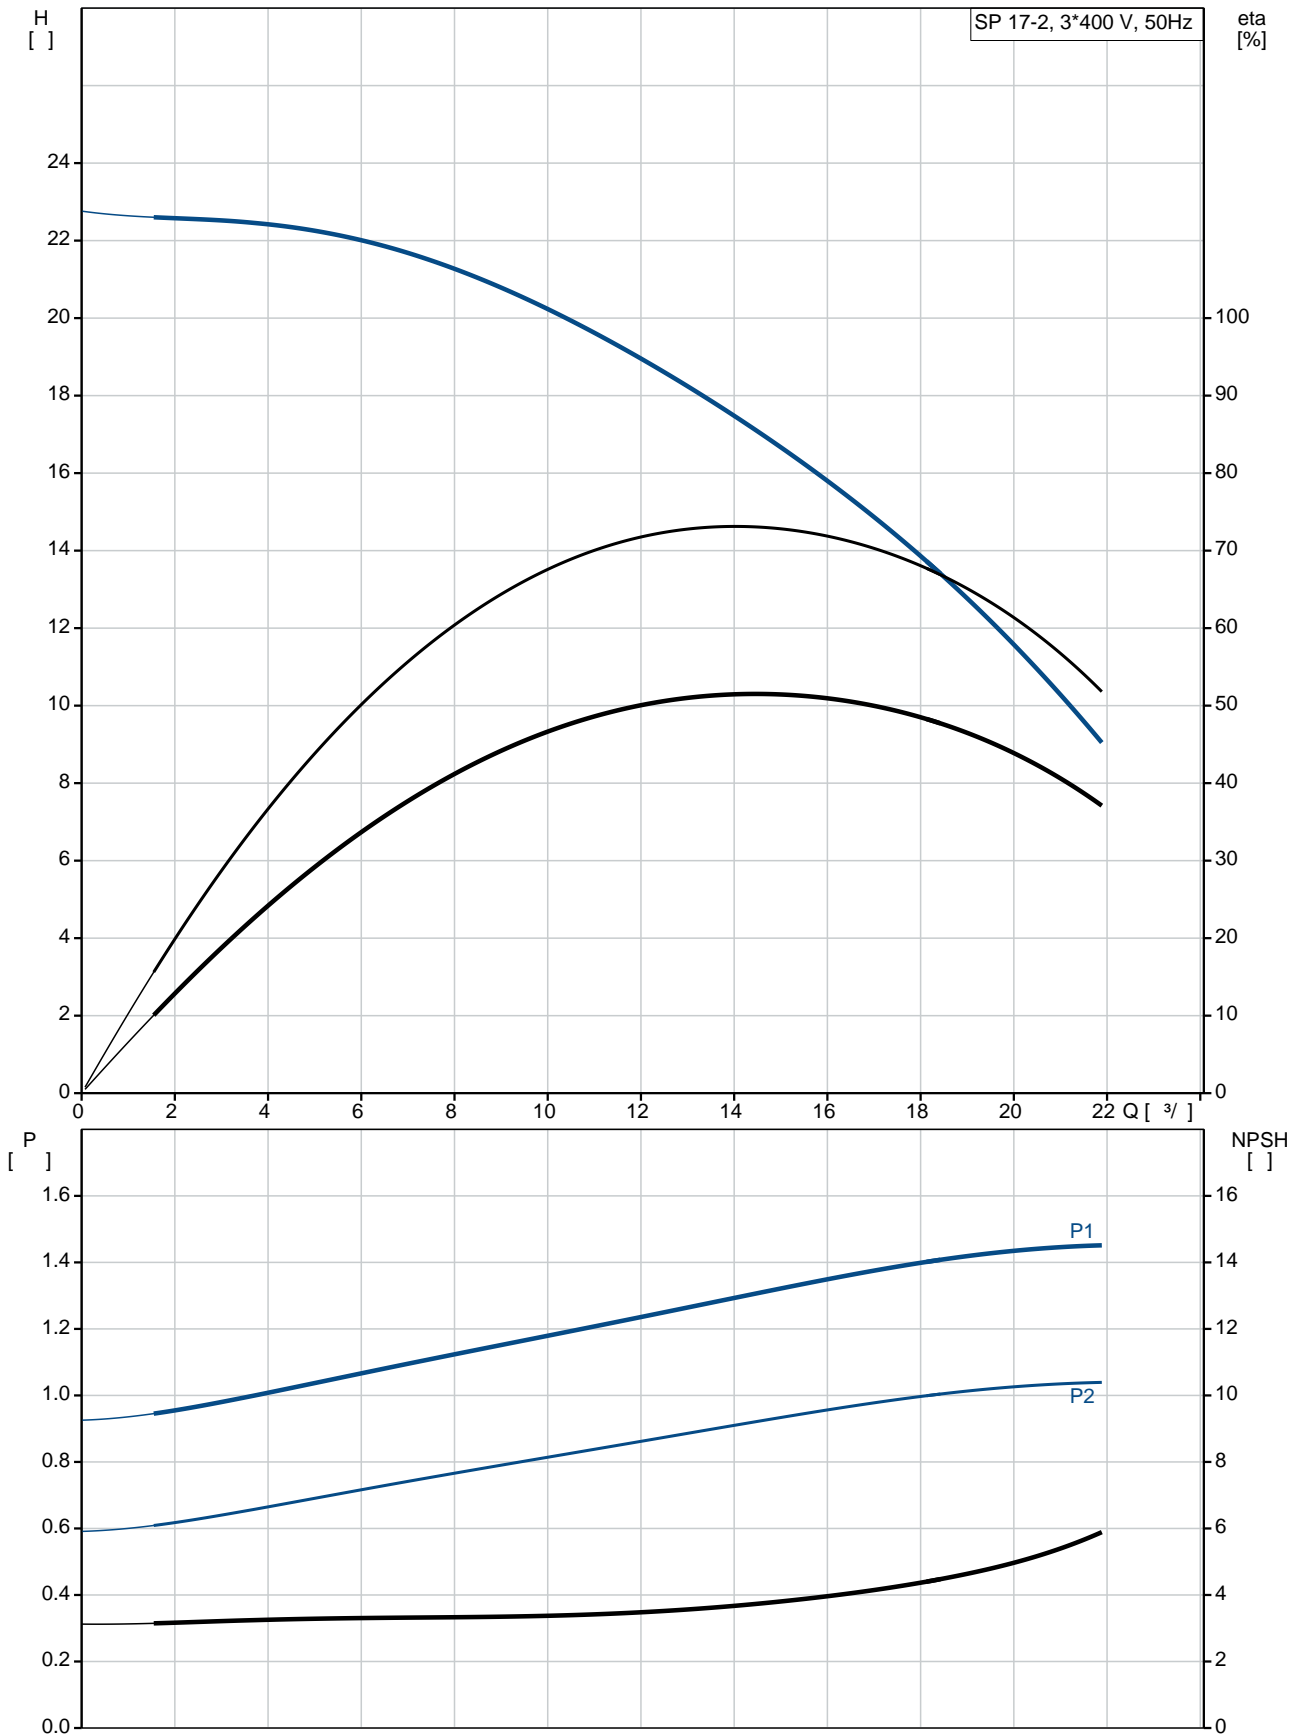

SP 17-2  
 EAN : 12A01902  
 5700391130892  
 2900 /  
 17 <sup>3/</sup>  
 15  
 2  
 NONE  
 LIPSEAL  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

RP2 1/2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS402  
 GRUNDFOS  
 - P2: 1.1  
 ( 2), 1.1

50 Hz  
 3 x 380-400-415  
 3.25-3.40-3.65 A  
 480-480-470 %  
 Cos - : 0.76-0.72-0.65  
 2850-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): B

79192005

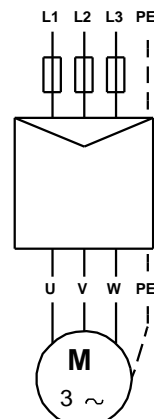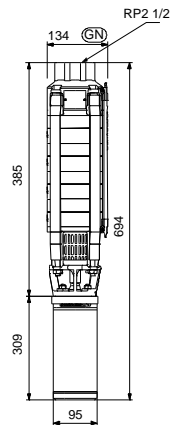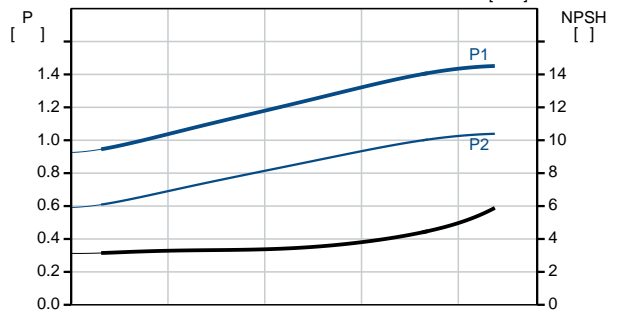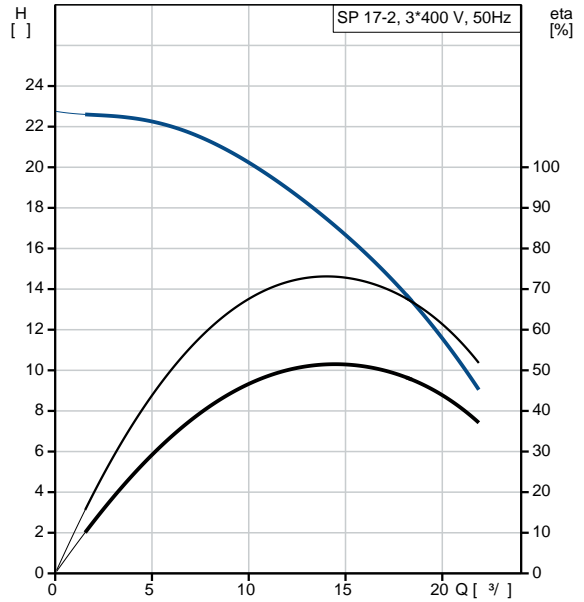

MEI :		0.70
ErP :	EuP	/ .
:		16.4
:		18.9
:		0.032 <sup>3</sup>
Danish VVS No.:		388336020
Finnish LVI No.:		4762715
C :	DK	
:		8413702900

## 12A01902 SP 17-2 50

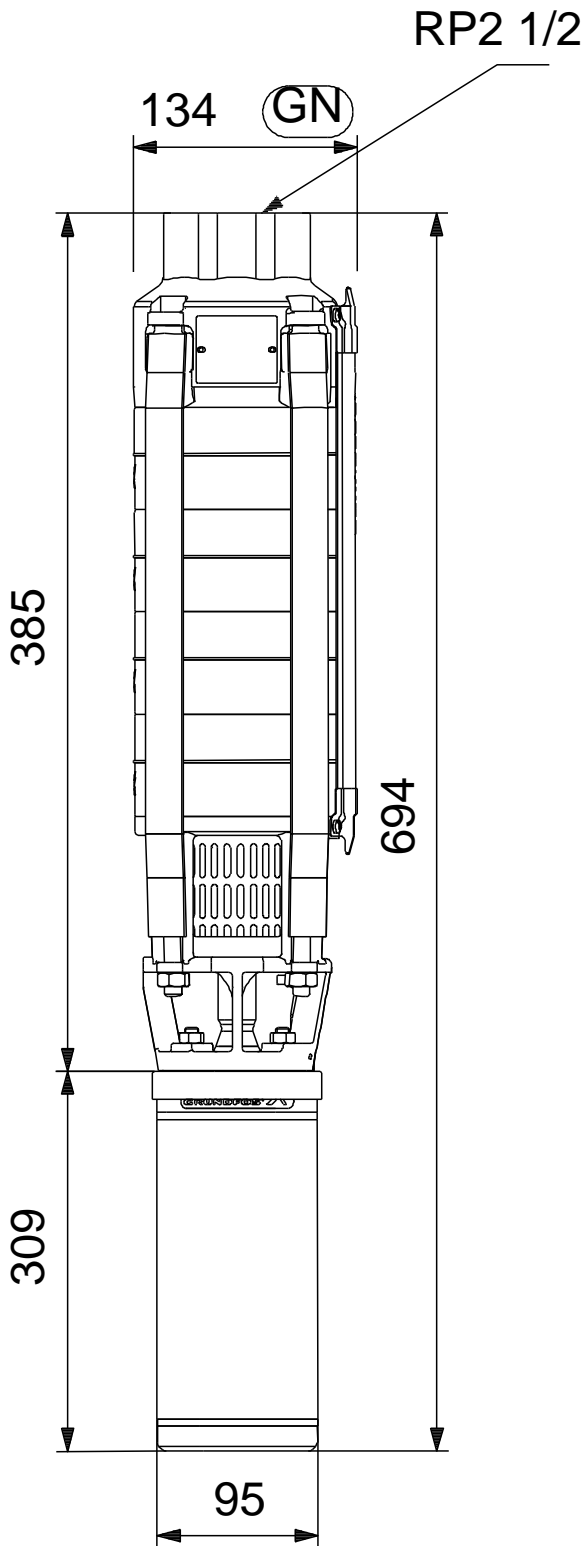

12A01902 SP 17-2 50



! [ ], .