

1 SP 17-4



: 12A01904

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

: 17 ³/₃₂

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301
AISI AISI 304


EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304





RP2 1/2
: 4 inch

: MS402
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.50-5.50-5.70 A
 : 440-460-470 %
 Cos - : 0.85-0.82-0.77
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192007
 :
 ErP : MEI : 0.70
 : EuP / .
 : 22.2
 : 24.8
 : 0.032 ³
 Danish VVS No.: 388336040
 Finnish LVI No.: 4762717
 C : DK
 : 8413702900

12A01904 SP 17-4 50

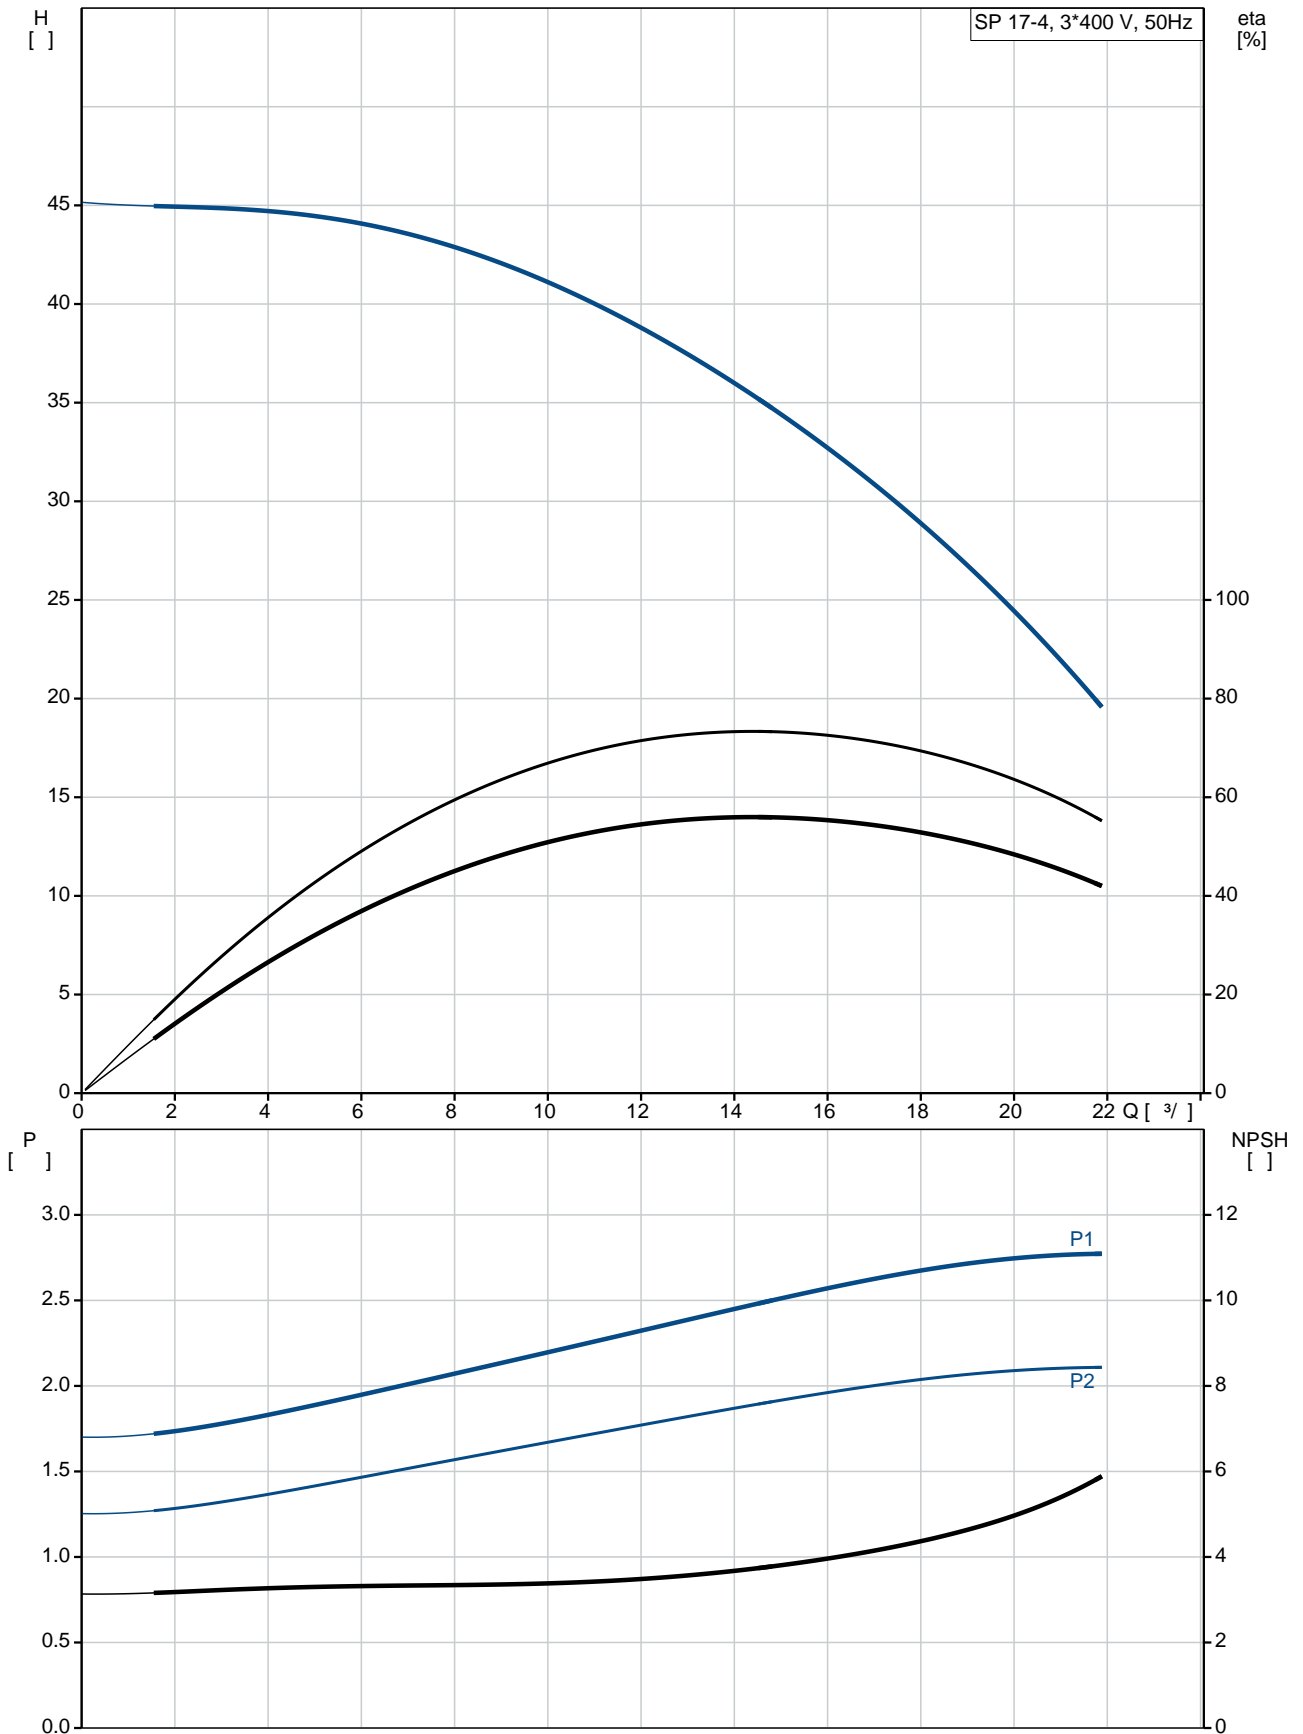


	SP 17-4
	12A01904
EAN	5700391130960
	2900 /
	17 ^{3/}
	32
	4
	NONE
	LIPSEAL
	CE,EAC
	ISO9906:2012 3B
	B
	YES
	T40
	EN 1.4301
	AISI AISI 304
	EN 1.4301
	AISI AISI 304
	DIN W.-Nr. 1.4301
	AISI 304
	RP2 1/2
	4 inch
Maximum liquid temperature:	40 °C
.t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS402
	GRUNDFOS
- P2:	2.2
(2),	2.2
	50 Hz
	3 x 380-400-415
	5.50-5.50-5.70 A
	440-460-470 %
Cos	0.85-0.82-0.77
	2850-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	B
	79192007

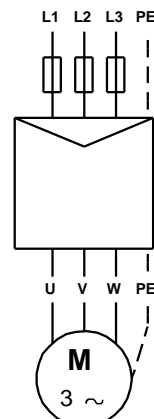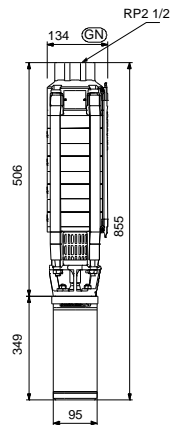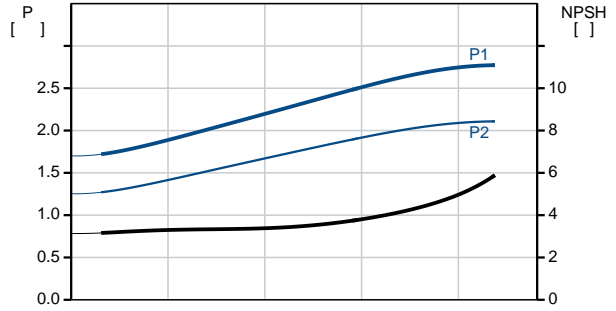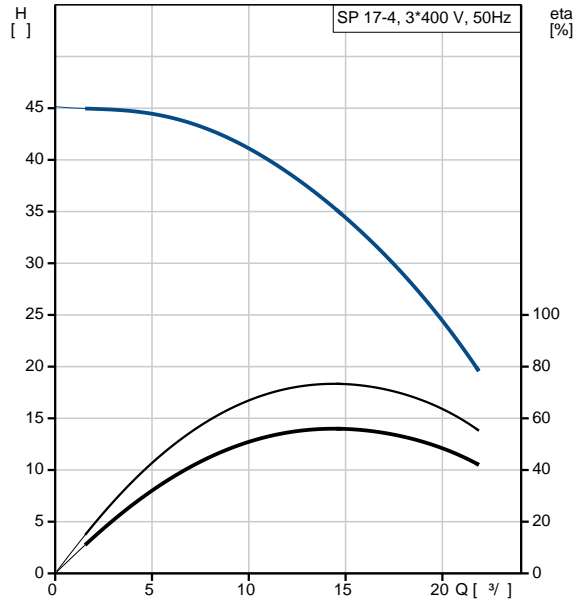


MEI :		0.70
ErP :	EuP	/ .
:		22.2
:		24.8
:		0.032 ³
Danish VVS No.:		388336040
Finnish LVI No.:		4762717
C :	DK	
:		8413702900

12A01904 SP 17-4 50

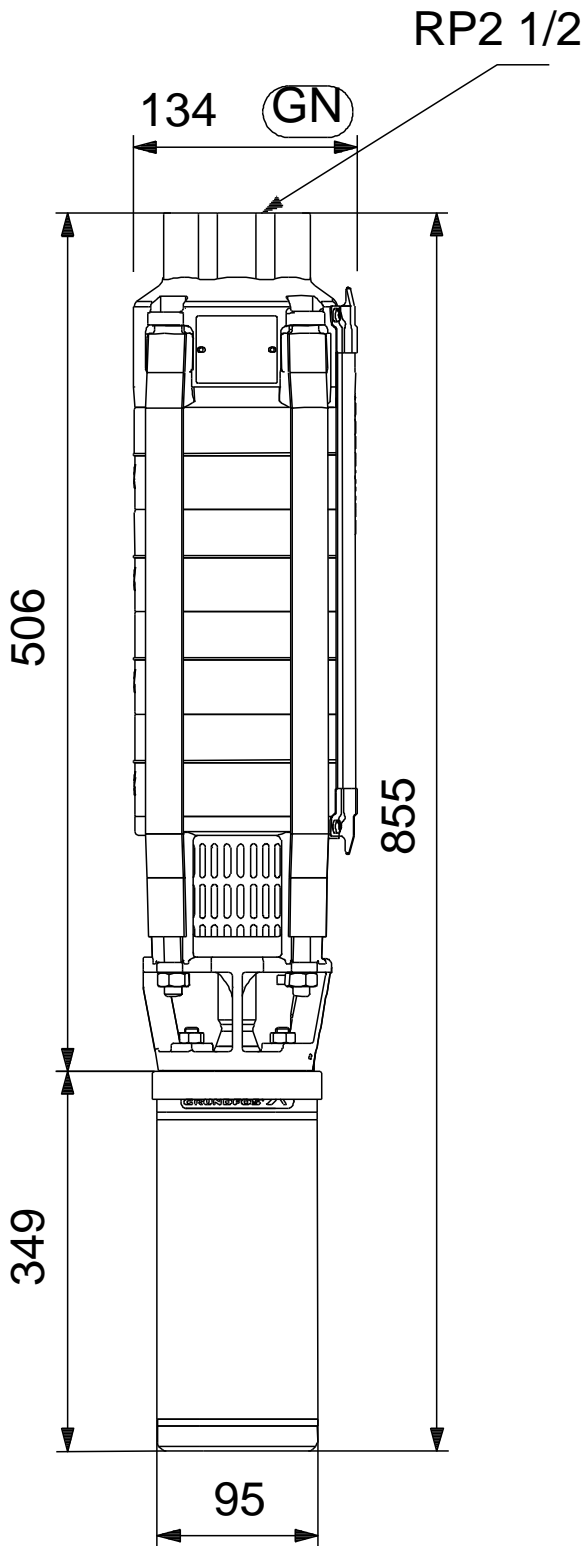

12A01904 SP 17-4 50

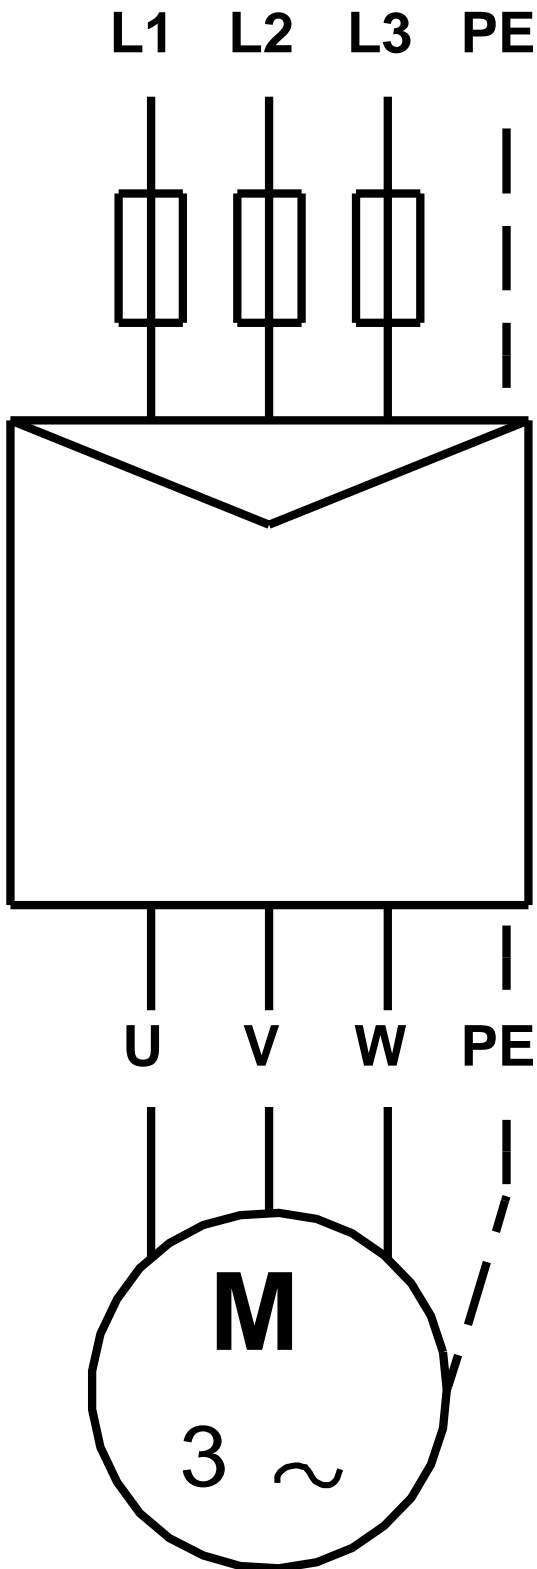

!

[],