

1 SP 17-5



: 12A01905

, EN 1.4301 (AISI 304),

MS40003

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 17 <sup>3</sup>/<sub>4</sub>  
 : 40

: HM/CER  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4301  
 AISI AISI 304


EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: RP2 1/2  
 : 4 inch

: MS4000  
 - P2: 3  
 ( 2), : 3  
 : 50 Hz  
 : 3 x 380-400-415  
 : 7.70-7.85-8.10 A  
 : 460-490-500 %  
 Cos - : 0.82-0.77-0.73  
 : 2850-2865-2875 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79194508  
 :  
 ErP : EuP MEI : 0.70  
 : 28.7 /  
 : 33.1  
 : 0.052 <sup>3</sup>  
 Danish VVS No.: 388336050  
 Finnish LVI No.: 4762718  
 C : DK  
 : 8413702900

## 12A01905 SP 17-5 50

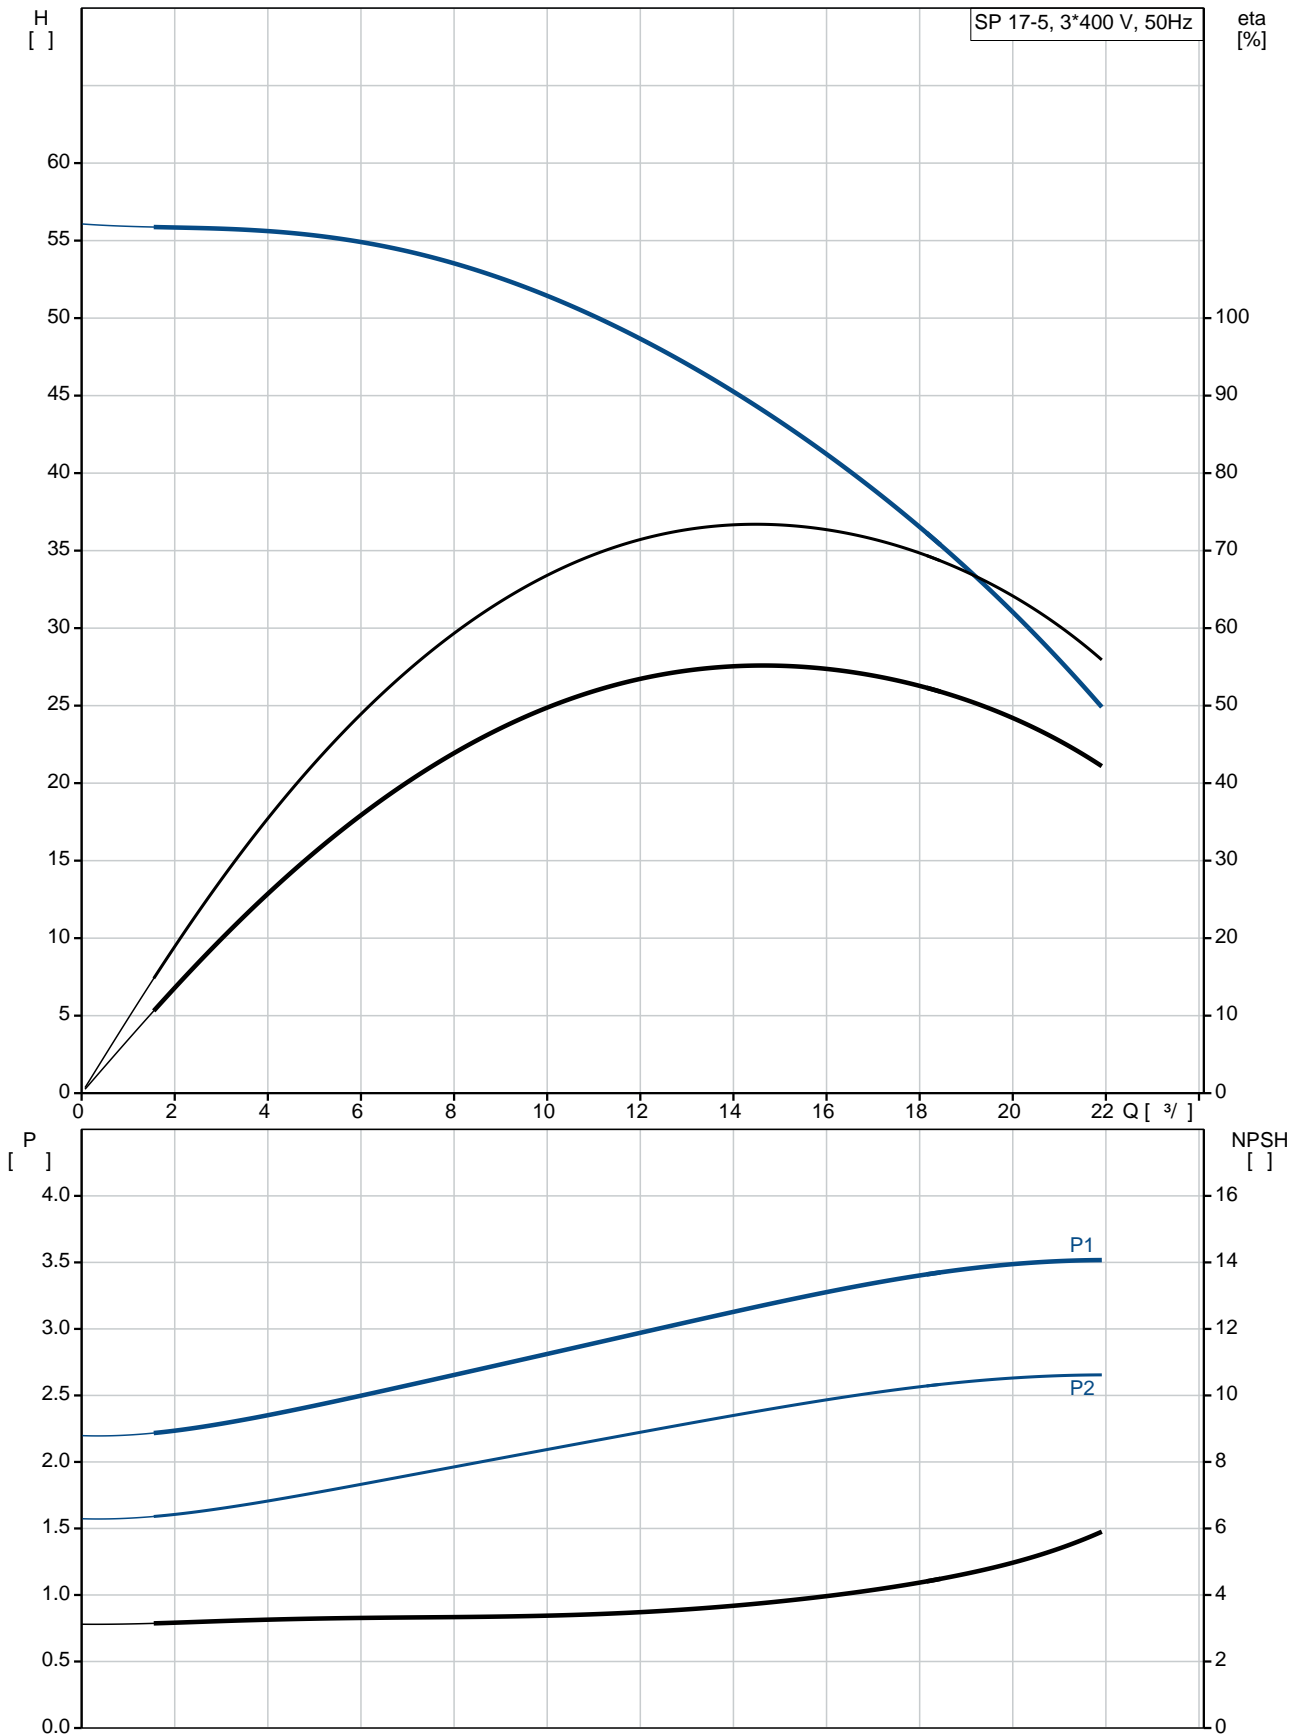

SP 17-5  
 EAN : 12A01905  
 5700391130991  
 2900 /  
 17 <sup>3/</sup>  
 40  
 5  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

RP2 1/2  
 4 inch

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>





MS4000  
 GRUNDFOS  
 - P2: 3

( 2), 3

50 Hz  
 3 x 380-400-415  
 7.70-7.85-8.10 A  
 460-490-500 %  
 Cos - : 0.82-0.77-0.73  
 2850-2865-2875 /


(IEC 34-5): IP68  
 (IEC 85): F

79194508

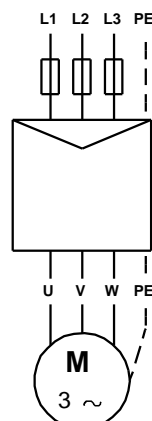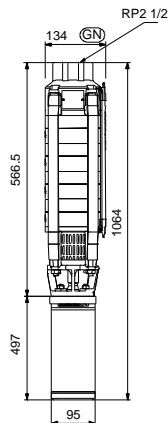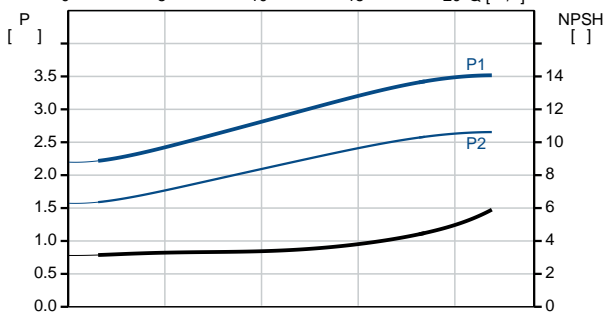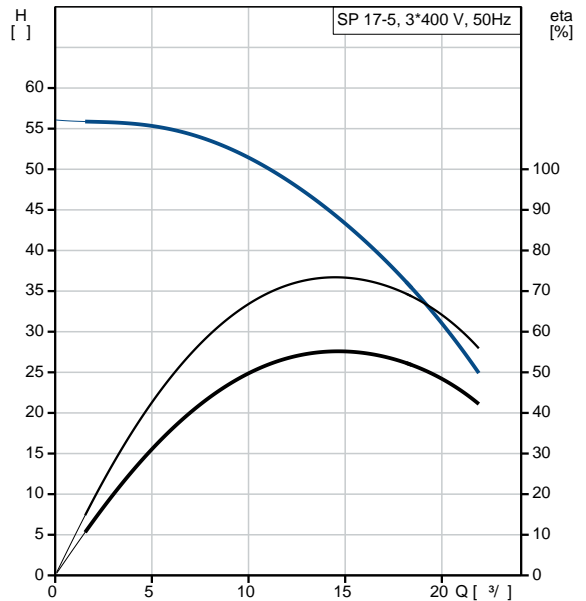


MEI :		0.70
ErP :	EuP	/ .
:		28.7
:		33.1
:		0.052 <sup>3</sup>
Danish VVS No.:		388336050
Finnish LVI No.:		4762718
C :	DK	
:		8413702900

## 12A01905 SP 17-5 50

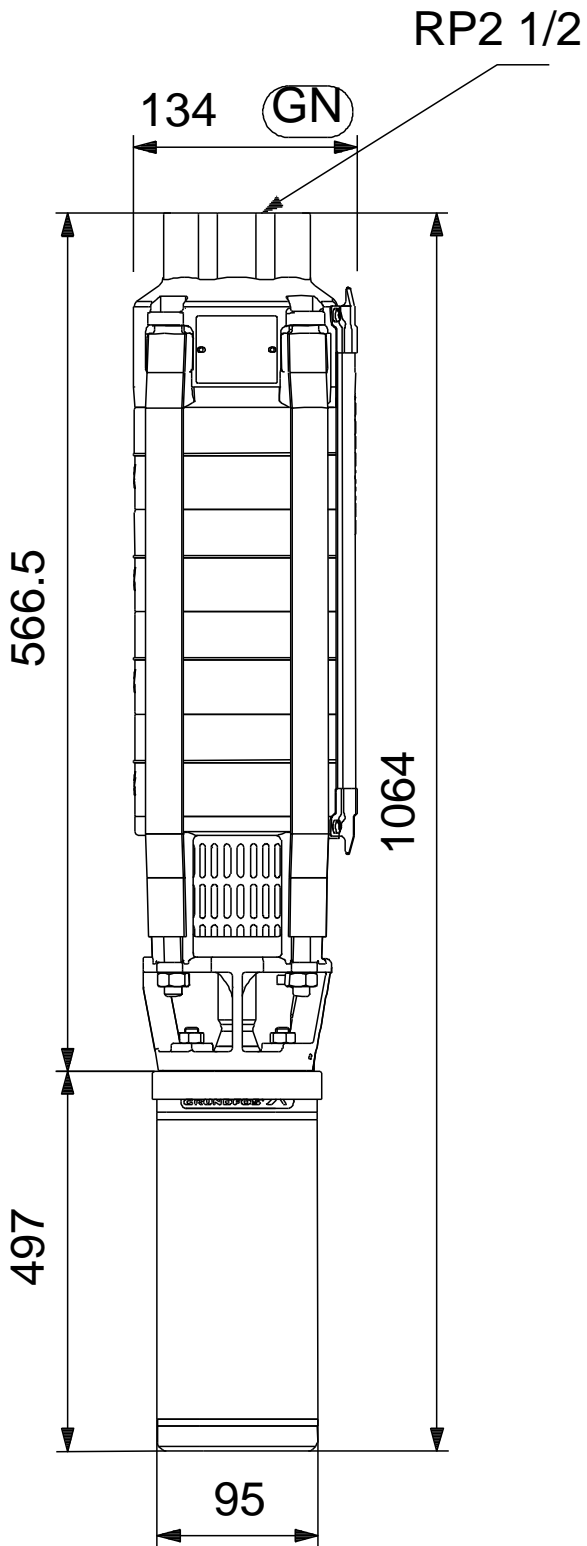

12A01905 SP 17-5 50

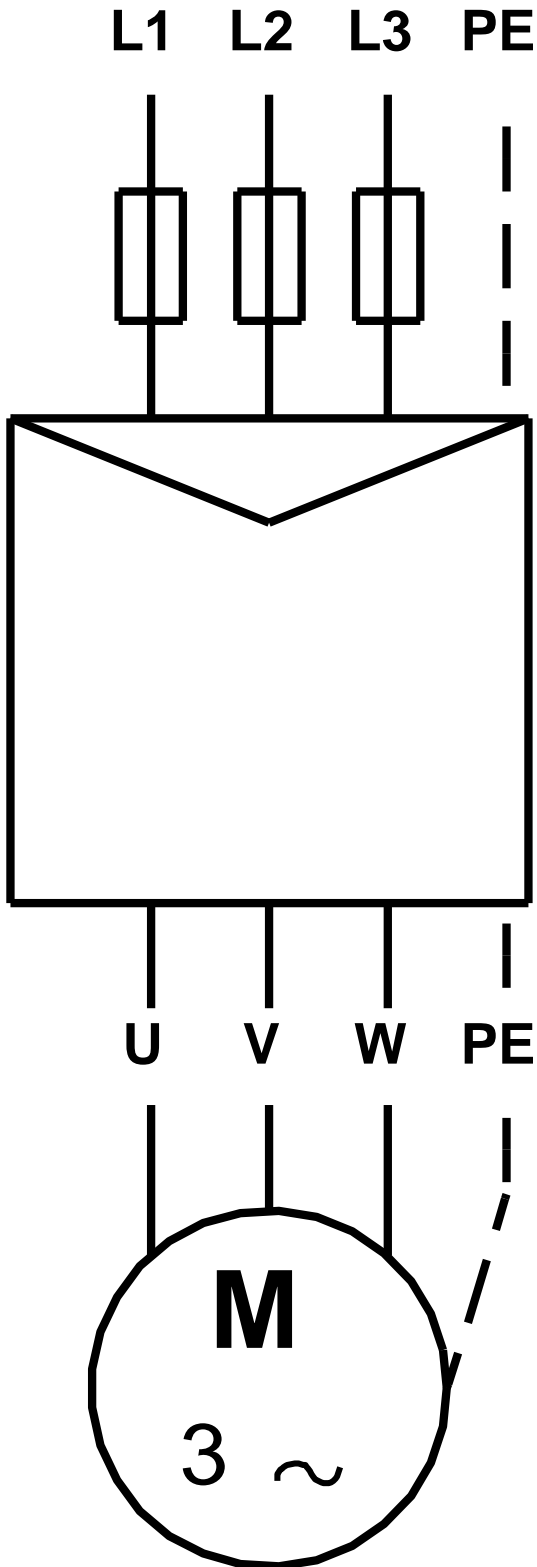

! [ ], .