

1 SP 17-1N



: 12C01901

, EN 1.4401 (AISI 316),  
MS40000.75

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 17 <sup>3</sup>/<sub>7</sub>

: SIC/SIC  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4401  
AISI AISI 316


EN 1.4401  
AISI AISI 316

DIN W.-Nr. 1.4539  
AISI 904 L





: RP2 1/2  
 : 4 inch

: MS4000  
 - P2: 0.75  
 ( 2), : 0.75  
 : 50 Hz  
 : 3 x 380-400-415  
 : 1.92-1.84-1.84 A  
 : 430-480-510 %  
 Cos - : 0.86-0.84-0.82  
 : 2850-2870-2880 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195604  
 :  
 ErP : MEI : 0.70  
 : EuP /  
 : 19.2  
 : 21.8  
 : 0.032 <sup>3</sup>

## 12C01901 SP 17-1N 50

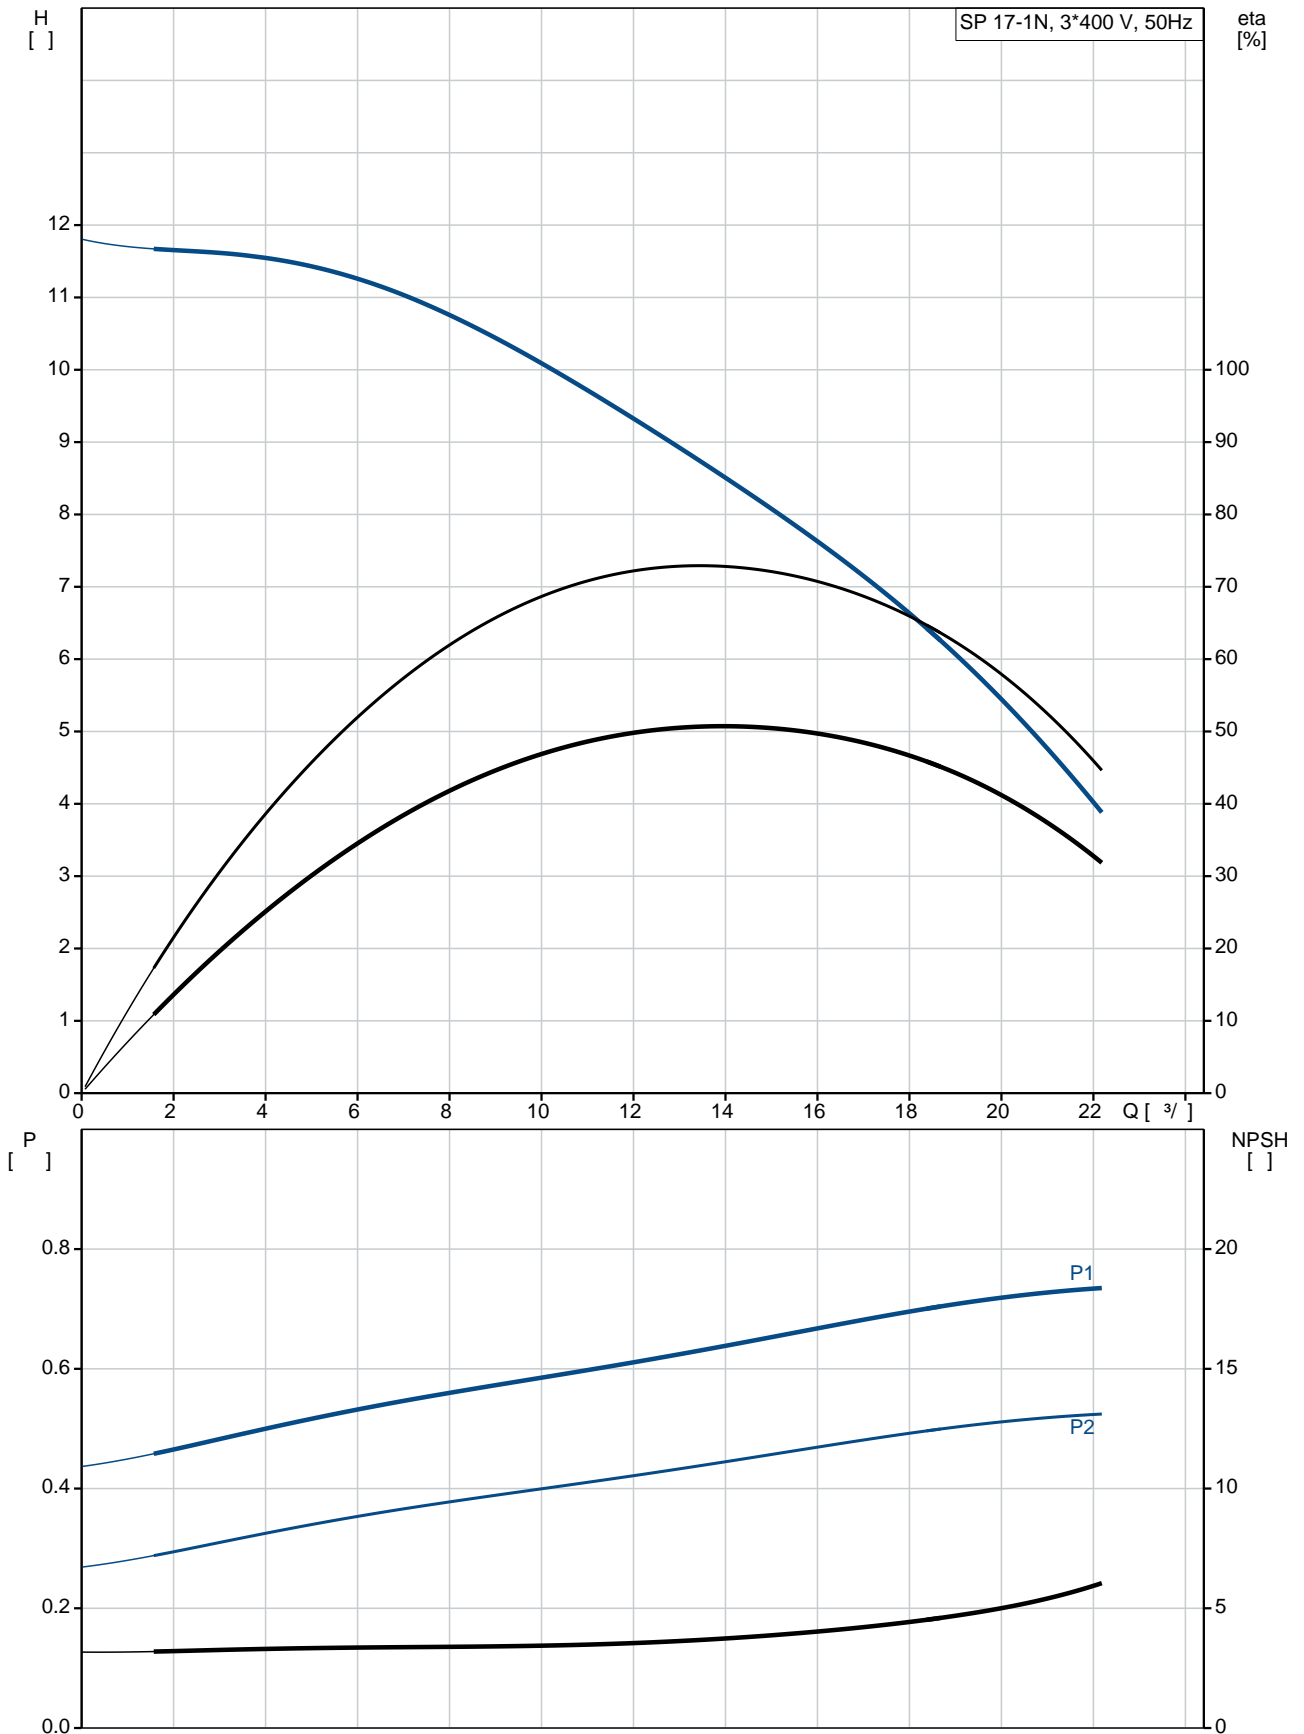


	SP 17-1N
	12C01901
EAN	5700391324536
	2900 /
	17 <sup>3</sup> /
	7
	1
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	B
	YES
	T40
	EN 1.4401
	AISI AISI 316
	EN 1.4401
	AISI AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	RP2 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / <sup>3</sup>
	MS4000
	GRUNDFOS
- P2:	0.75
( 2),	0.75
	50 Hz
	3 x 380-400-415
	1.92-1.84-1.84 A
	430-480-510 %
Cos	0.86-0.84-0.82
	2850-2870-2880 /
(IEC 34-5):	IP68
(IEC 85):	F
	79195604

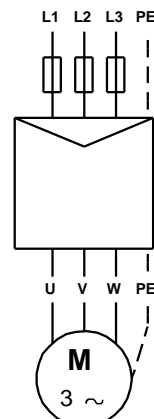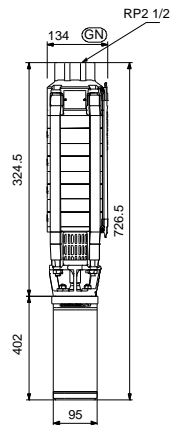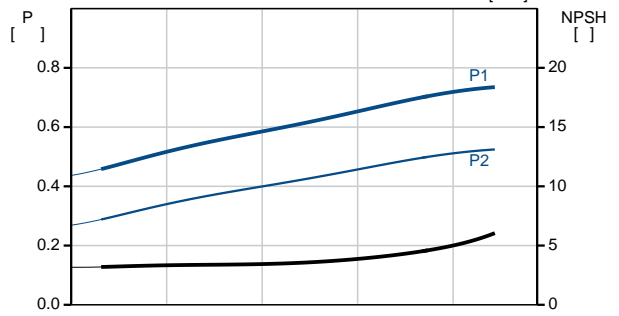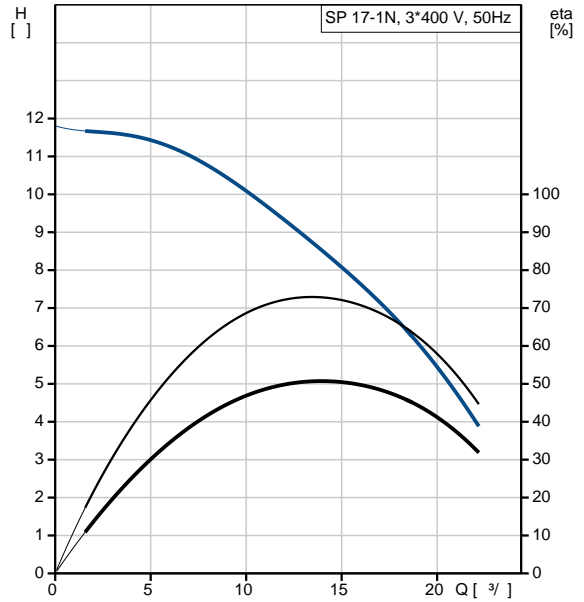


MEI :	0.70
ErP :	EuP / .
:	19.2
:	21.8
:	0.032 <sup>3</sup>

## 12C01901 SP 17-1N 50

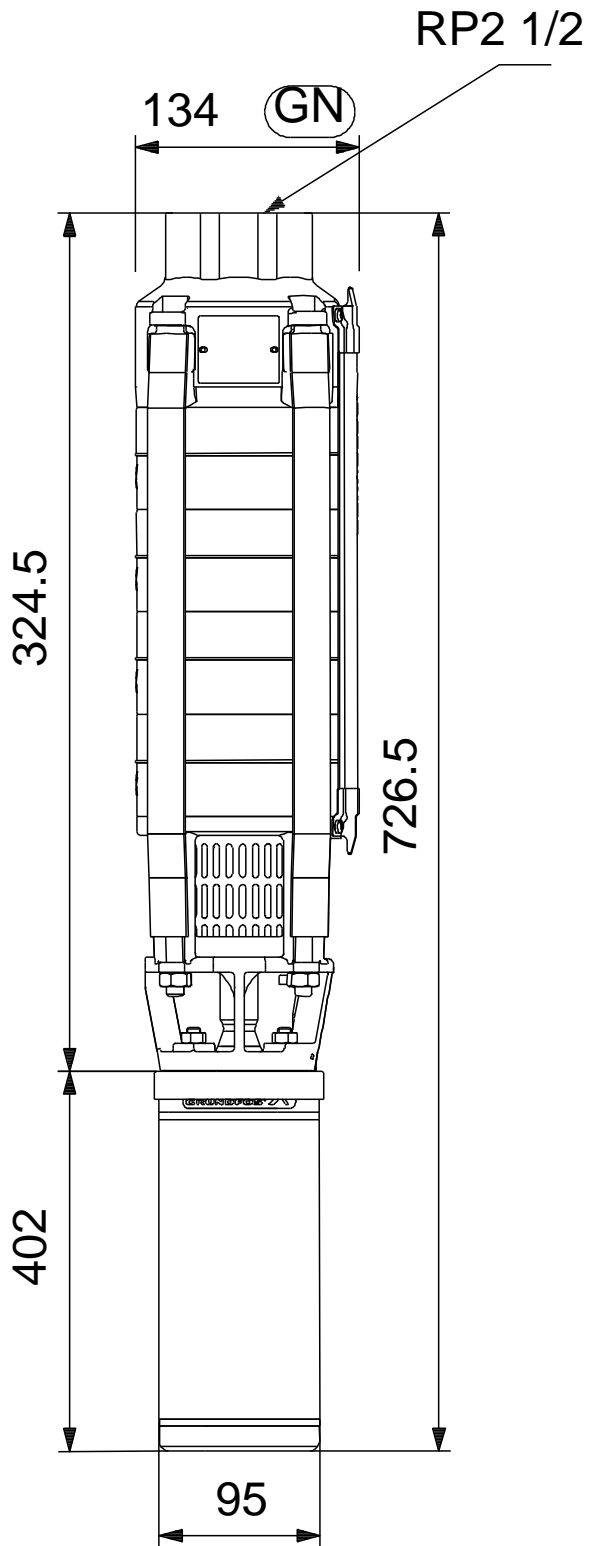

12C01901 SP 17-1N 50

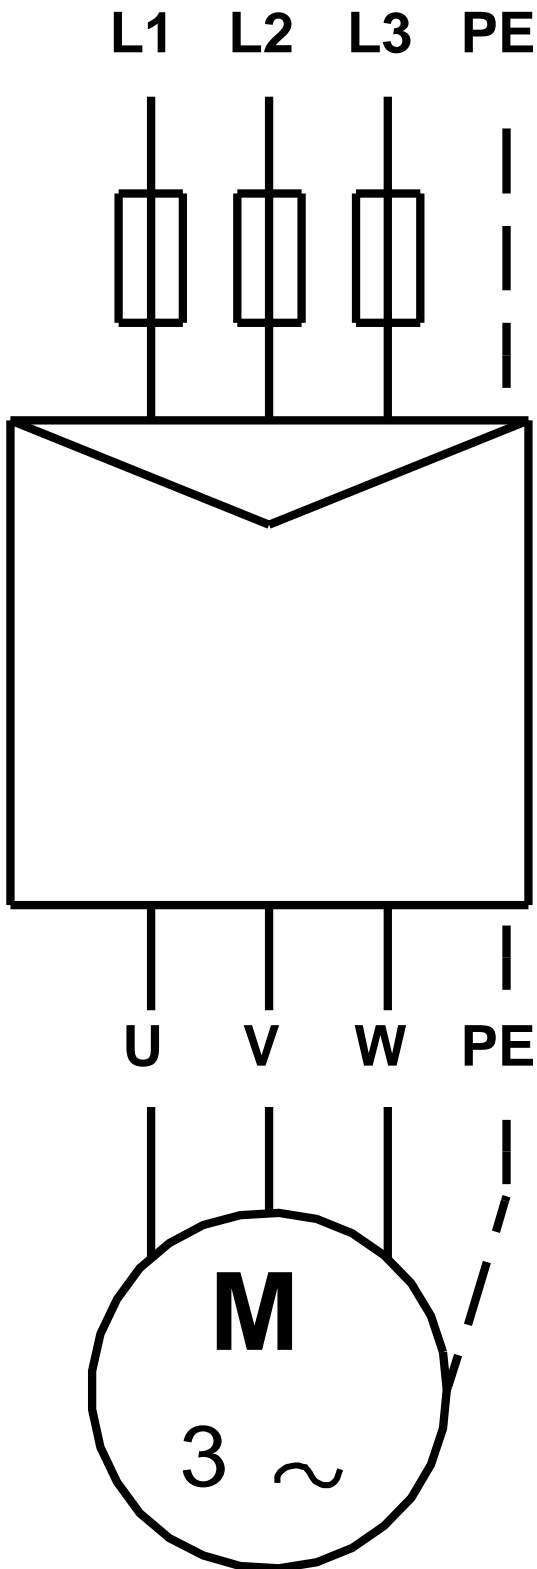

! [ ], .