

1 SP 17-1NE



: 12C91901

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

0,15 / : 40 °C

: 20 °C

998.2 / ³

: 2900 /

17 ³/

7

: SIC/SIC

- : ISO9906:2012 3B

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4401
AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

: Rp

: 2 1/2 inch


: 4 inch

:





MS4000

- P2: 0.75
: 50 Hz
: 3 x 380-400-415
: 1.92-1.84-1.84 A
Cos - : 0.86-0.84-0.82
: 2850-2870-2880 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195404
:
MEI : 0.70
:
: 17
: 18
: 0.02³
C : DK
: 8413702900

12C91901 SP 17-1NE 50

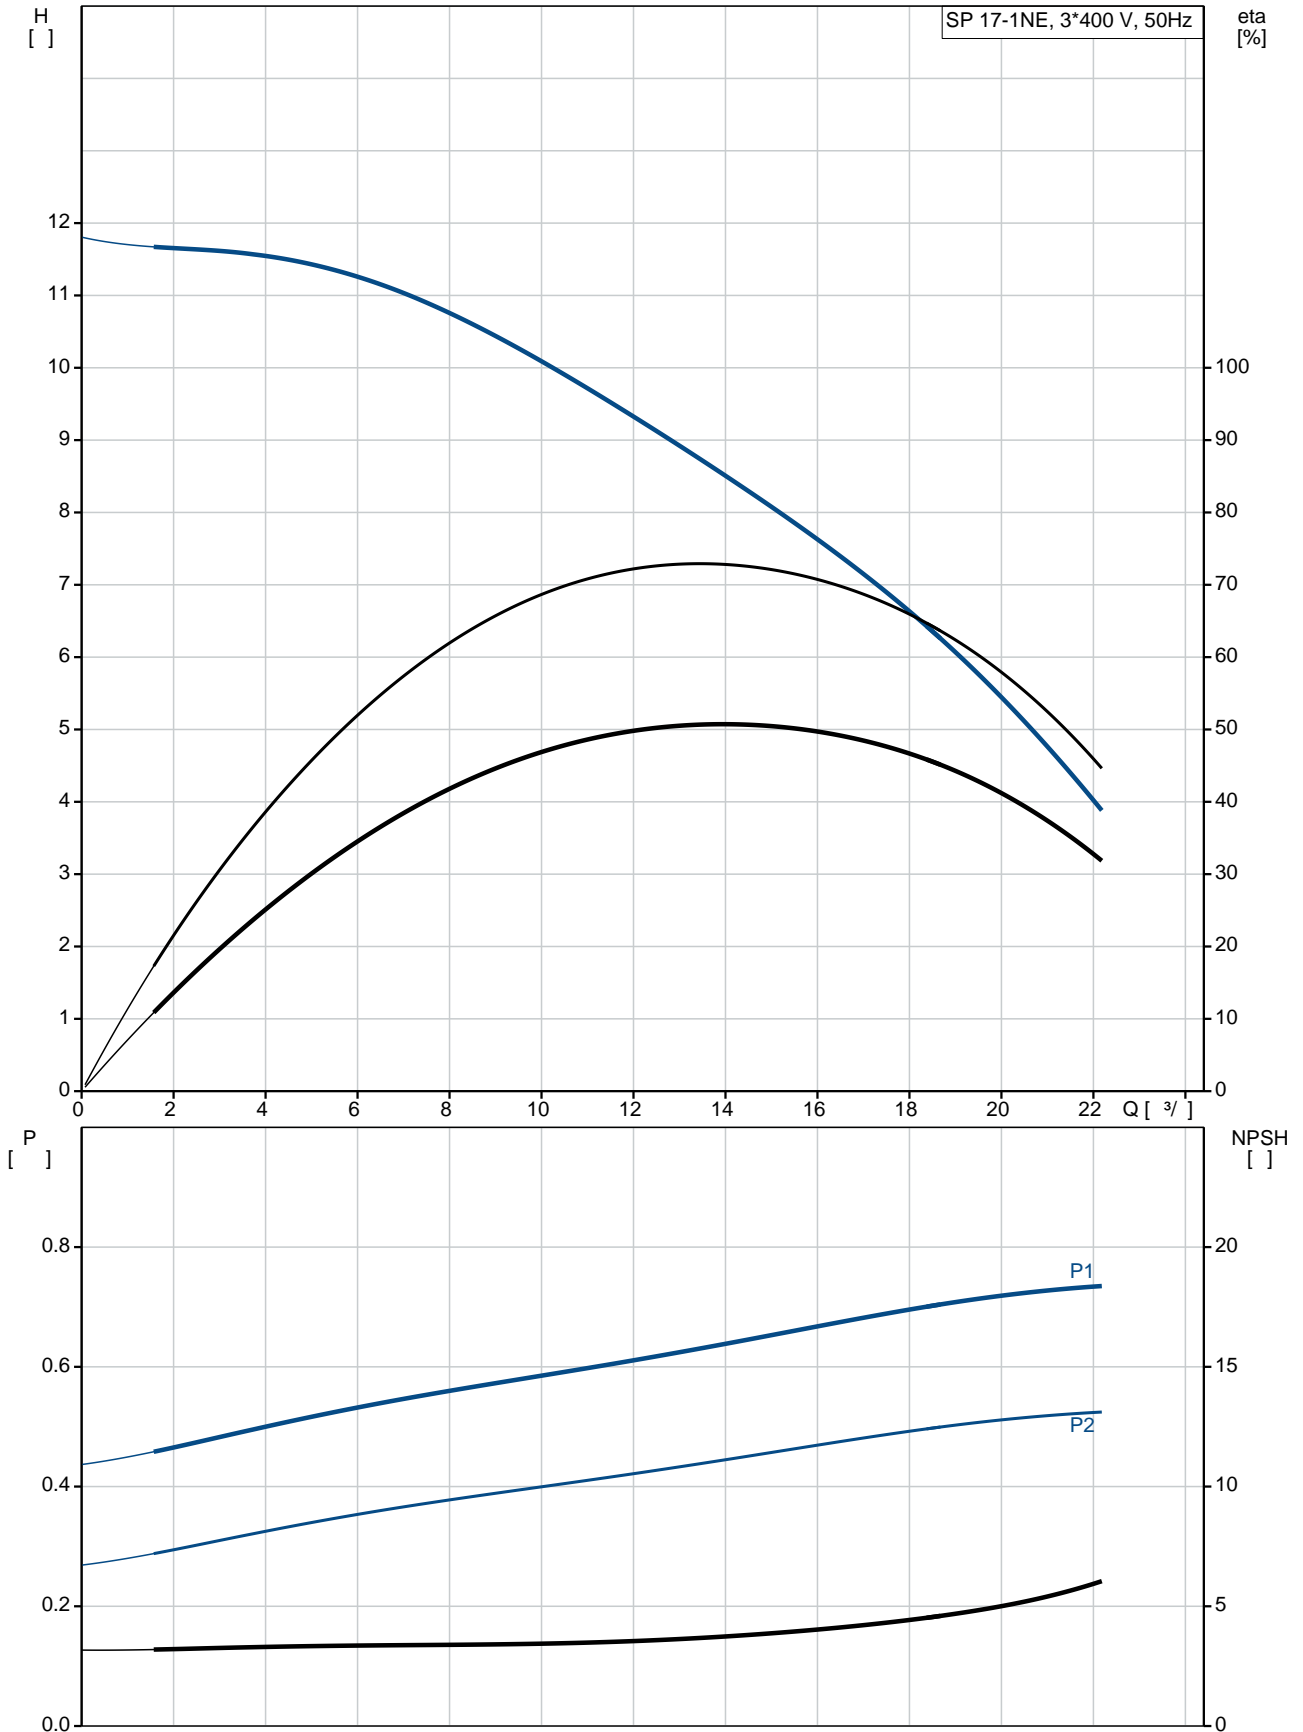


		SP 17-1NE
		12C91901
EAN		5700391344152
		2900 /
		17 ^{3/}
		7
		1
		SIC/SIC
		ISO9906:2012 3B
		A
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4539
		AISI 904 L
		Rp
		2 1/2 inch
		4 inch
t	0,15 /	40 °C
		20 °C
		998.2 / ³
		MS4000
	- P2:	0.75
		50 Hz
		3 x 380-400-415
		1.92-1.84-1.84 A
Cos	-	0.86-0.84-0.82
		2850-2870-2880 /
	(IEC 34-5):	IP68
	(IEC 85):	F
		79195404
MEI		0.70
		17
		18
		0.02 ³
C		DK

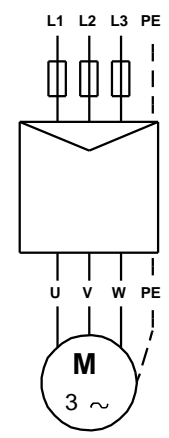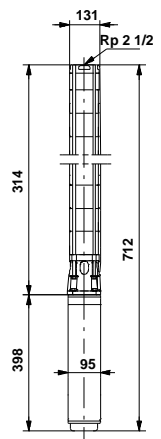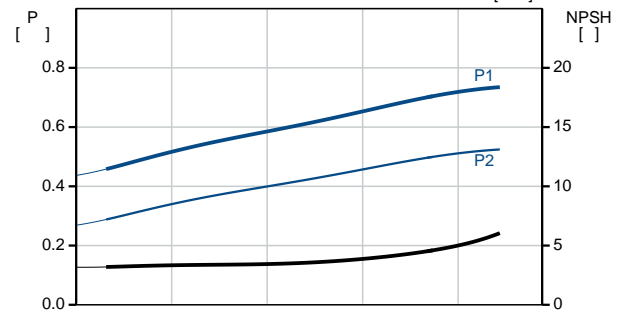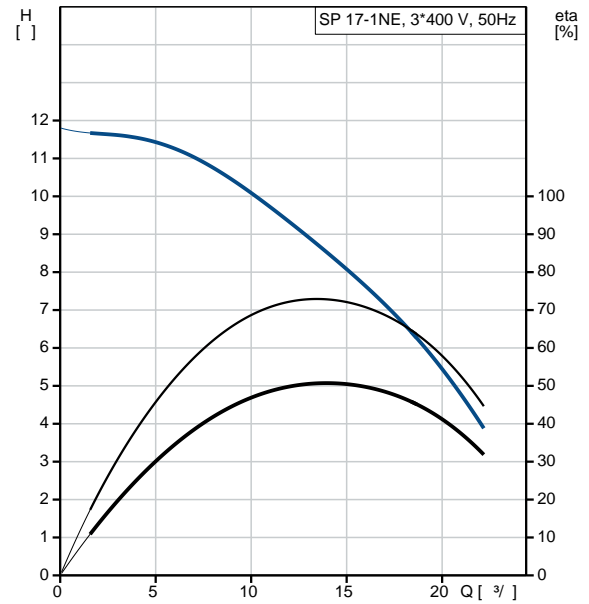




: 8413702900

12C91901 SP 17-1NE 50

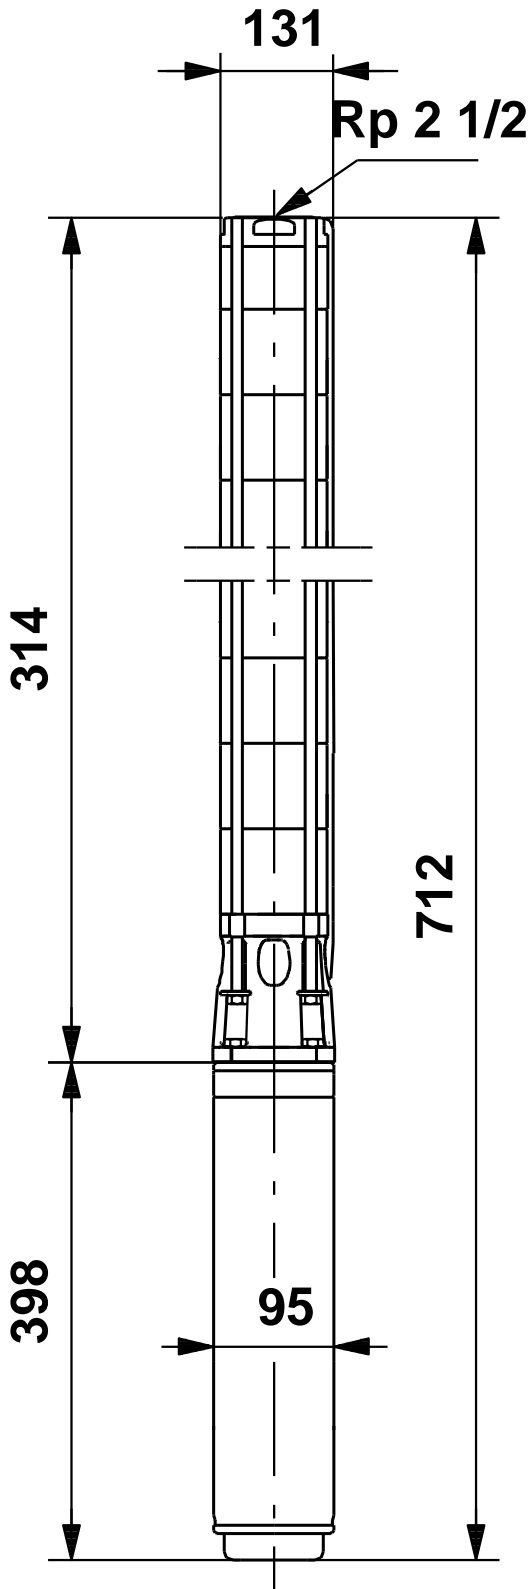

12C91901 SP 17-1NE 50

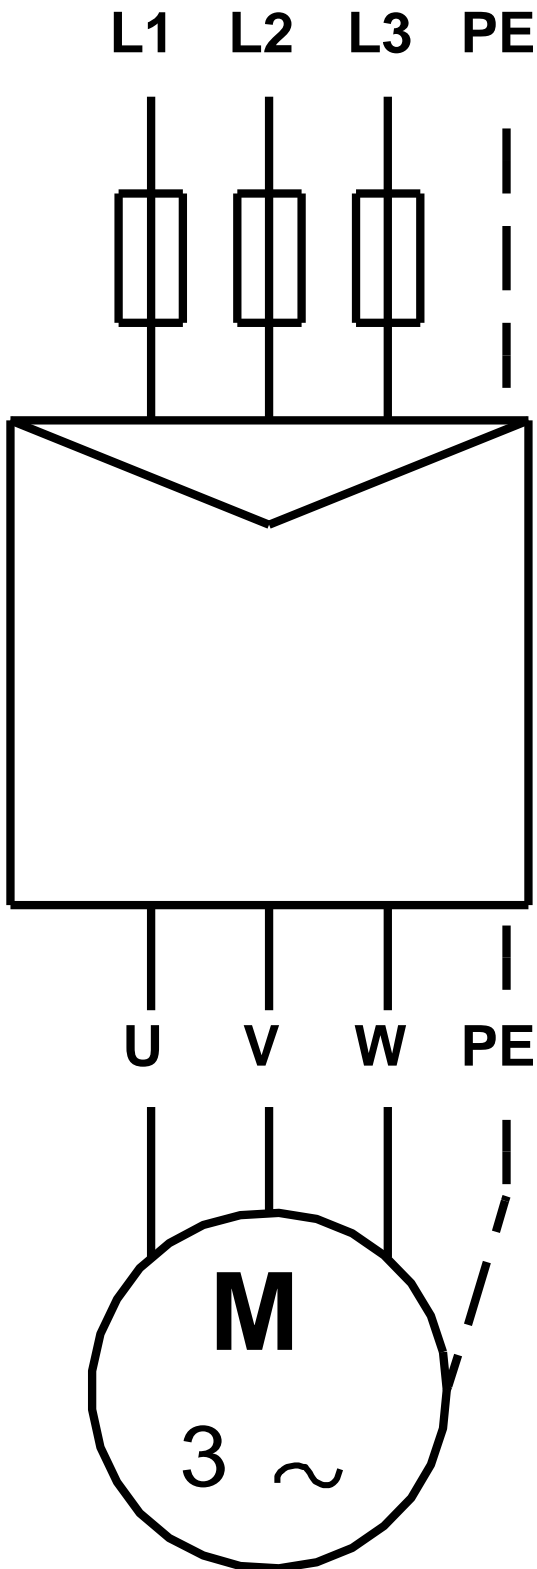

! [], .