

1 SP 17-2NE



: 12C91902

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

0,15 / : 40 °C

: 20 °C

998.2 / ³

: 2900 /

17 ³/

15

: SIC/SIC

- : ISO9906:2012 3B

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4539

AISI 904 L

: Rp

: 2 1/2 inch


: 4 inch

:





MS4000

- P2: 1.1
: 50 Hz
: 3 x 380-400-415
: 2.80-2.75-2.75 A
Cos - : 0.85-0.82-0.78
: 2850-2870-2880 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195405
:
: MEI : 0.70
:
: 20
: 21
: 0.02³
C : DK
: 8413702900

12C91902 SP 17-2NE 50

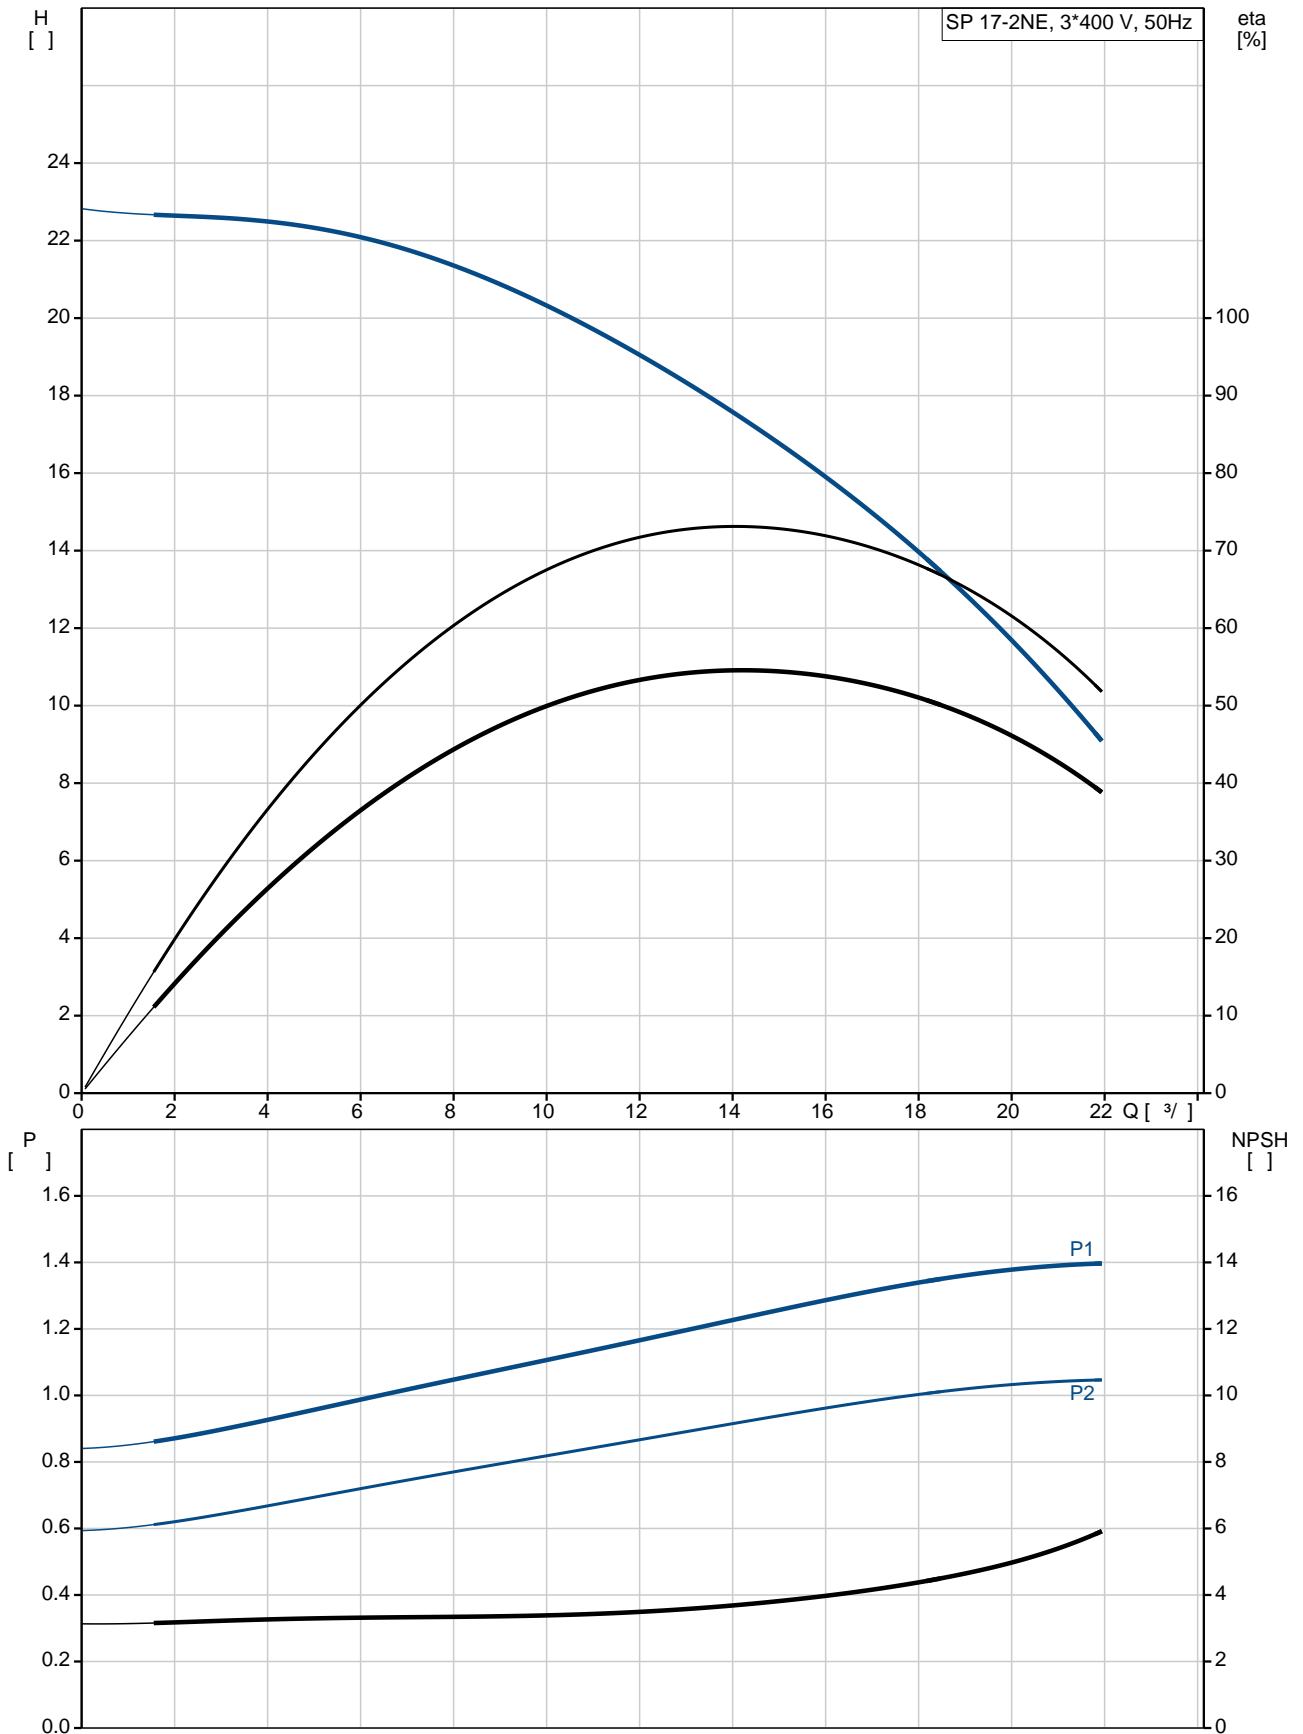

		SP 17-2NE
		12C91902
EAN		5700391344206
		2900 /
		17 ^{3/}
		15
		2
		SIC/SIC
		ISO9906:2012 3B
		A
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4401
		AISI 316
		DIN W.-Nr. 1.4539
		AISI 904 L
		Rp
		2 1/2 inch
		4 inch
t	0,15 /	40 °C
		20 °C
		998.2 / ³
		MS4000
	- P2:	1.1
		50 Hz
		3 x 380-400-415
		2.80-2.75-2.75 A
Cos		0.85-0.82-0.78
		2850-2870-2880 /
	(IEC 34-5):	IP68
	(IEC 85):	F
		79195405
MEI		0.70
		20
		21
		0.02 ³
C		DK

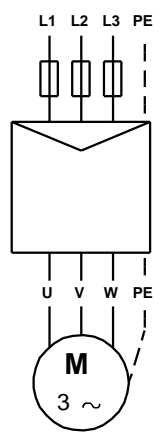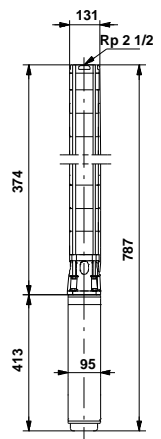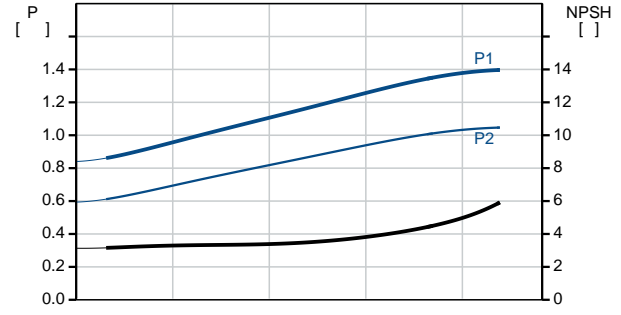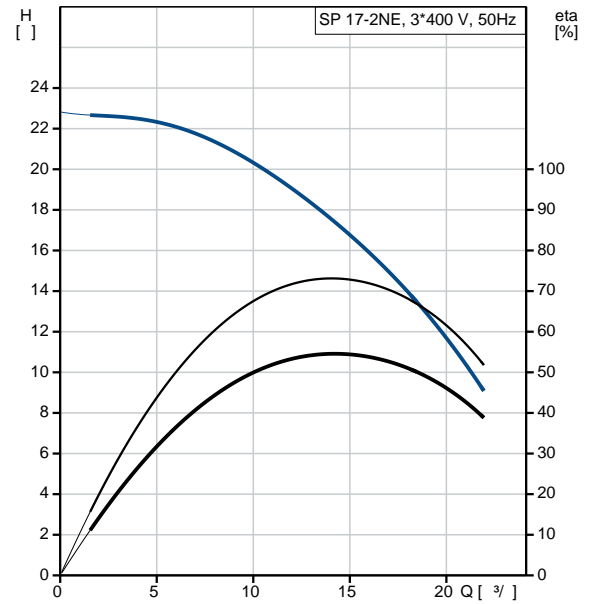




:

8413702900

12C91902 SP 17-2NE 50

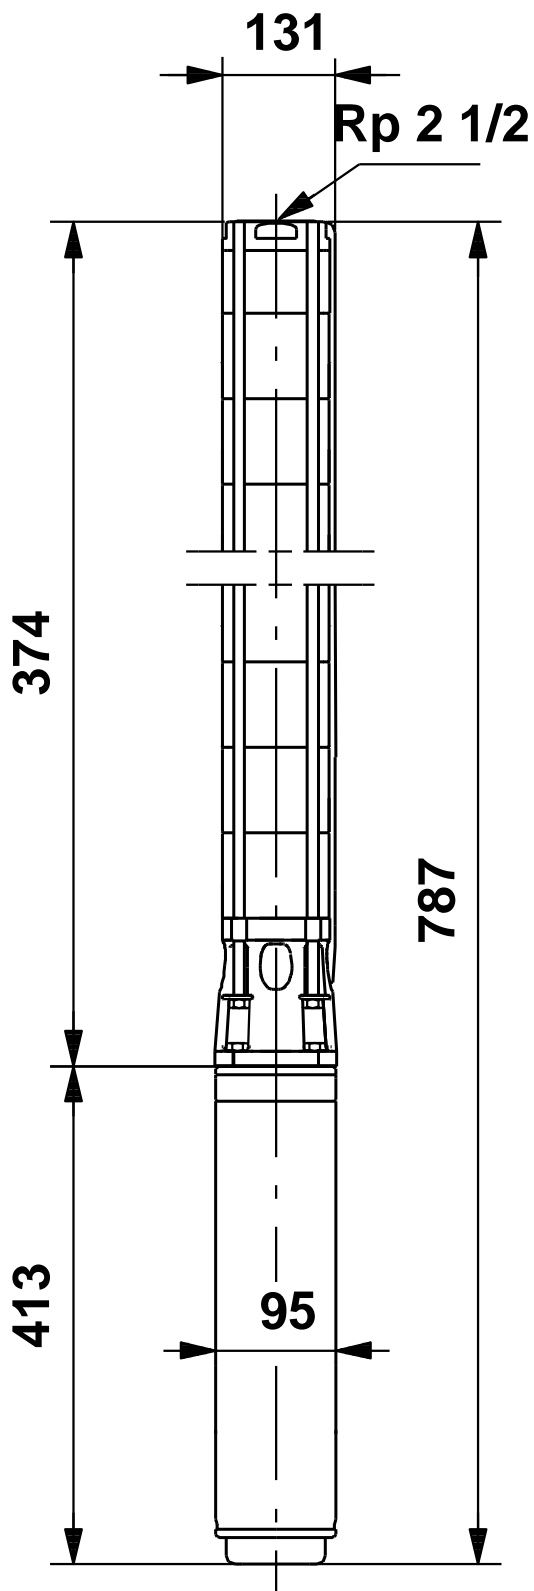

12C91902 SP 17-2NE 50



! [], .