

1 SP 17-4NE



: 12C91904

1.4401.

DIN W.-Nr. DIN W.-Nr.

3-

EPR, Teflon XLPE.

0,15 / : 40 °C

: 20 °C

998.2 / ³

: 2900 /

17 ³/

32

: SIC/SIC

- : ISO9906:2012 3B

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4401

AISI 316

DIN W.-Nr. 1.4539

AISI 904 L

: Rp

: 2 1/2 inch


: 4 inch

:





MS4000

- P2: 2.2
: 50 Hz
: 3 x 380-400-415
: 5.75-6.00-6.30 A
Cos - : 0.82-0.76-0.71
: 2840-2860-2870 /
:
(IEC 34-5): IP68
(IEC 85): F
:
: 79195407
:
MEI : 0.70
:
: 24
: 25
: 0.03 ³
C : DK
: 8413702900

12C91904 SP 17-4NE 50

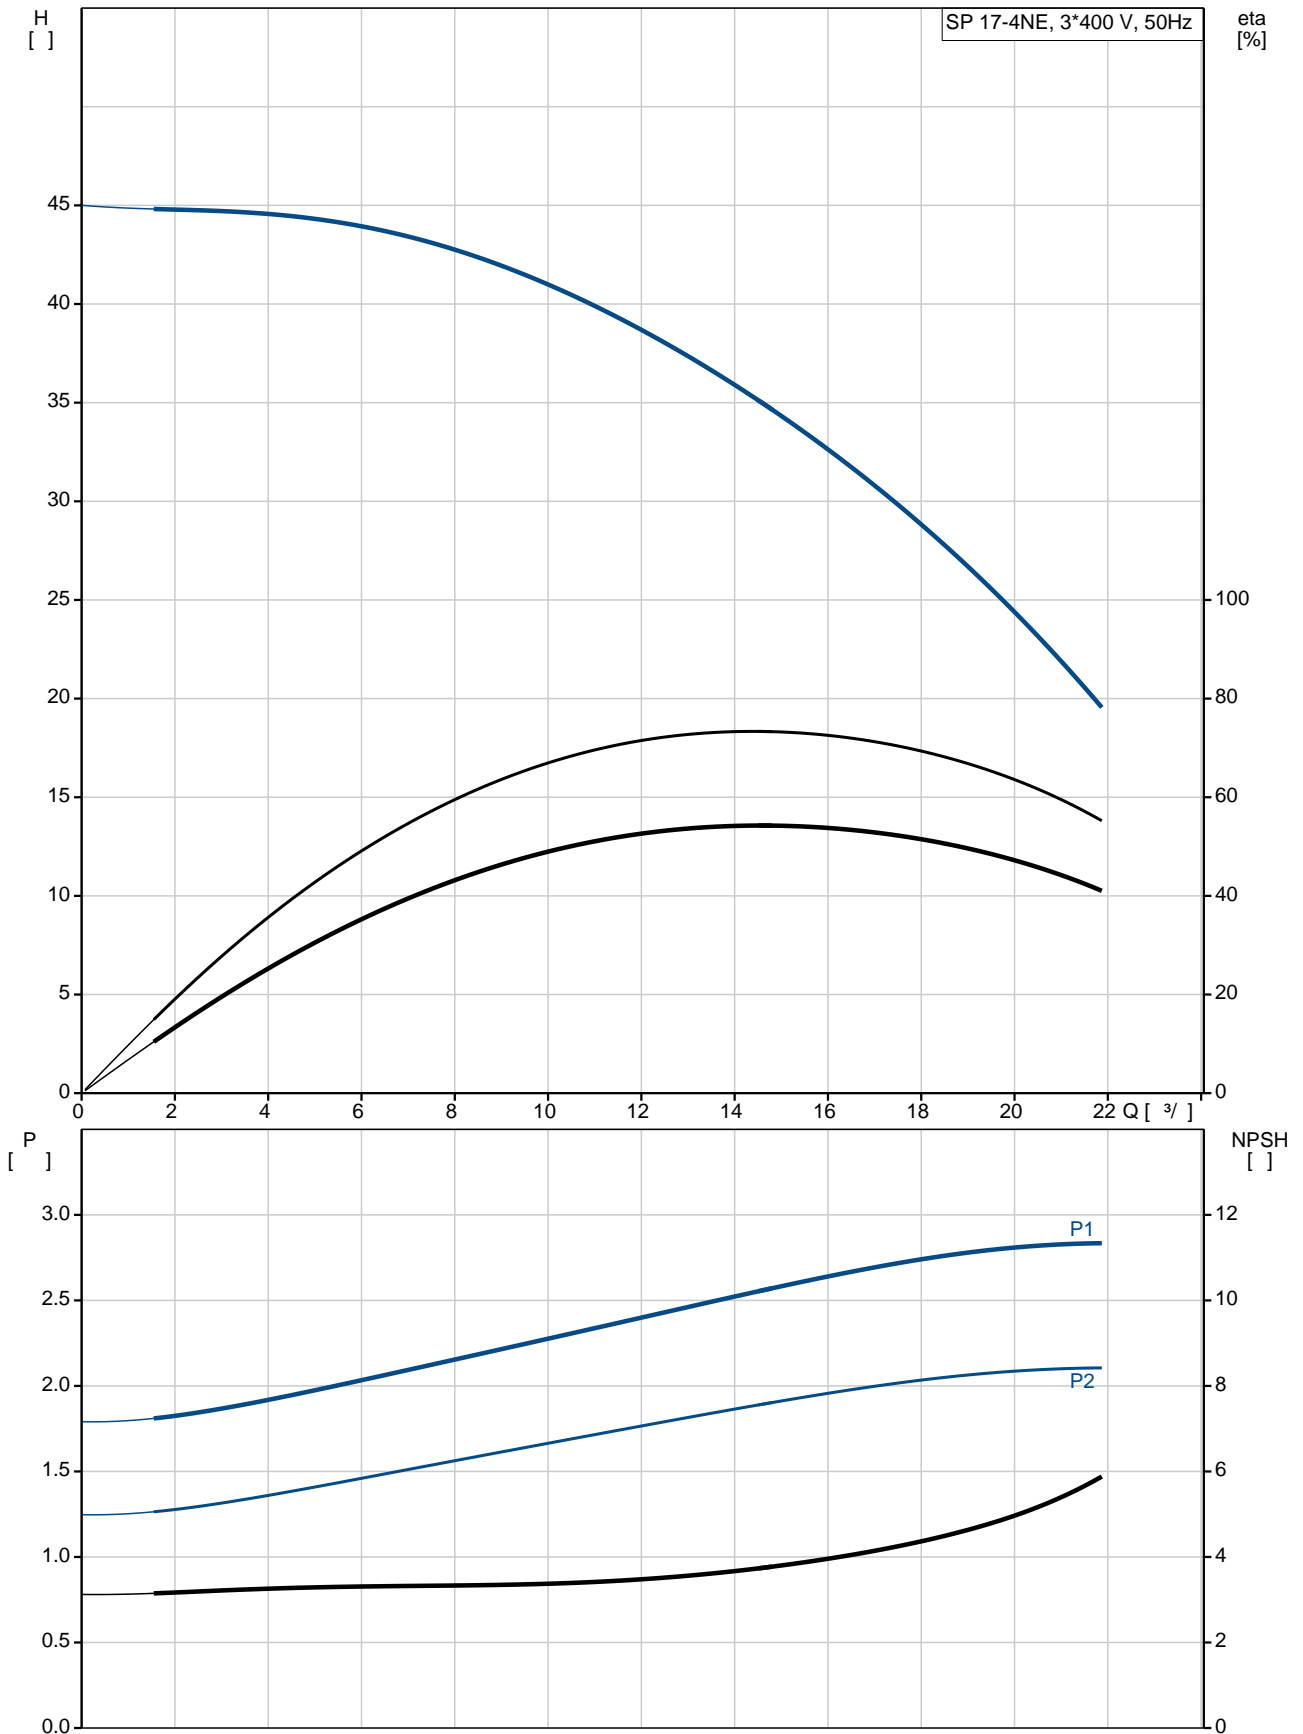


	SP 17-4NE
	12C91904
EAN	5700391344299
	2900 /
	17 ^{3/}
	32
	4
	SIC/SIC
	ISO9906:2012 3B
	A
	DIN W.-Nr. 1.4401
	AISI 316
	DIN W.-Nr. 1.4401
	AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp
	2 1/2 inch
	4 inch
t	0,15 /
	40 °C
	20 °C
	998.2 / ³
	MS4000
	- P2: 2.2
	50 Hz
	3 x 380-400-415
	5.75-6.00-6.30 A
Cos	0.82-0.76-0.71
	2840-2860-2870 /
	(IEC 34-5): IP68
	(IEC 85): F
	79195407
MEI	0.70
	24
	25
	0.03 ³
C	DK

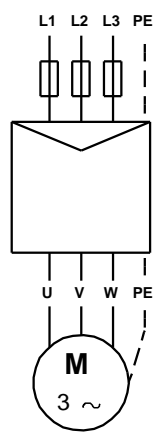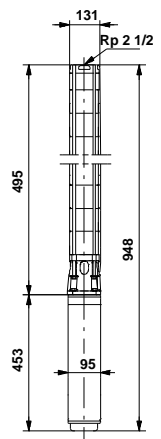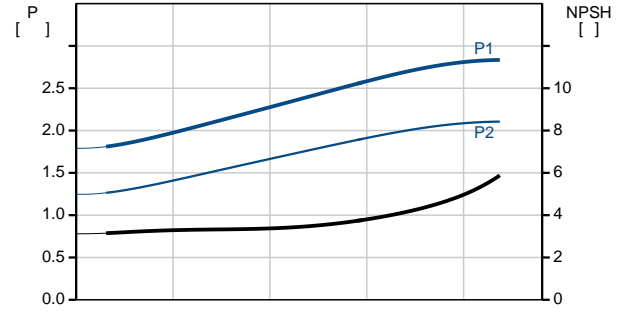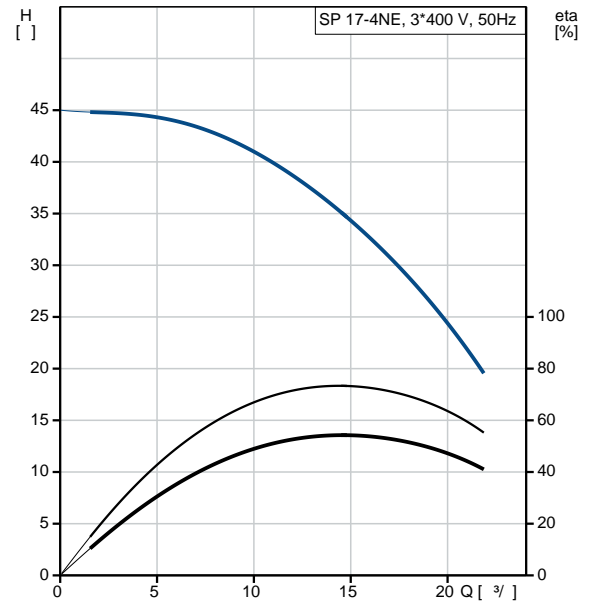




: 8413702900

12C91904 SP 17-4NE 50

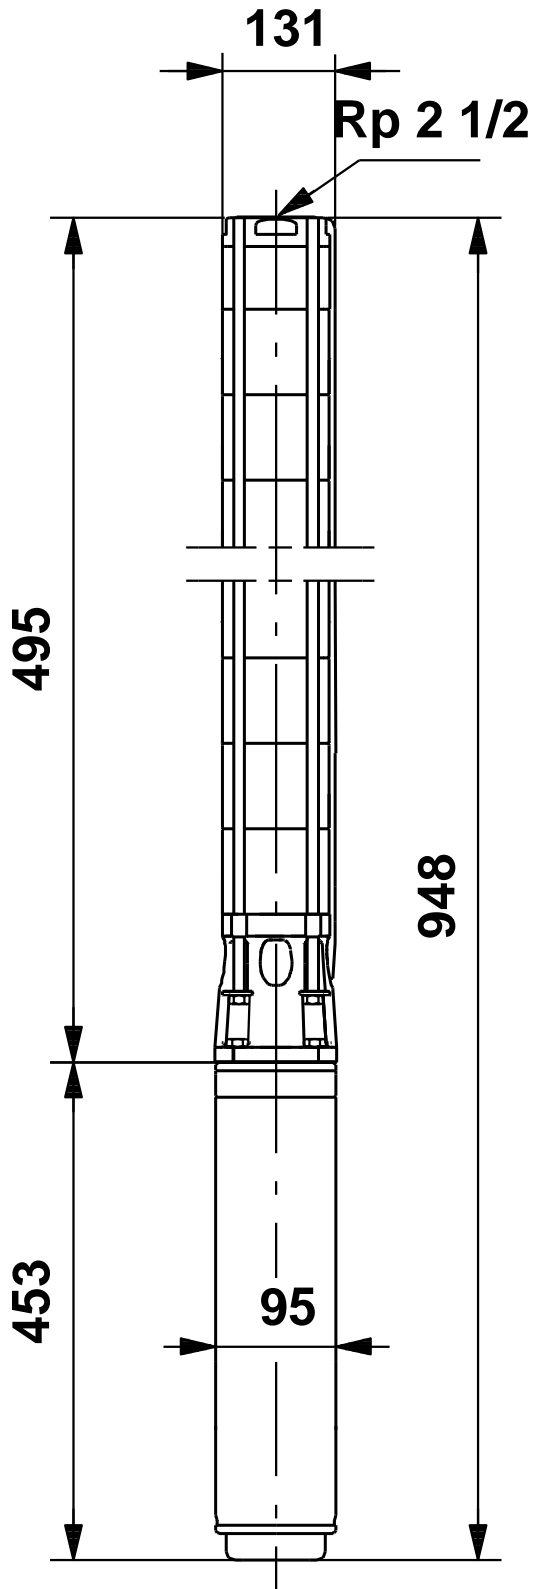

12C91904 SP 17-4NE 50

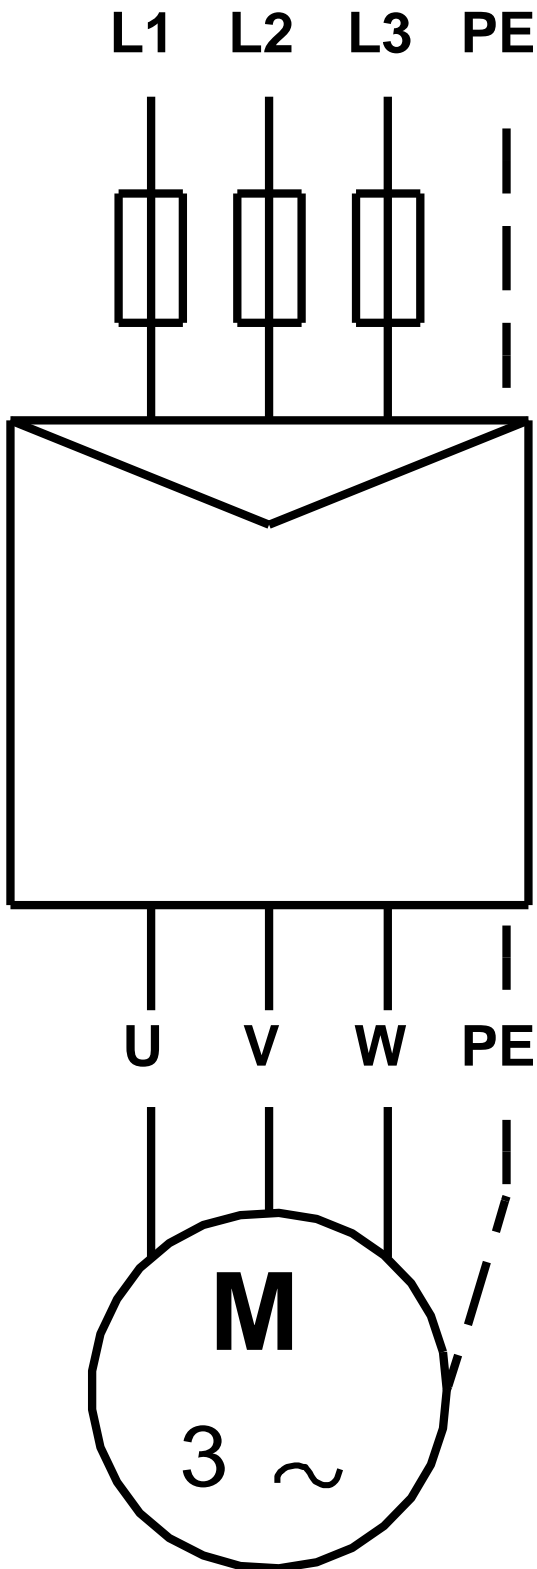

! [], .