

1 SP 30-5



: 13A01905

, EN 1.4301 (AISI 304),

MS40005.5

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 30 <sup>3</sup>/  
 : 38

: HM/CER  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4301  
 AISI AISI 304



EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: RP3  
 : 4 inch

MS4000  
- P2: 5.5  
( 2), : 5.5  
: 50 Hz  
: 3 x 380-400-415  
: 13.0-13.0-13.4 A  
: 480-530-550 %  
Cos - : 0.85-0.81-0.76  
: 2850-2860-2870 /  
:  
(IEC 34-5): IP68  
(IEC 85): F  
:  
: 79195511  
:  
ErP : MEI : 0.50  
: EuP /  
: 40.9  
: 66.1  
: 0.2<sup>3</sup>  
Danish VVS No.: 388338050  
C : DK  
: 8413702900

## 13A01905 SP 30-5 50

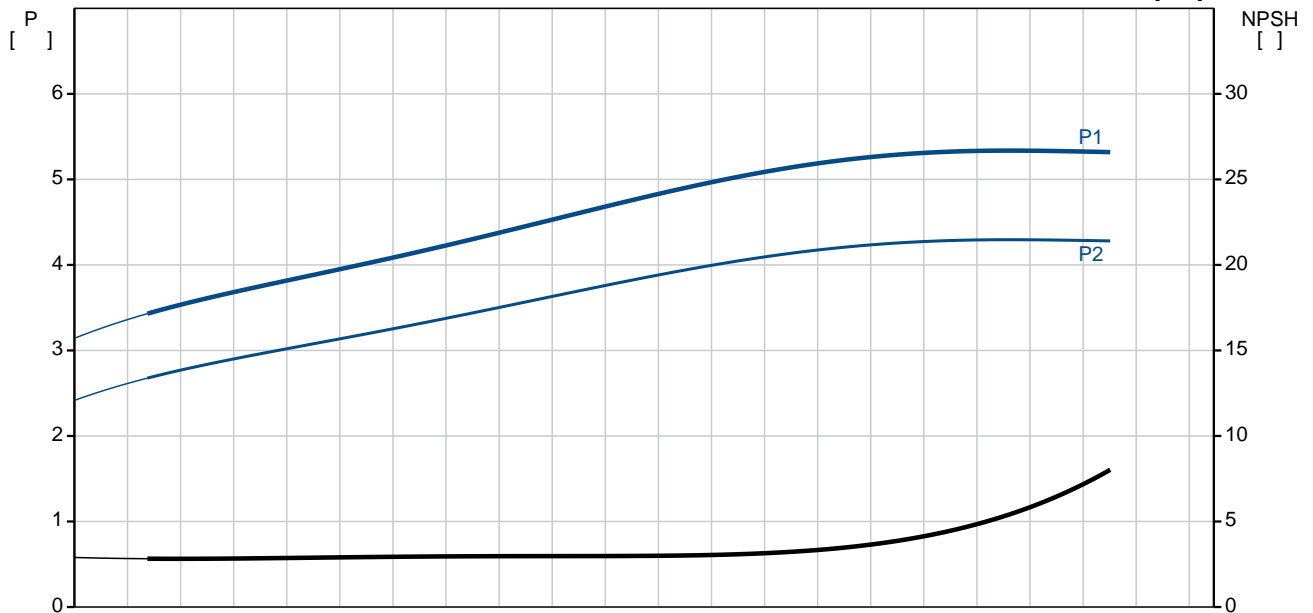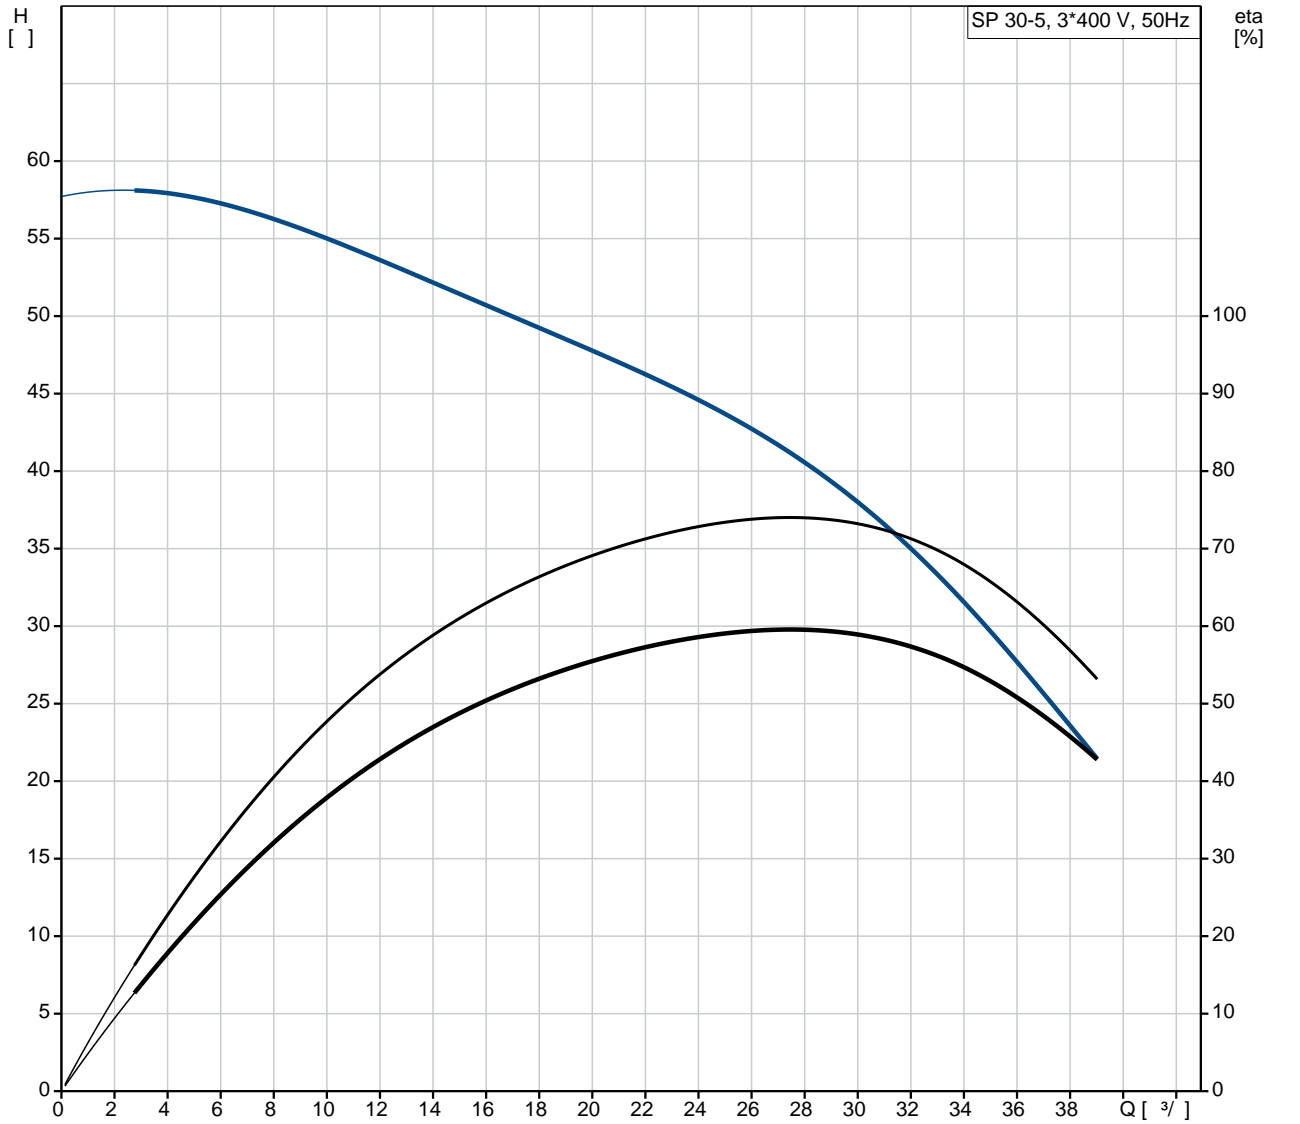

SP 30-5  
 13A01905  
 EAN : 5700391137747

2900 /  
 30 <sup>3/</sup>  
 38  
 5  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

RP3  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS4000  
 GRUNDFOS  
 - P2: 5.5  
 ( 2), 5.5

50 Hz  
 3 x 380-400-415  
 13.0-13.0-13.4 A  
 480-530-550 %  
 Cos - : 0.85-0.81-0.76  
 2850-2860-2870 /

(IEC 34-5): IP68  
 (IEC 85): F

79195511

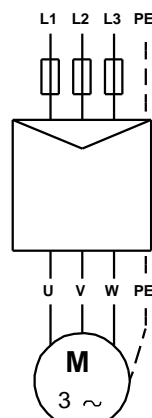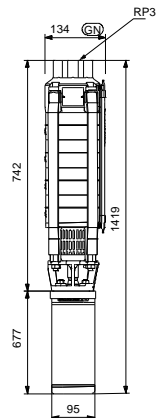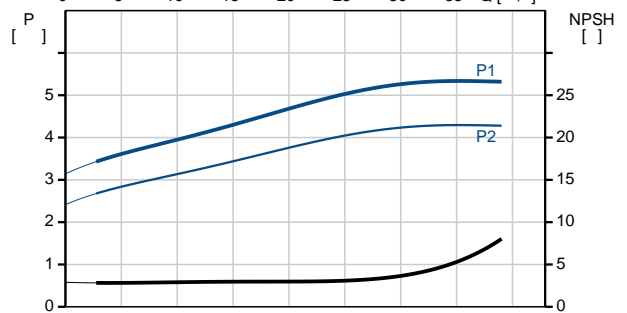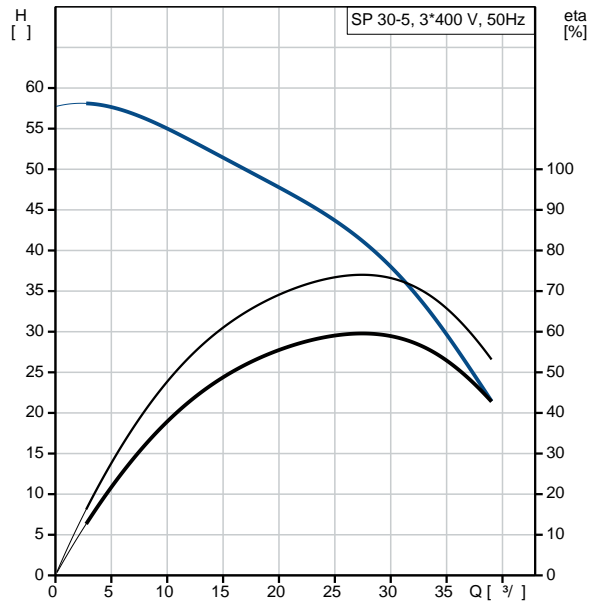

MEI :	0.50
ErP :	EuP / .
:	40.9
:	66.1
:	0.2 <sup>3</sup>
Danish VVS No.:	388338050
C :	DK
:	8413702900

## 13A01905 SP 30-5 50

