

1

SP 30-6



: 13A01906

, EN 1.4301 (AISI 304),

MS40005.5

40 °C.

MP204

Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
0,15 / : 40 °C
: 20 °C
998.2 / ³

: 2900 /

: 30 ³/
46
: HM/CER
: CE,EAC
- : ISO9906:2012 3B
: T40

EN 1.4301
AISI AISI 304


EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

RP3
: 4 inch

: MS4000
 - P2: 5.5
 (2), : 5.5
 : 50 Hz
 : 3 x 380-400-415
 : 13.0-13.0-13.4 A
 : 480-530-550 %
 Cos - : 0.85-0.81-0.76
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195511
 :
 MEI : 0.50
 ErP : EuP /
 : 42.8
 : 68
 : 0.2 ³
 Danish VVS No.: 388338060
 C : DK
 : 8413702900

13A01906 SP 30-6 50

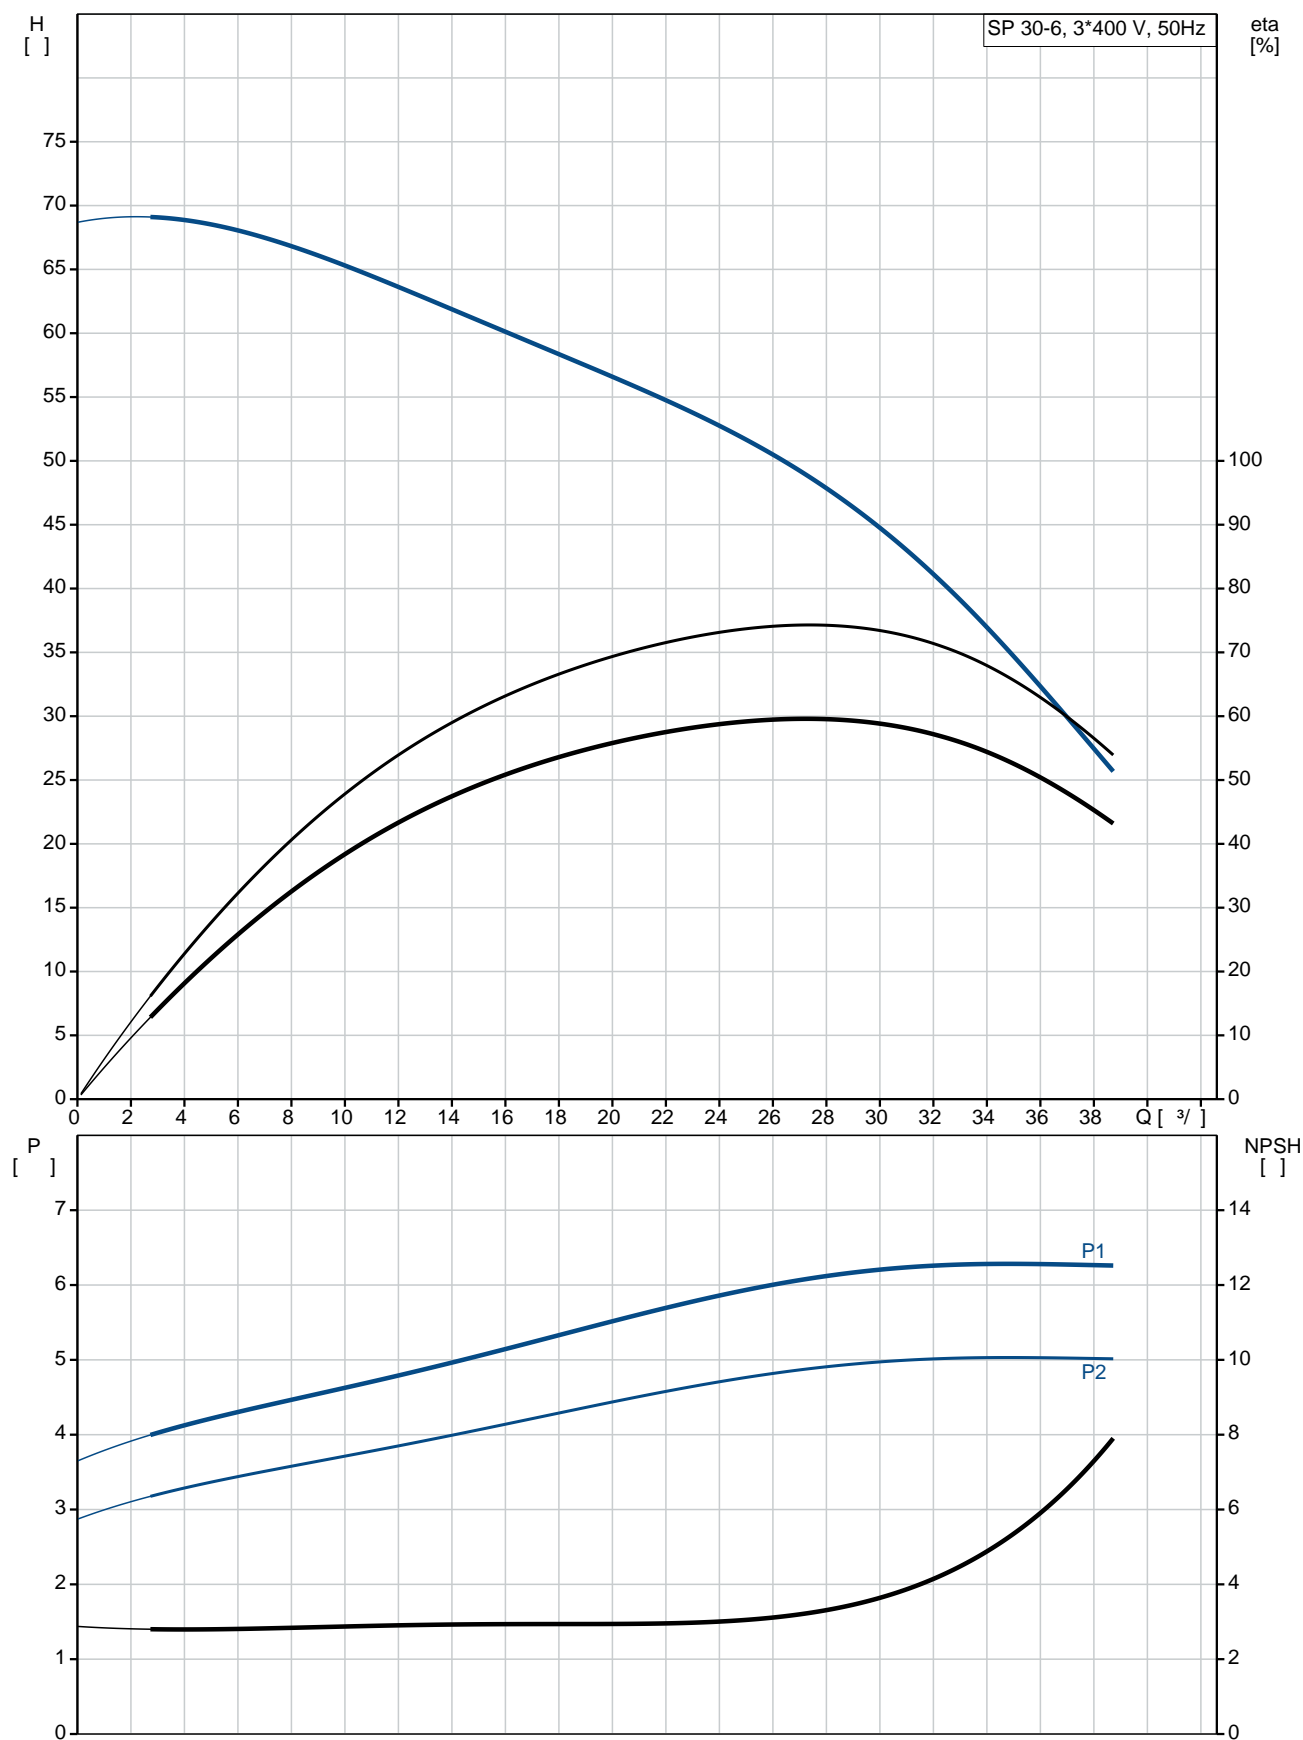

SP 30-6
13A01906
EAN : 5700390381103

2900 /
30 ³/₄
46
6
NONE
HM/CER
CE,EAC
ISO9906:2012 3B
B
YES
T40

EN 1.4301
AISI AISI 304

EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

RP3
4 inch





Maximum liquid temperature: 40 °C
t 0,15 / : 40 °C
20 °C
998.2 / ³

MS4000
GRUNDFOS
- P2: 5.5
(2), 5.5

50 Hz
3 x 380-400-415
13.0-13.0-13.4 A
480-530-550 %
Cos - : 0.85-0.81-0.76
2850-2860-2870 /

(IEC 34-5): IP68
(IEC 85): F

79195511

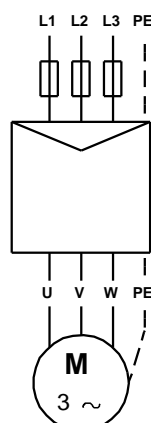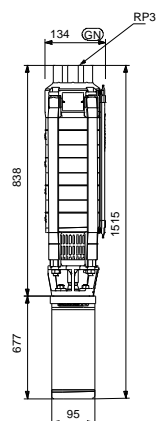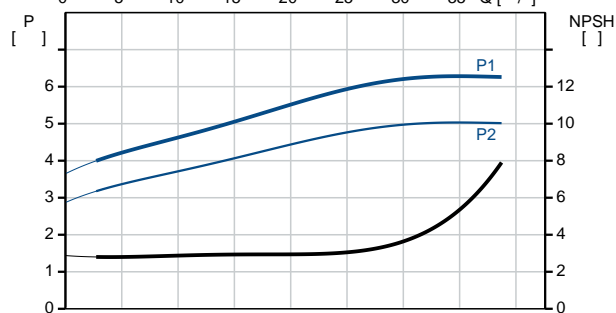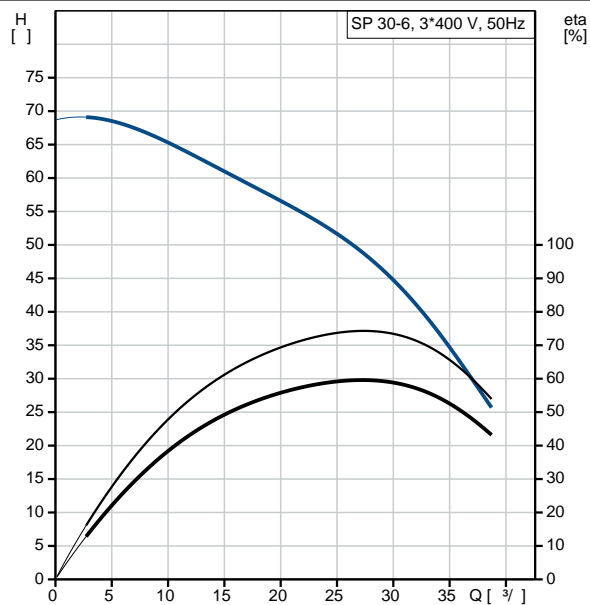

		MEI :	0.50
ErP :		EuP	/ .
:		42.8	
:		68	
:		0.2 ³	
Danish VVS No.:		388338060	
C :		DK	
:		8413702900	

13A01906 SP 30-6 50

