

1 SP 60-1-A



: 14A019A1

, EN 1.4301 (AISI 304),

MS4021.5

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

: 60 ³/₄

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301
AISI AISI 304


EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

RP4
: 4 inch

: MS402
 - P2: 1.5
 (2), : 1.5
 : 50 Hz
 : 3 x 380-400-415
 : 4.10-4.20-4.40 A
 : 490-500-500 %
 Cos - : 0.80-0.75-0.70
 : 2850-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): B
 :
 : 79192006
 :
 ErP : MEI : 0.40
 : EuP /
 : 18.6
 : 21.2
 : 0.032 ³
 Finnish LVI No.: 4762750
 C : DK
 : 8413702900

14A019A1 SP 60-1-A 50

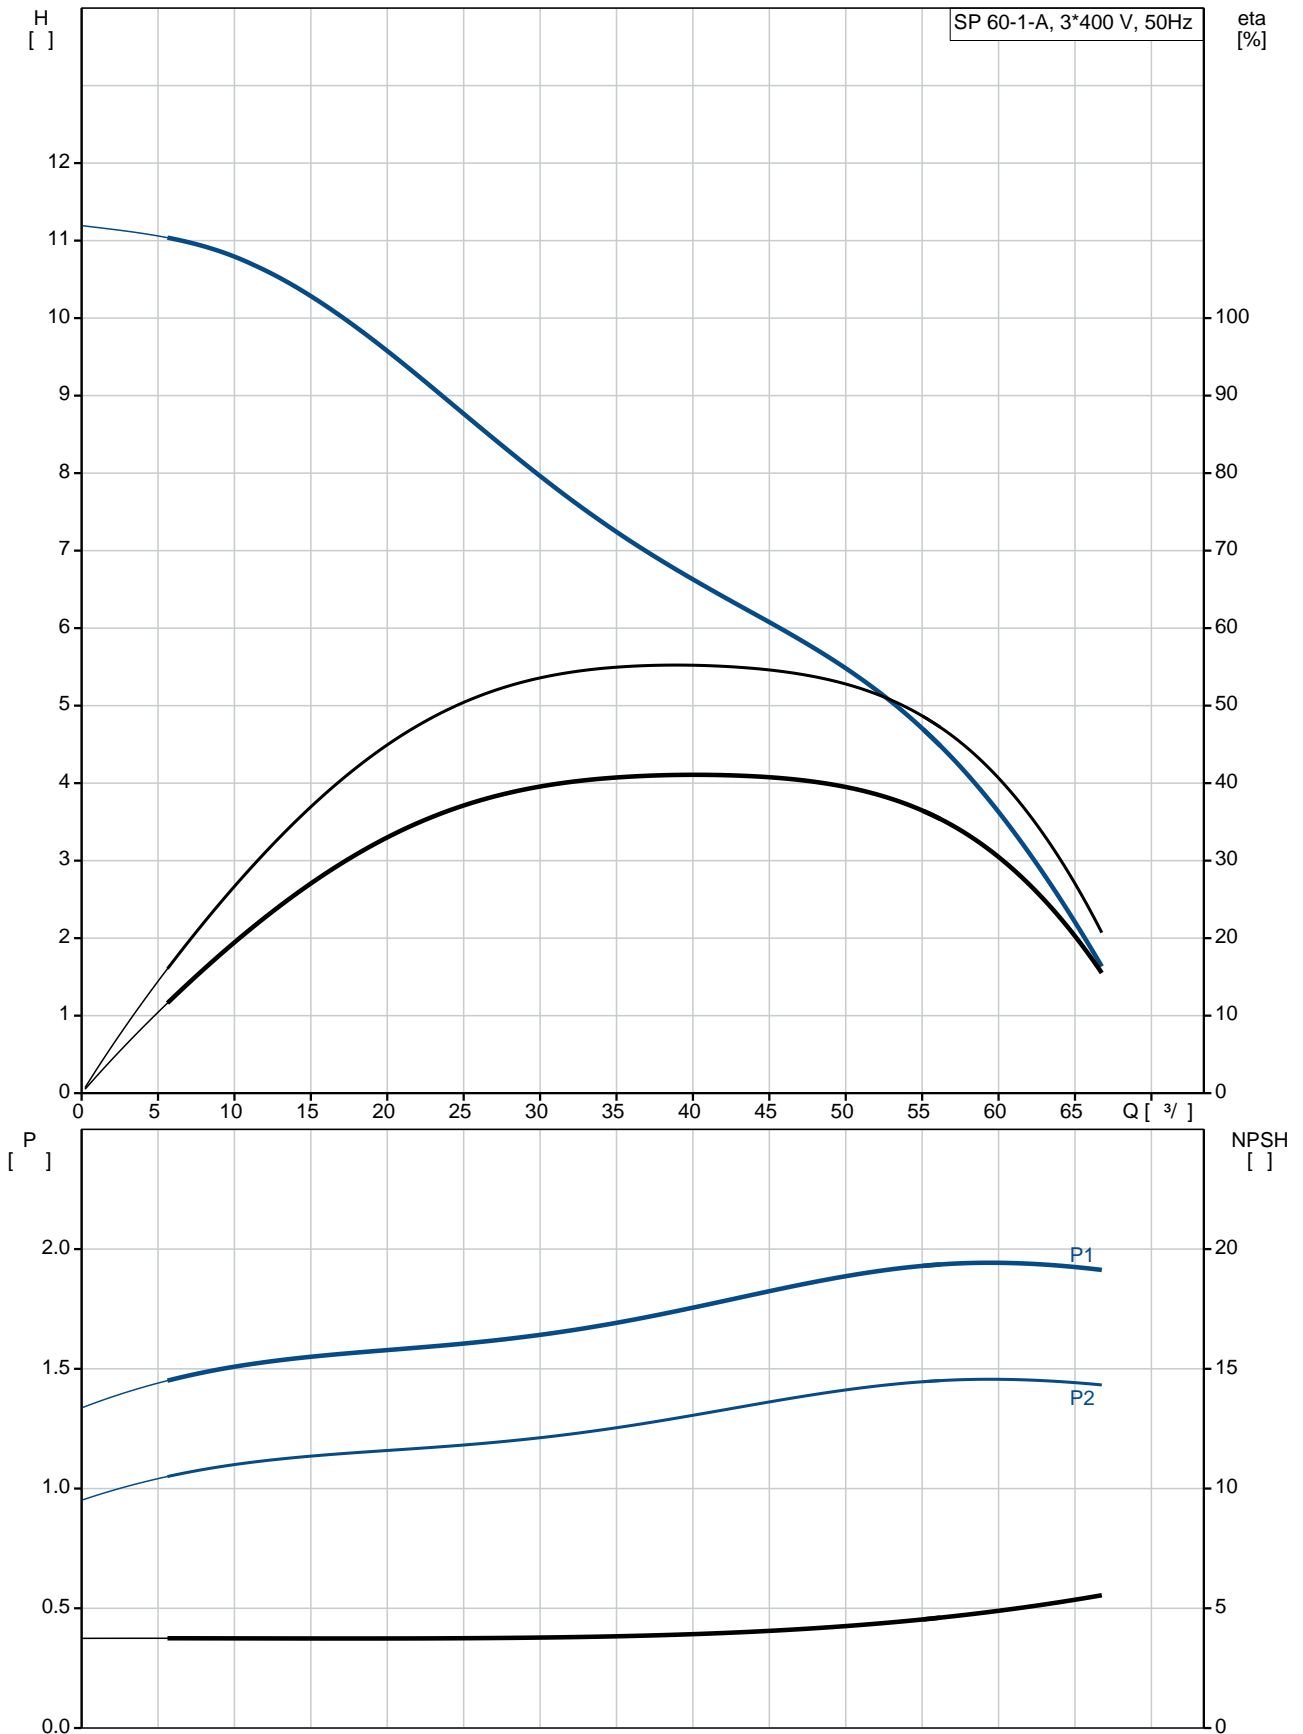

SP 60-1-A
 14A019A1
 EAN : 5700393575523

2900 /
 60 ^{3/}
 4
 1
 A
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 B
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

RP4
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / ³

MS402
 GRUNDFOS
 - P2: 1.5
 (2), 1.5

50 Hz
 3 x 380-400-415
 4.10-4.20-4.40 A
 490-500-500 %
 Cos - : 0.80-0.75-0.70
 2850-2860-2870 /


(IEC 34-5): IP68
 (IEC 85): B

79192006

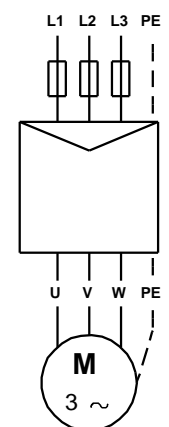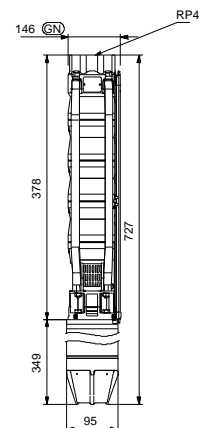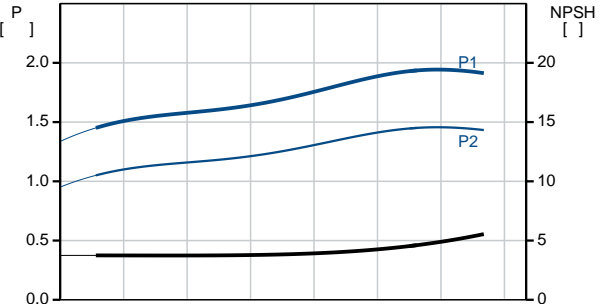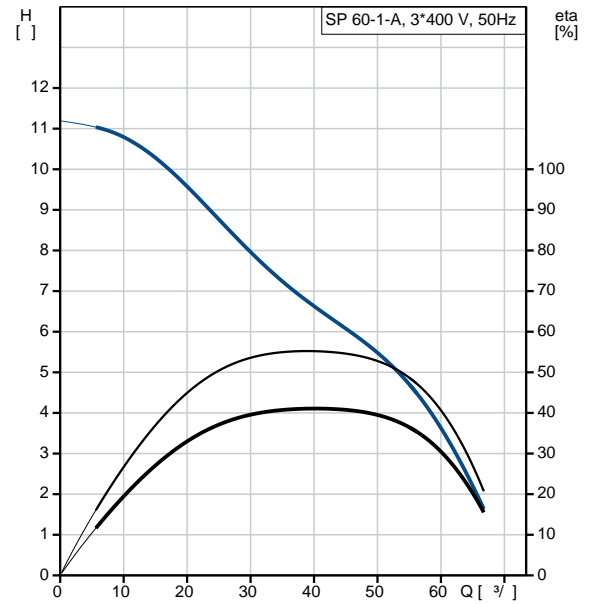


MEI :	0.40
ErP :	EuP / .
:	18.6
:	21.2
:	0.032 ³
Finnish LVI No.:	4762750
C :	DK
:	8413702900

14A019A1 SP 60-1-A 50

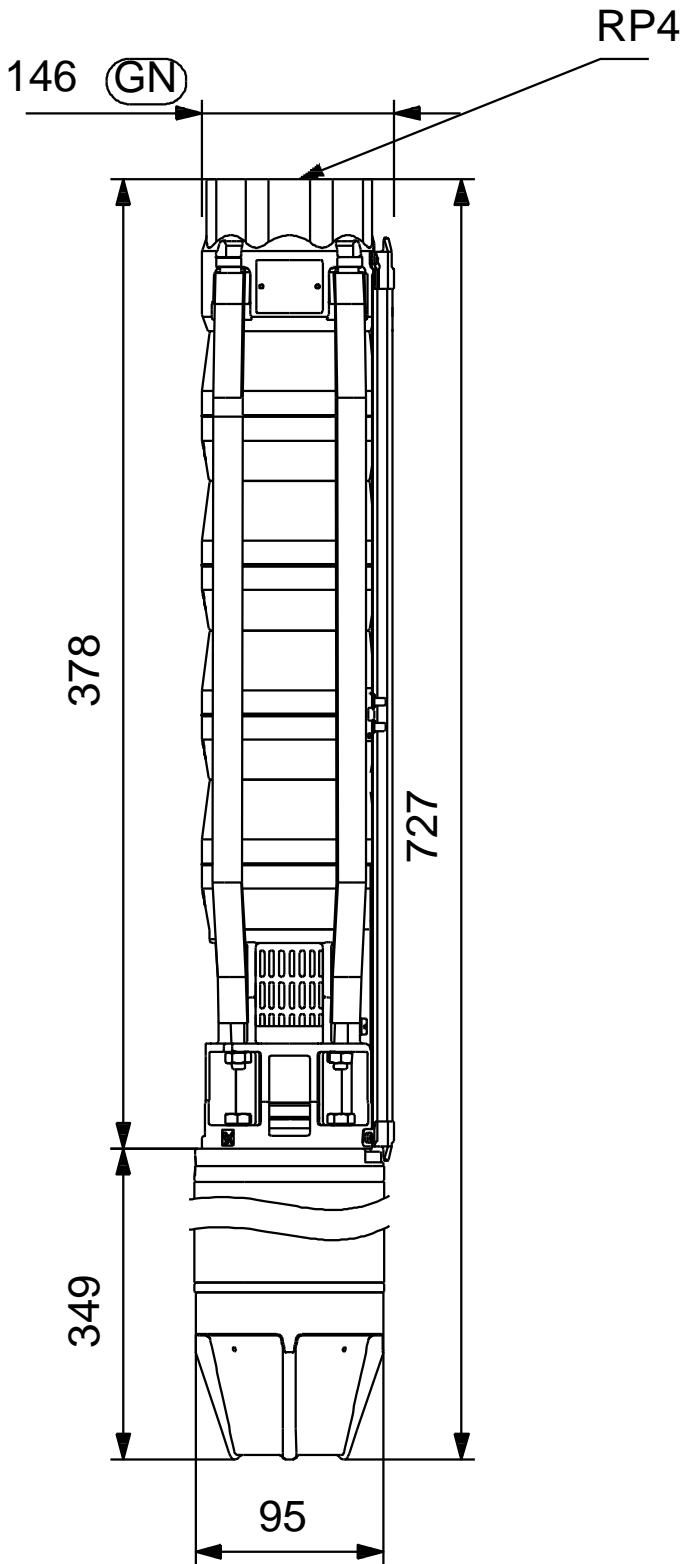

14A019A1 SP 60-1-A 50

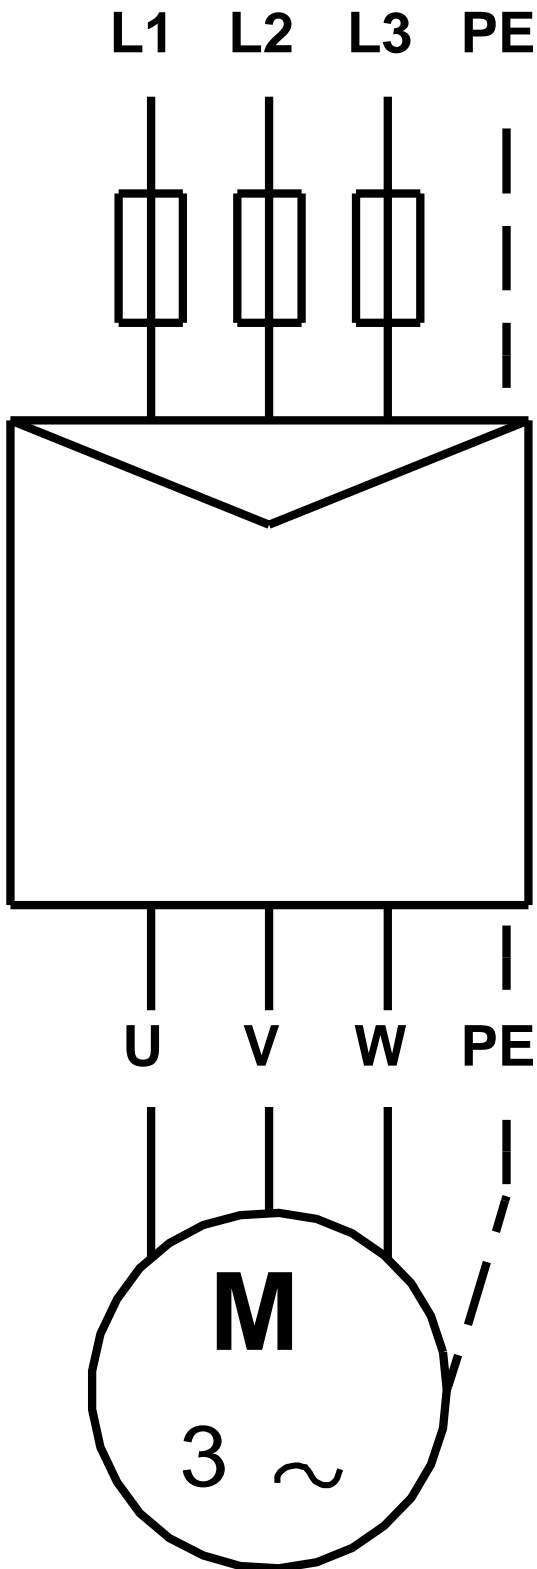

!

[],