

1 SP 60-3



: 14A21903

, EN 1.4301 (AISI 304),

MS40005.5

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 60 <sup>3</sup>/  
 : 22

: HM/CER  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4301  
 AISI AISI 304


EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: RP3  
 : 4 inch

: MS4000  
 - P2: 5.5  
 ( 2), : 5.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 13.0-13.0-13.4 A  
 : 480-530-550 %  
 Cos - : 0.85-0.81-0.76  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195511  
 :  
 ErP : MEI : 0.40  
 : EuP /  
 : 38.9  
 : 43.3  
 : 0.052 <sup>3</sup>

## 14A21903 SP 60-3 50

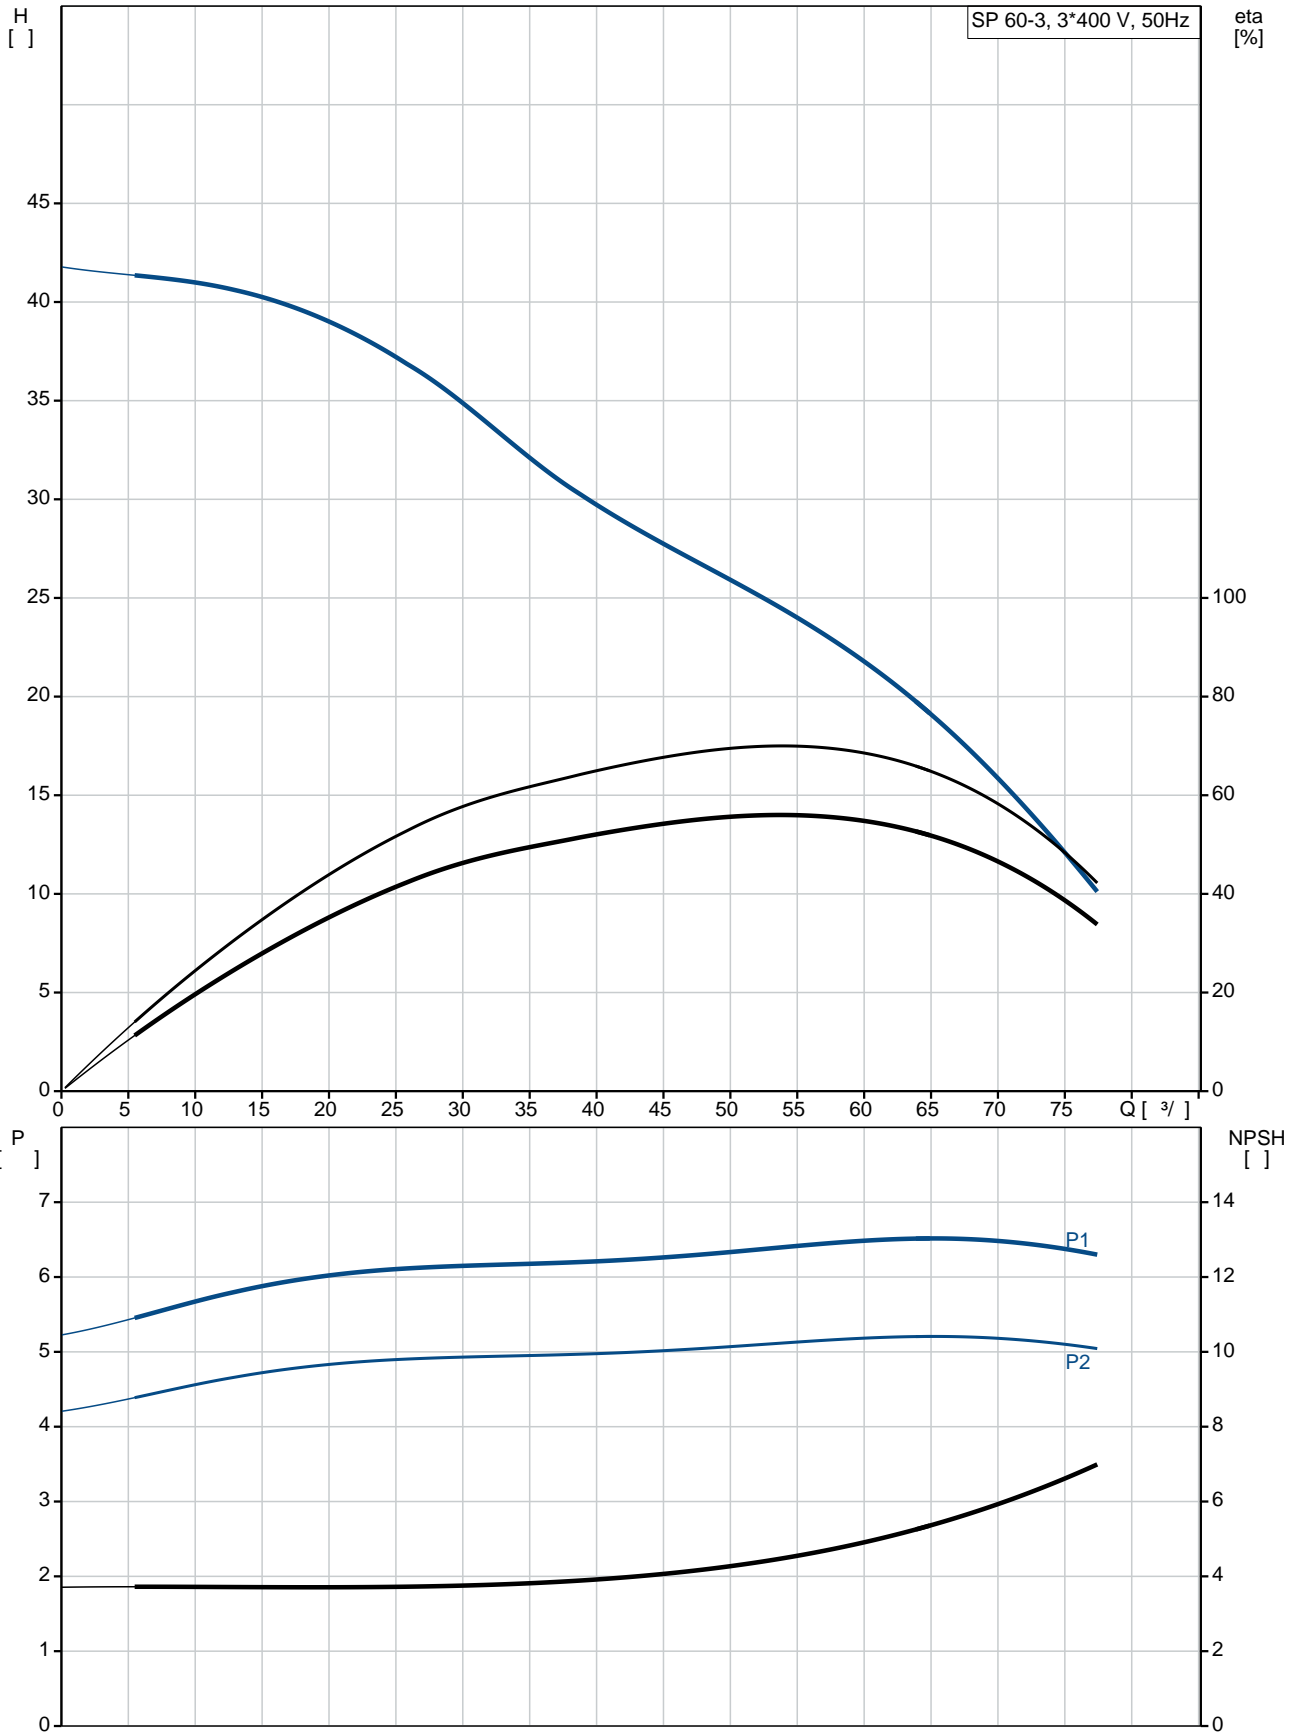

SP 60-3  
 14A21903  
 EAN : 5700391141676

2900 /  
 60 <sup>3</sup>/<sub>l</sub>  
 22  
 3  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

RP3  
 4 inch

Maximum liquid temperature: 40 °C

0,15 / : 40 °C

20 °C

998.2 / <sup>3</sup>

MS4000  
 GRUNDFOS

- P2: 5.5

( 2), 5.5

50 Hz  
 3 x 380-400-415

13.0-13.0-13.4 A

Cos : 480-530-550 %





0.85-0.81-0.76

2850-2860-2870 /

(IEC 34-5): IP68


(IEC 85): F

79195511

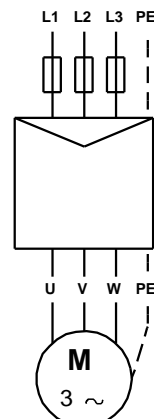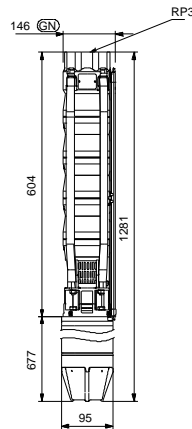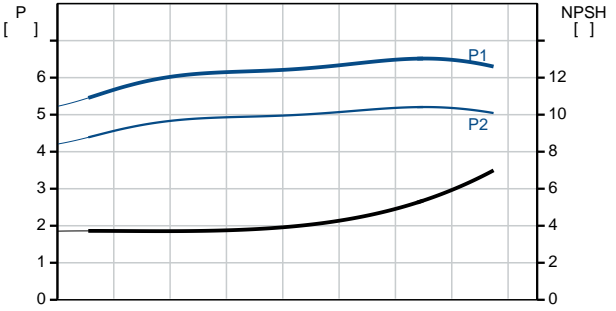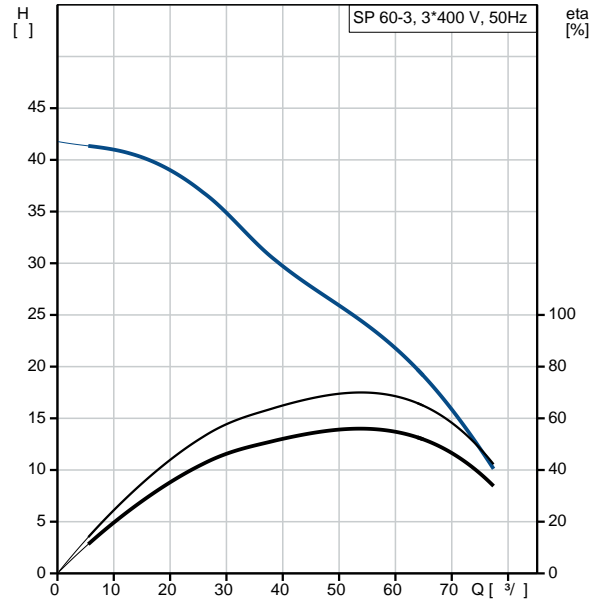


MEI :	0.40
ErP :	EuP / .
:	38.9
:	43.3
:	0.052 <sup>3</sup>

## 14A21903 SP 60-3 50

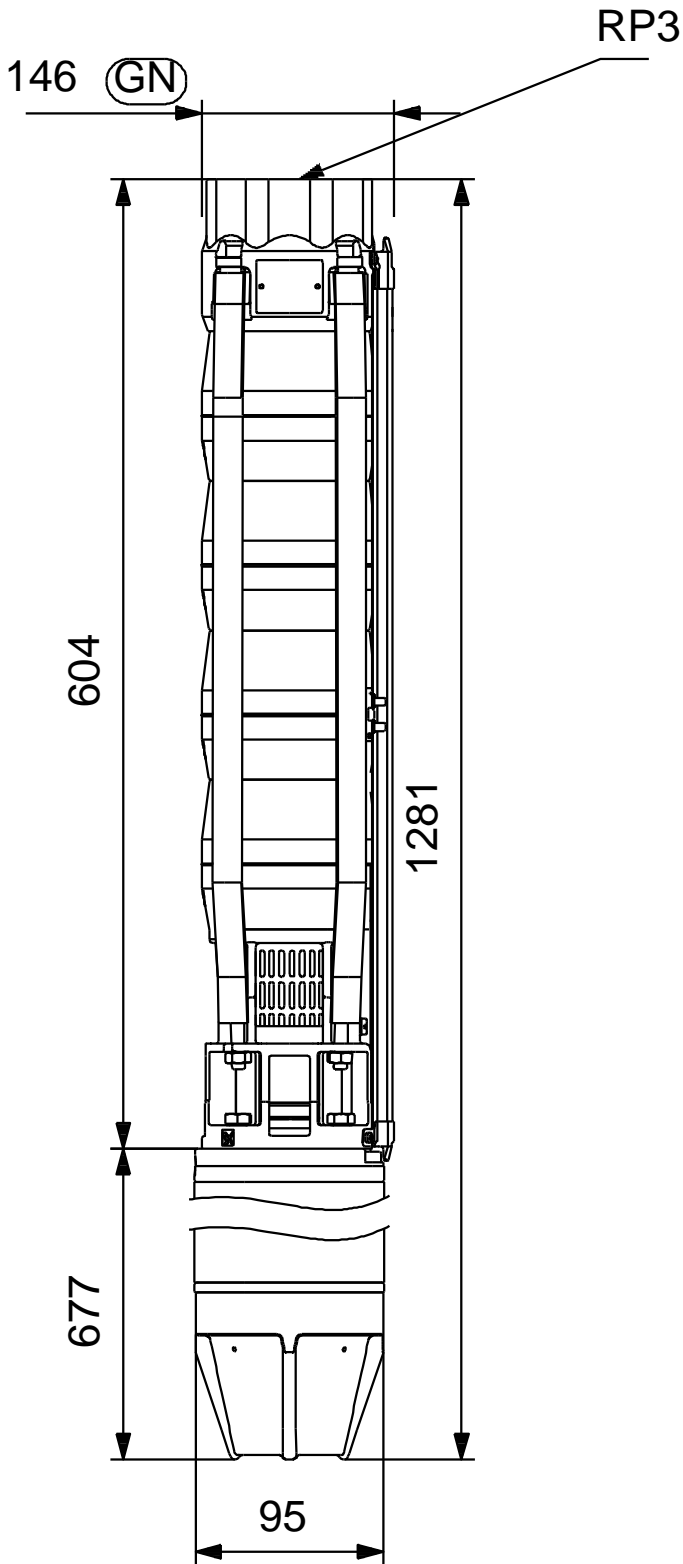

14A21903 SP 60-3 50

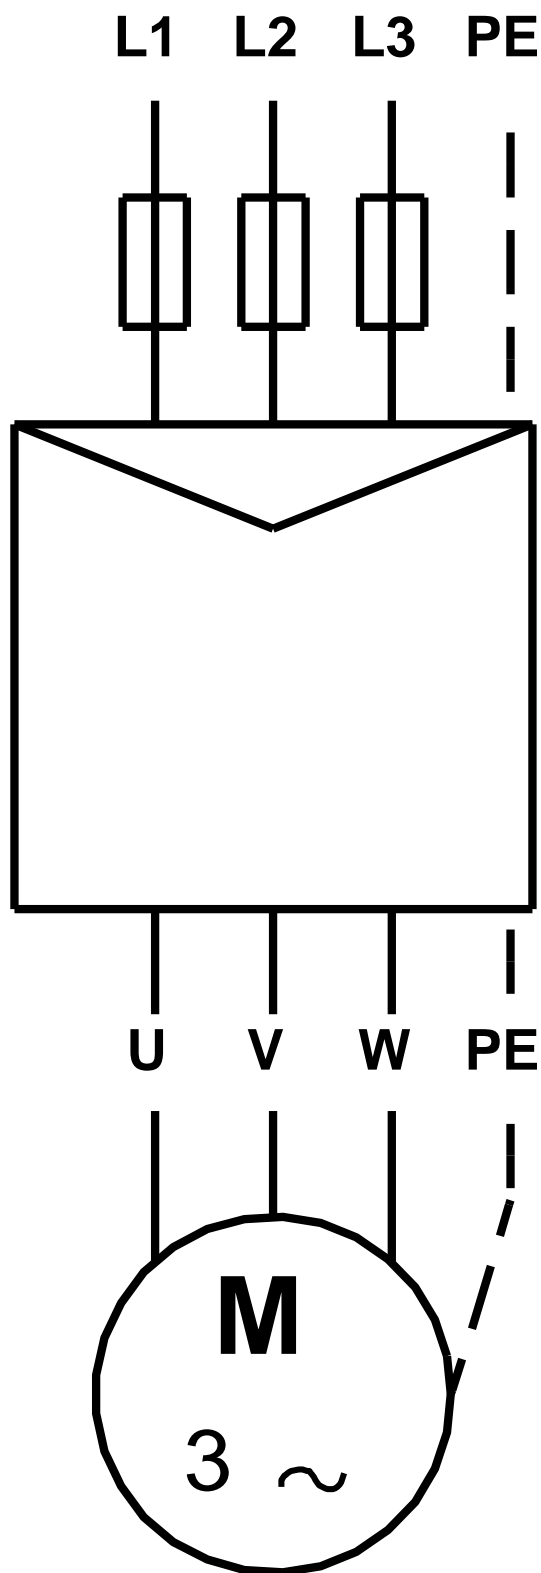

! [ ], .