

1 SP 46-3-C



: 15A019F3

, EN 1.4301 (AISI 304),

MS40004

40 °C.

MP204

Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 46 <sup>3</sup>/  
 : 21

: HM/CER  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40

EN 1.4301  
 AISI AISI 304


EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

: RP4  
 : 4 inch

: MS4000  
 - P2: 4  
 ( 2), : 4  
 : 50 Hz  
 : 3 x 380-400-415  
 : 9.75-9.60-9.80 A  
 : 460-500-530 %  
 Cos - : 0.85-0.80-0.77  
 : 2850-2865-2875 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195510  
 :  
 ErP : MEI : 0.40  
 : EuP / .  
 : 33.9  
 : 38.3  
 : 0.052 <sup>3</sup>

## 15A019F3 SP 46-3-C 50

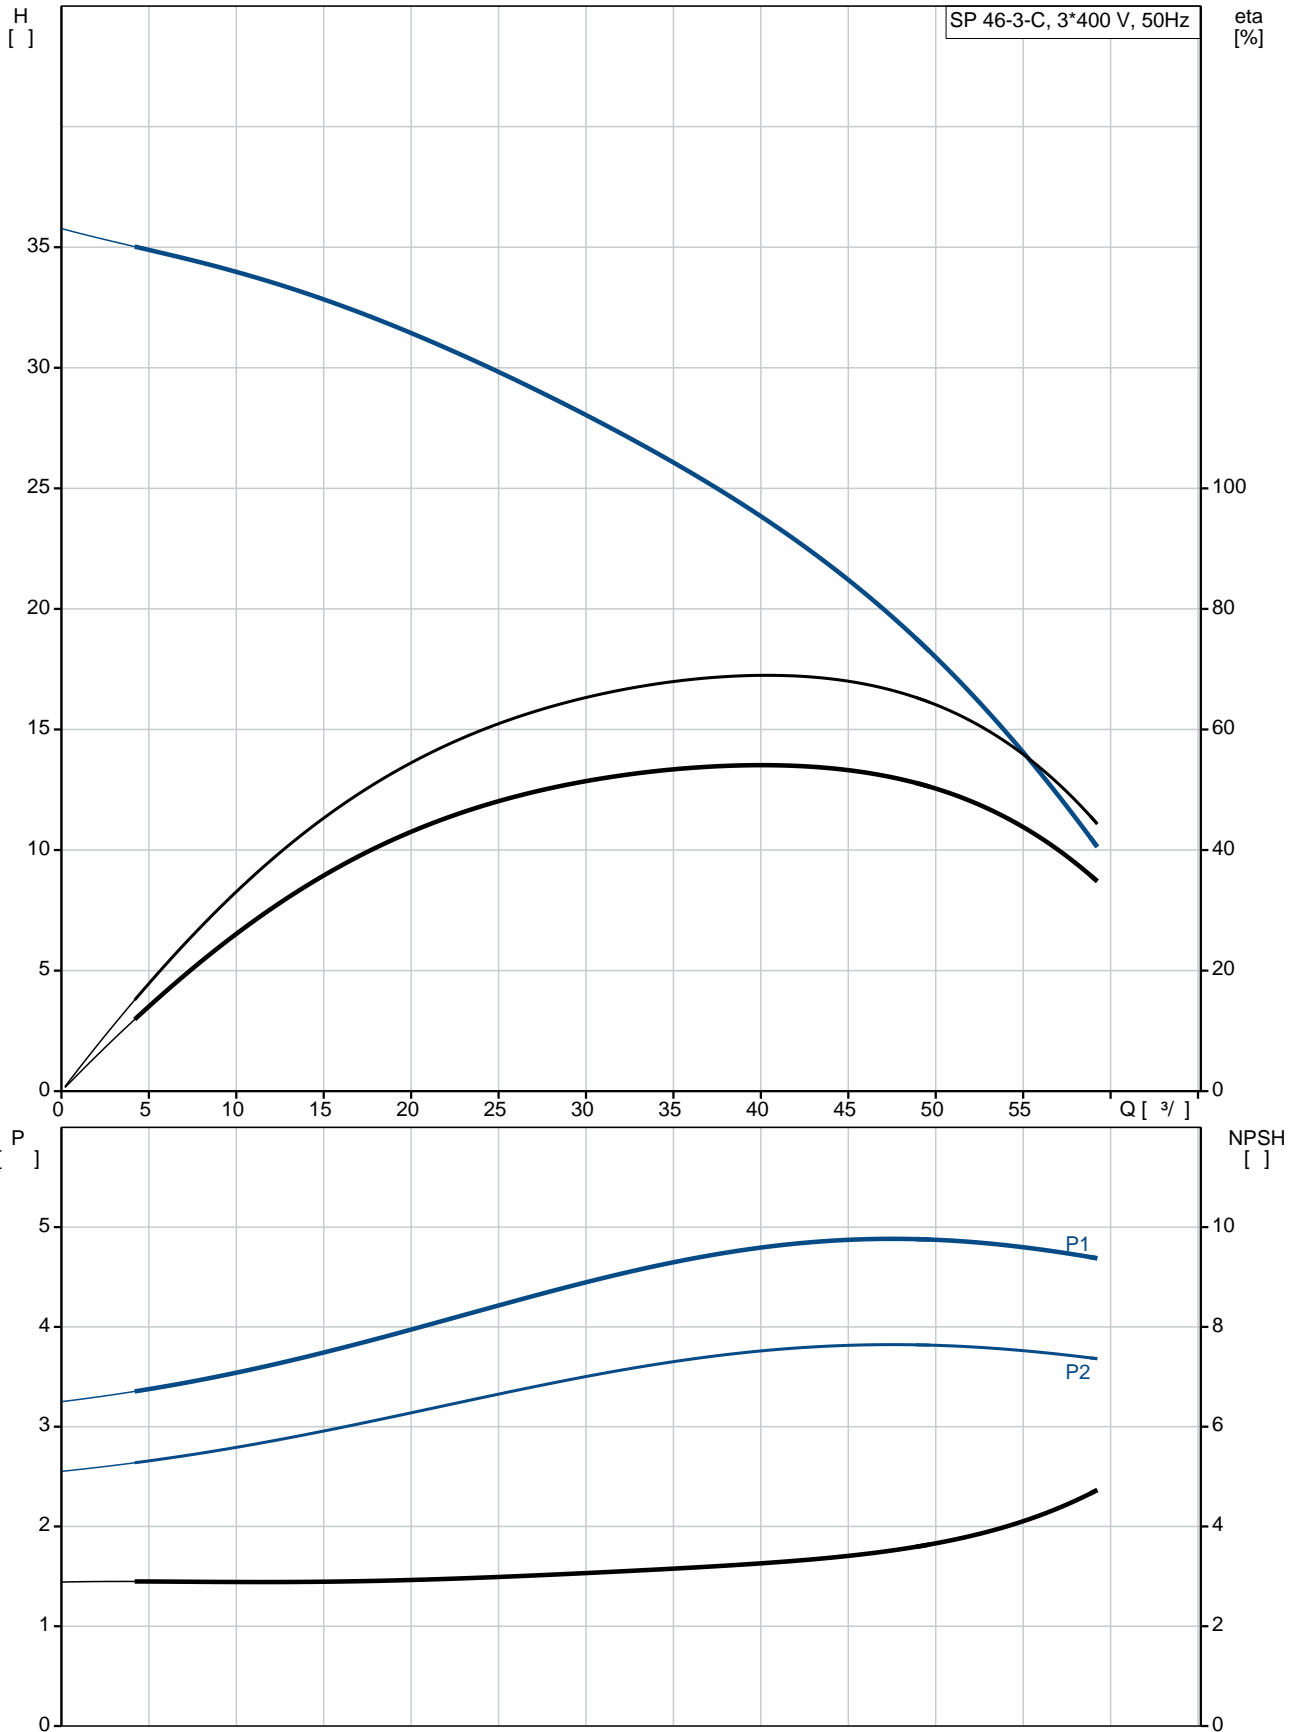

SP 46-3-C  
 15A019F3  
 EAN : 5700393967557

2900 /  
 46 <sup>3/</sup>  
 21  
 3  
 C  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

RP4  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS4000  
 GRUNDFOS  
 - P2: 4  
 ( 2), 4

50 Hz  
 3 x 380-400-415  
 9.75-9.60-9.80 A  
 460-500-530 %  
 Cos - : 0.85-0.80-0.77  
 2850-2865-2875 /


(IEC 34-5): IP68  
 (IEC 85): F

79195510

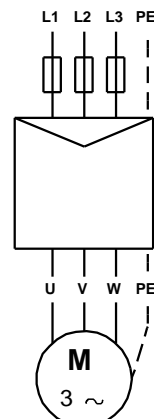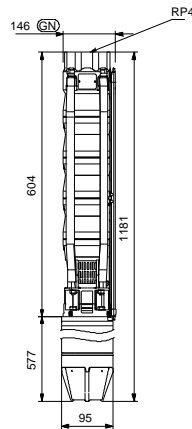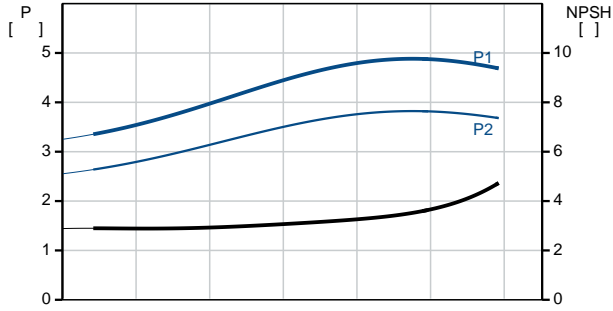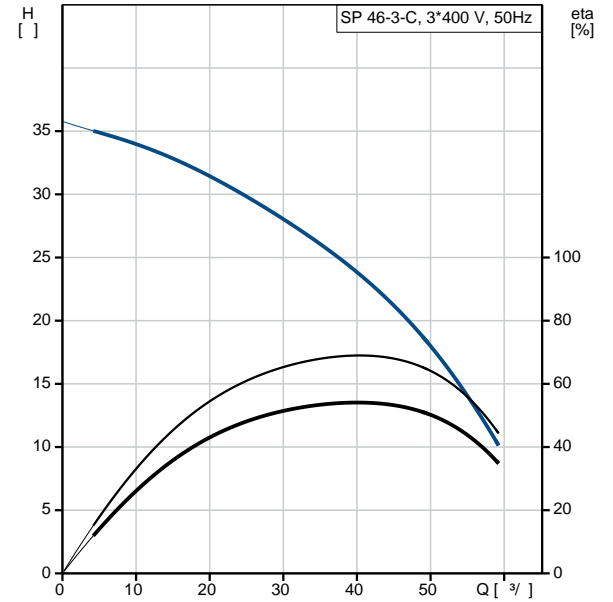

MEI :		0.40
ErP :	EuP	/ .
:		33.9
:		38.3
:		0.052 <sup>3</sup>

## 15A019F3 SP 46-3-C 50

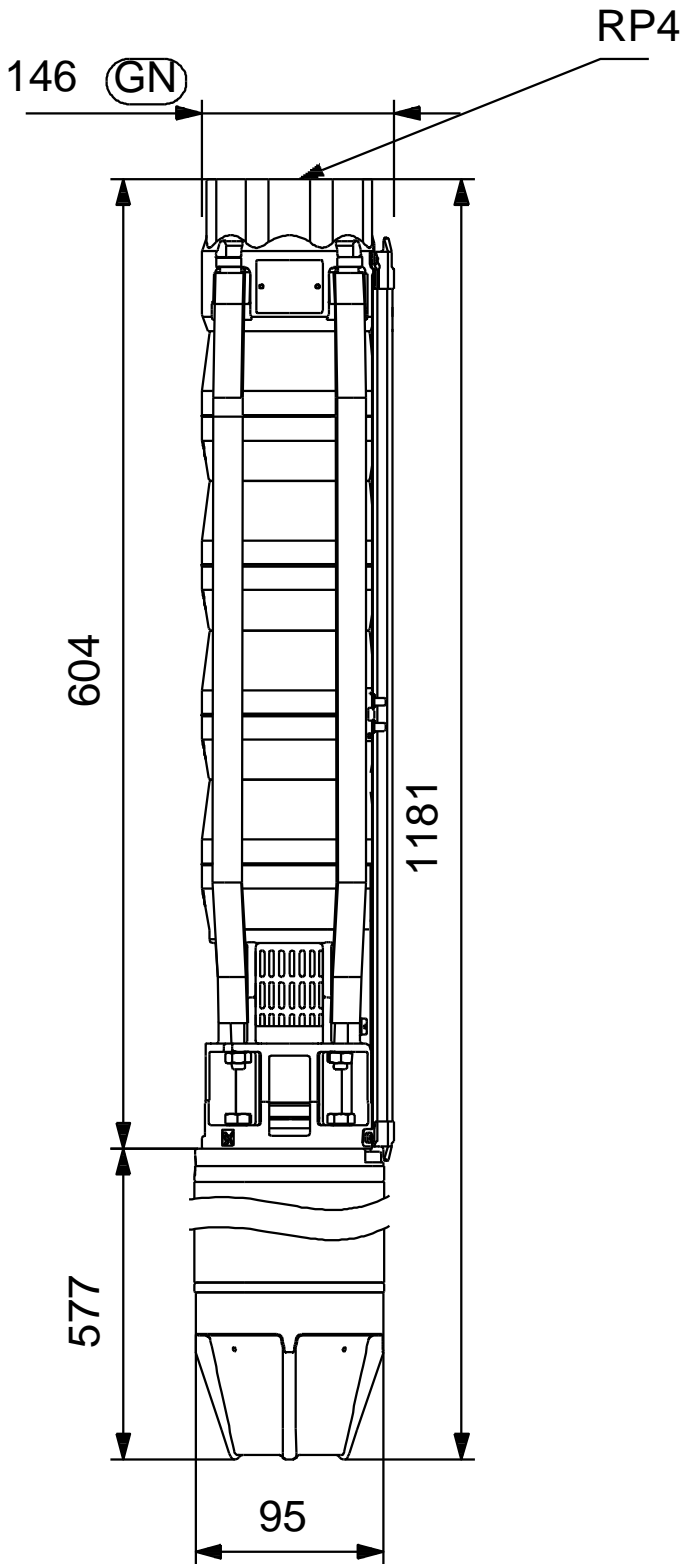

**15A019F3 SP 46-3-C 50**



! [ ], .