

1 SP 46-2



: 15A21902

, EN 1.4301 (AISI 304),

MS40003

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 20 °C  
 : 998.2 / <sup>3</sup>

: 2900 /

: 46 <sup>3</sup>/<sub>17</sub>

: HM/CER

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301  
AISI AISI 304



EN 1.4301  
AISI AISI 304

DIN W.-Nr. 1.4301  
AISI 304

RP3  
: 4 inch

MS4000  
- P2: 3  
( 2), : 3  
: 50 Hz  
: 3 x 380-400-415  
: 7.70-7.85-8.10 A  
: 460-490-500 %  
Cos - : 0.82-0.77-0.73  
: 2850-2865-2875 /  
:  
(IEC 34-5): IP68  
(IEC 85): F  
:  
: 79194508  
:  
ErP : MEI : 0.40  
: EuP /  
: 27.5  
: 30.1  
: 0.032 <sup>3</sup>  
Danish VVS No.: 388462002  
C : DK  
: 8413702900

## 15A21902 SP 46-2 50

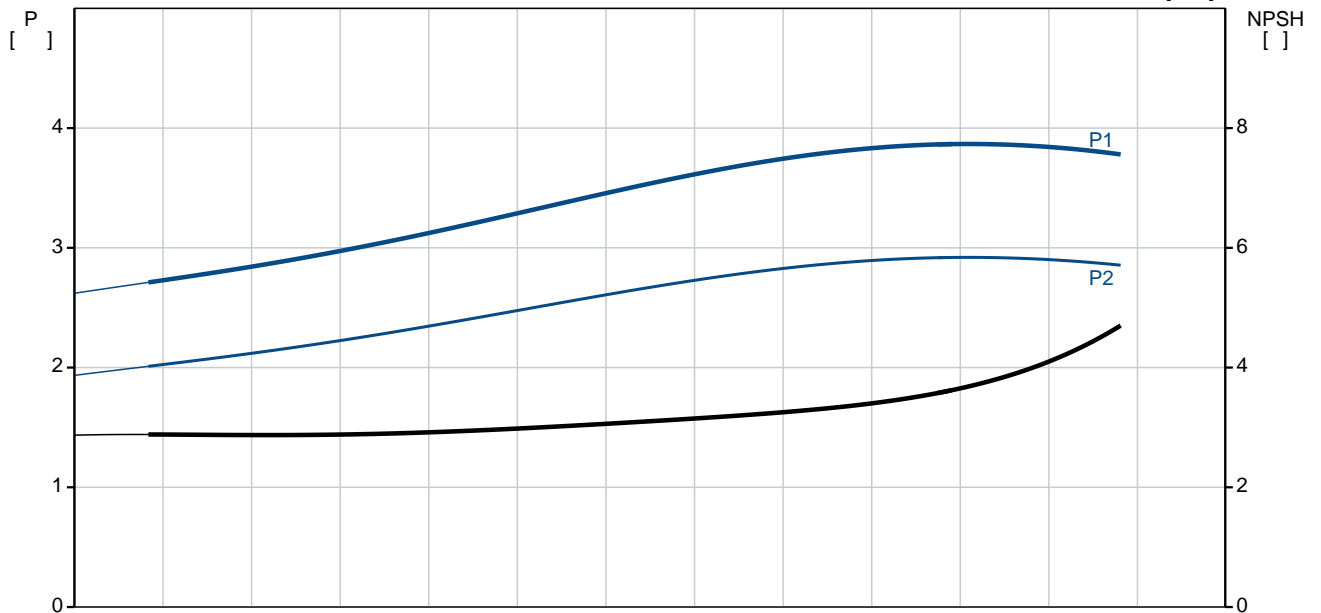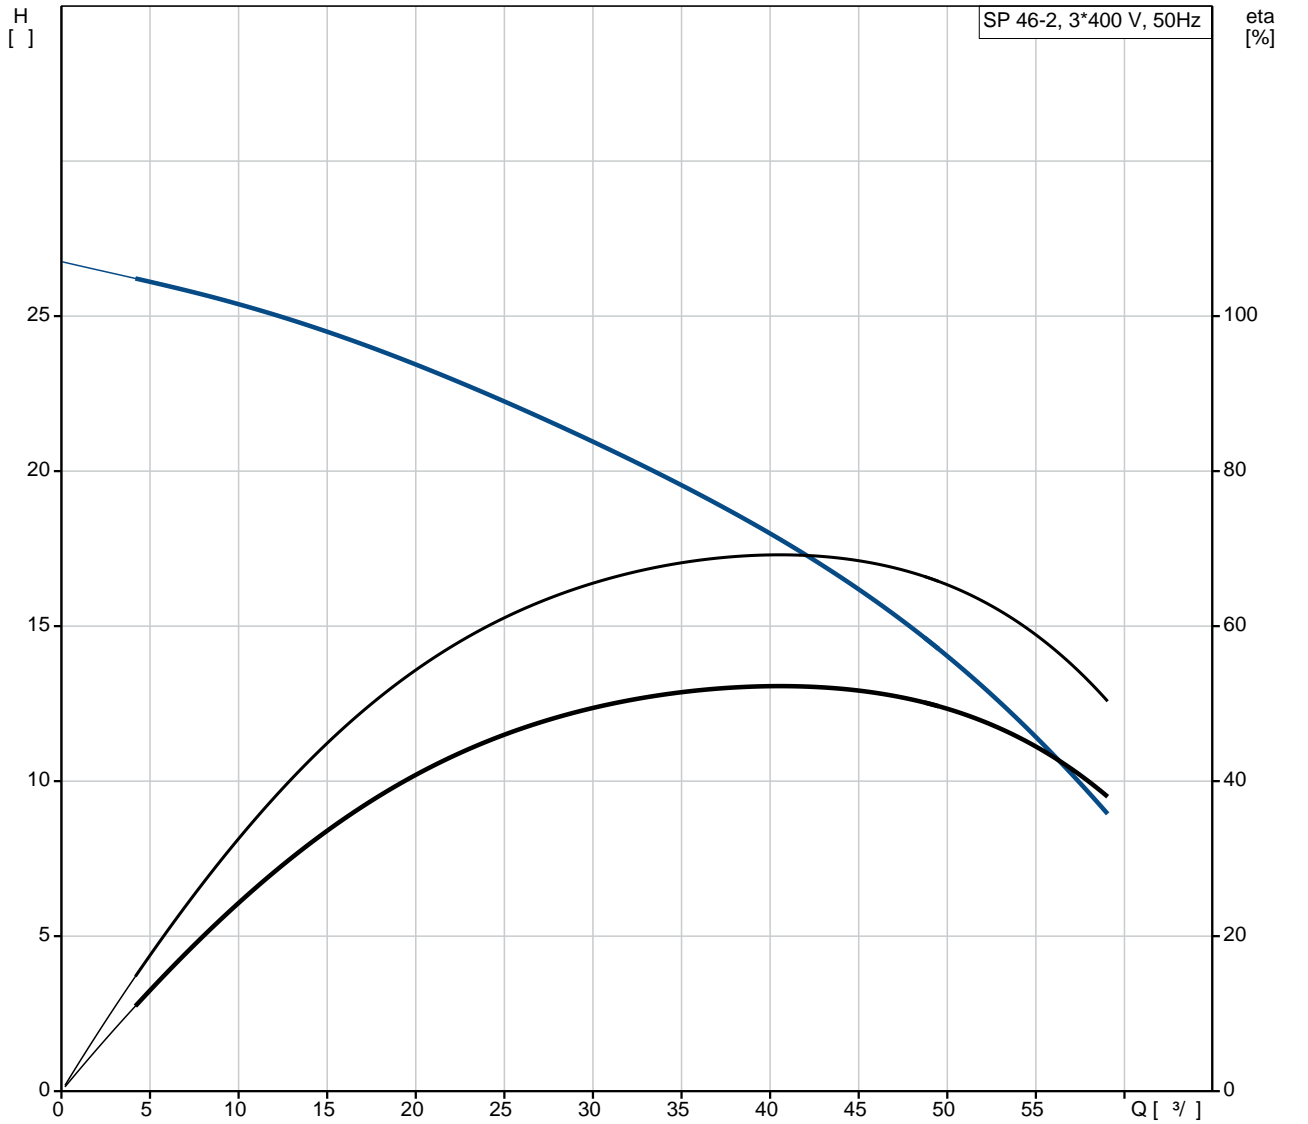

SP 46-2  
 15A21902  
 EAN : 5700391150975

2900 /  
 46 <sup>3</sup>/<sub>l</sub>  
 17  
 2  
 NONE  
 HM/CER  
 CE,EAC  
 ISO9906:2012 3B  
 B  
 YES  
 T40

EN 1.4301  
 AISI AISI 304  
 EN 1.4301  
 AISI AISI 304  
 DIN W.-Nr. 1.4301  
 AISI 304

RP3  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / <sup>3</sup>

MS4000  
 GRUNDFOS  
 - P2: 3  
 ( 2), 3

50 Hz  
 3 x 380-400-415  
 7.70-7.85-8.10 A  
 460-490-500 %  
 Cos - : 0.82-0.77-0.73  
 2850-2865-2875 /

(IEC 34-5): IP68  
 (IEC 85): F

79194508

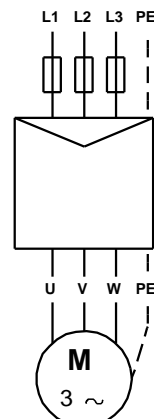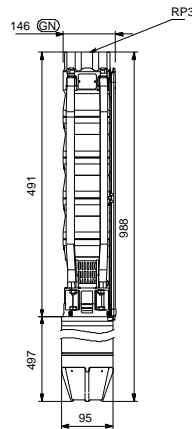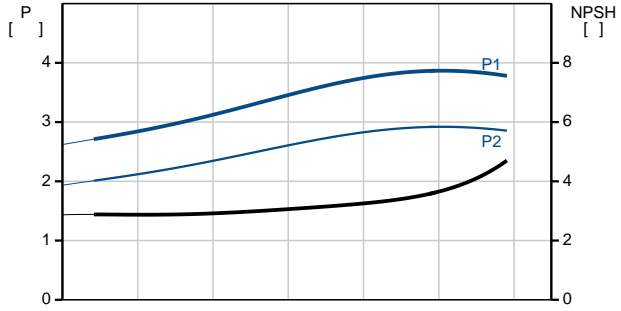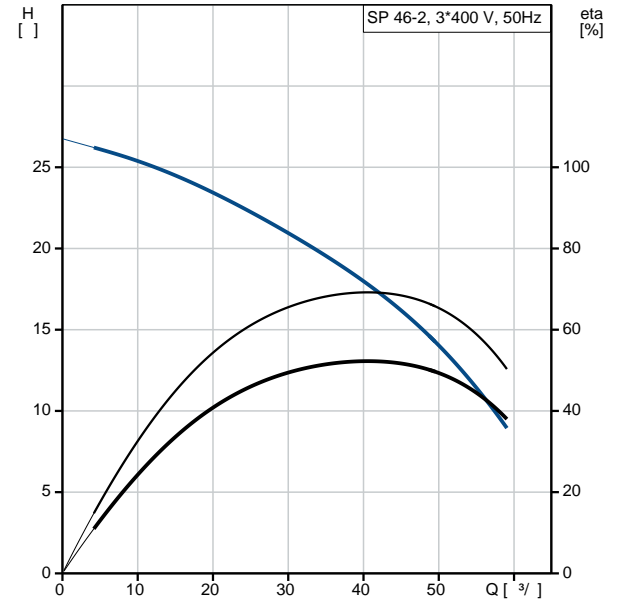

MEI :	0.40
ErP :	EuP / .
:	27.5
:	30.1
:	0.032 <sup>3</sup>
Danish VVS No.:	388462002
C :	DK
:	8413702900

## 15A21902 SP 46-2 50

