

1 SP 46-1-B



: 15A219C1

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

: 46 ³/₅

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301
AISI AISI 304


EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

RP3
: 4 inch

MS402
- P2: 1.1
(2), : 1.1
: 50 Hz
: 3 x 380-400-415
: 3.25-3.40-3.65 A
: 480-480-470 %
Cos - : 0.76-0.72-0.65
: 2850-2860-2870 /
: (IEC 34-5): IP68
(IEC 85): B
: 79192005
: MEI : 0.40
ErP : EuP /
: 16.9
: 19.5
: 0.032 ³
C : DK
: 8413702900

15A219C1 SP 46-1-B 50

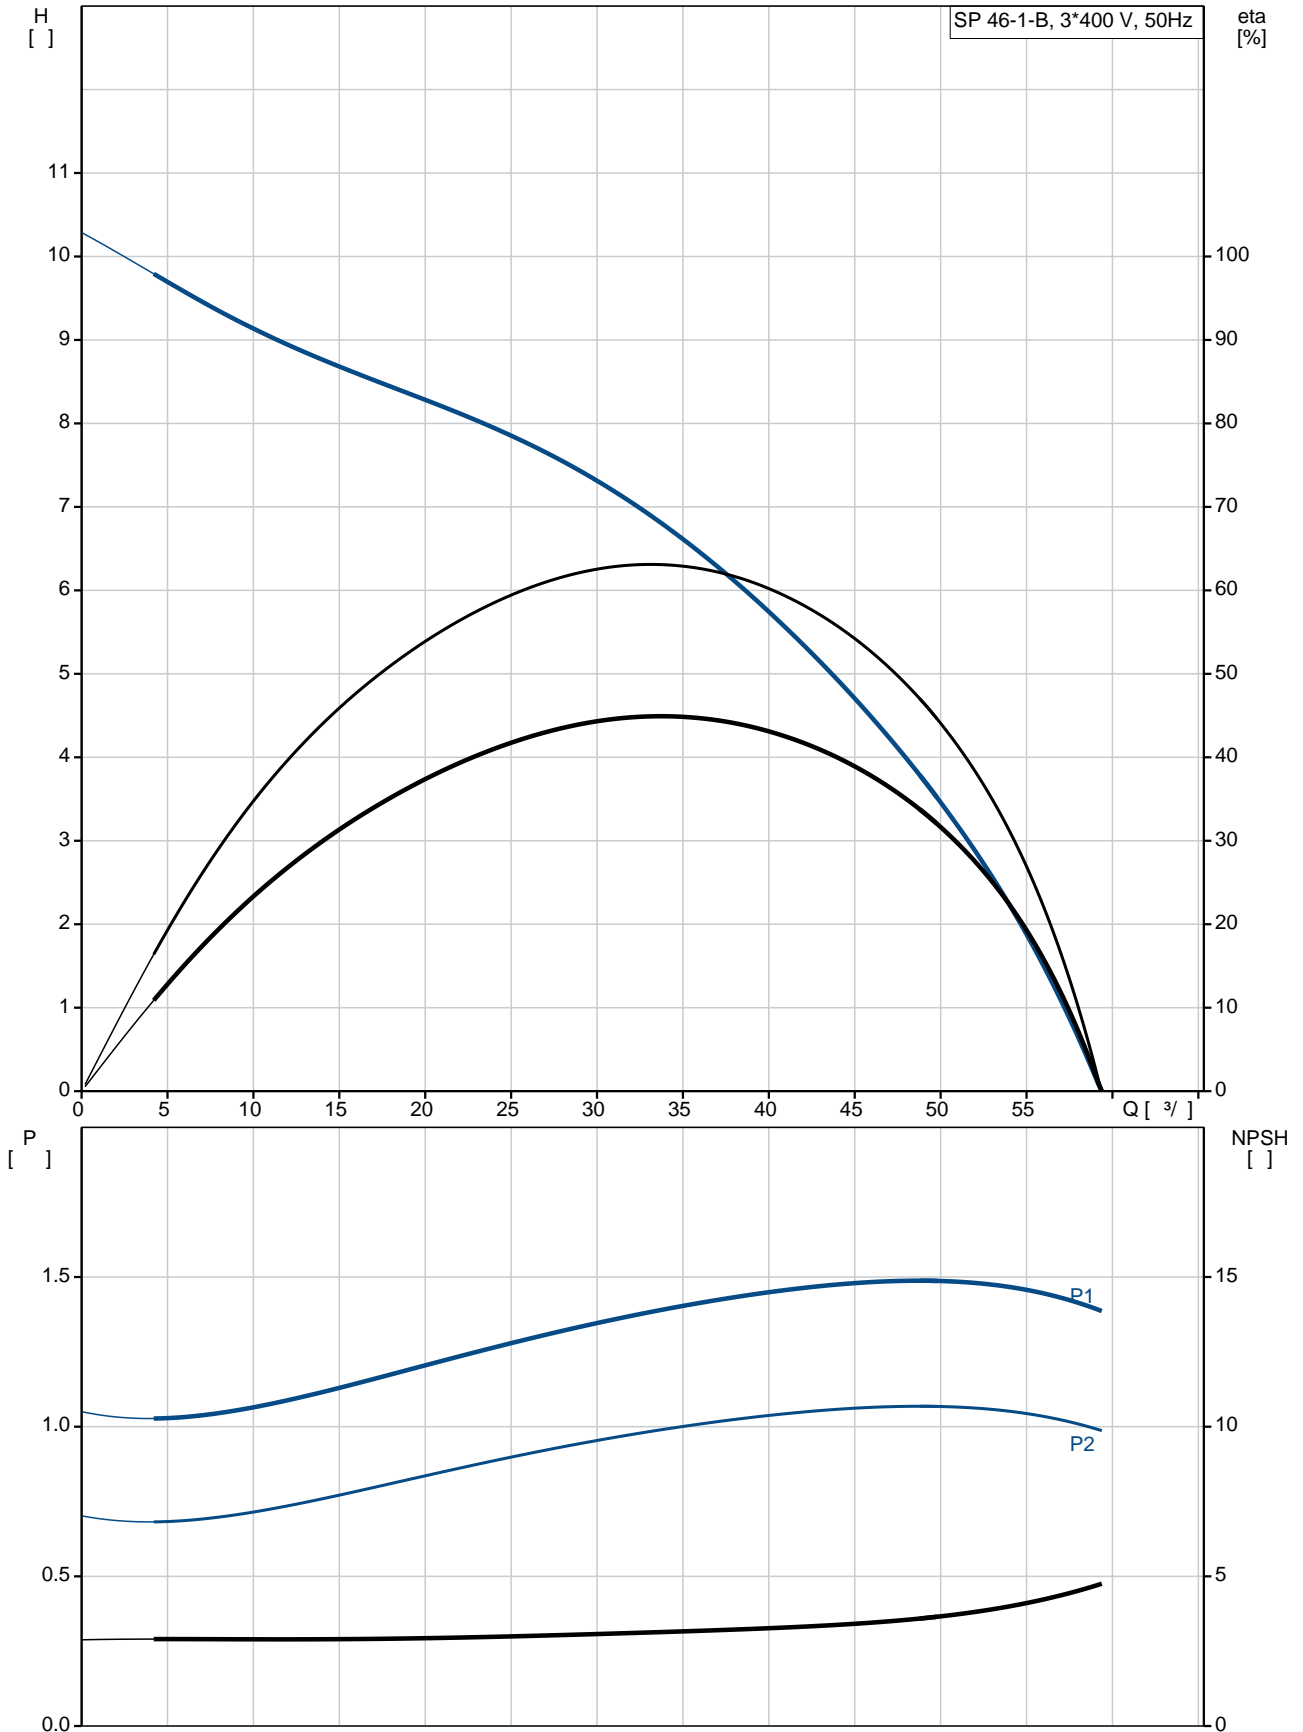

SP 46-1-B
15A219C1
 EAN : 5700393587359

2900 /
 46 ^{3/}
 5
 1
 B
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 B
 YES
 T40

EN 1.4301
 AISI AISI 304

EN 1.4301
 AISI AISI 304

DIN W.-Nr. 1.4301
 AISI 304

RP3
 4 inch

Maximum liquid temperature: 40 °C

. t 0,15 / : 40 °C

: 20 °C

: 998.2 / ³

MS402
 GRUNDFOS
 - P2: 1.1





(2), 1.1

50 Hz
 3 x 380-400-415
 3.25-3.40-3.65 A

Cos : 480-480-470 %
 : 0.76-0.72-0.65
 : 2850-2860-2870 /

(IEC 34-5): IP68
 (IEC 85): B

: 79192005

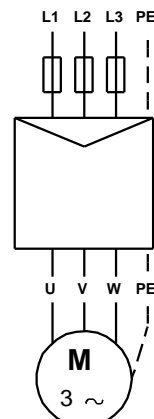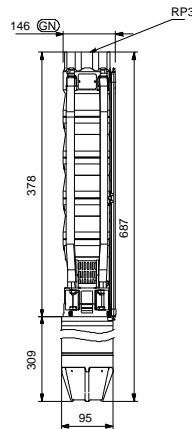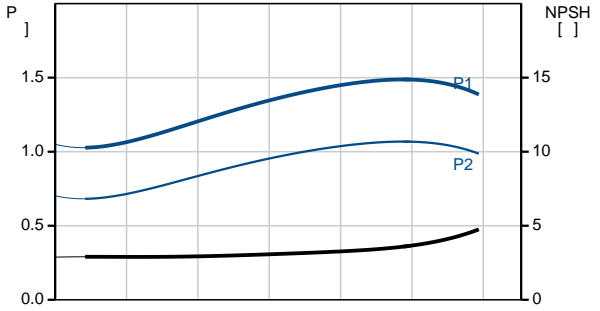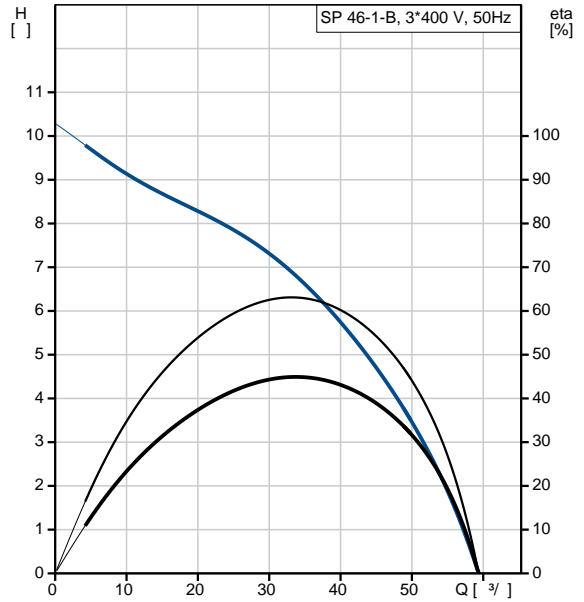

MEI :		0.40
ErP :	EuP	/ .
:		16.9
:		19.5
:		0.032 ³
C :	DK	
:		8413702900

15A219C1 SP 46-1-B 50

