

1 SP 46-2-BB



: 15A219D2

, EN 1.4301 (AISI 304),

MS4022.2

40 °C.

Pt1000.
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 20 °C
 : 998.2 / ³

: 2900 /

: 46 ³/₁₀

: LIPSEAL

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4301
AISI AISI 304


EN 1.4301
AISI AISI 304

DIN W.-Nr. 1.4301
AISI 304

RP3
: 4 inch

MS402
- P2: 2.2
(2), : 2.2
: 50 Hz
: 3 x 380-400-415
: 5.50-5.50-5.70 A
: 440-460-470 %
Cos - : 0.85-0.82-0.77
: 2850-2860-2870 /
: (IEC 34-5): IP68
(IEC 85): B
: 79192007
: MEI : 0.40
ErP : EuP /
: 22.4
: 25
: 0.032 ³
Danish VVS No.: 388463202
C : DK
: 8413702900

15A219D2 SP 46-2-BB 50

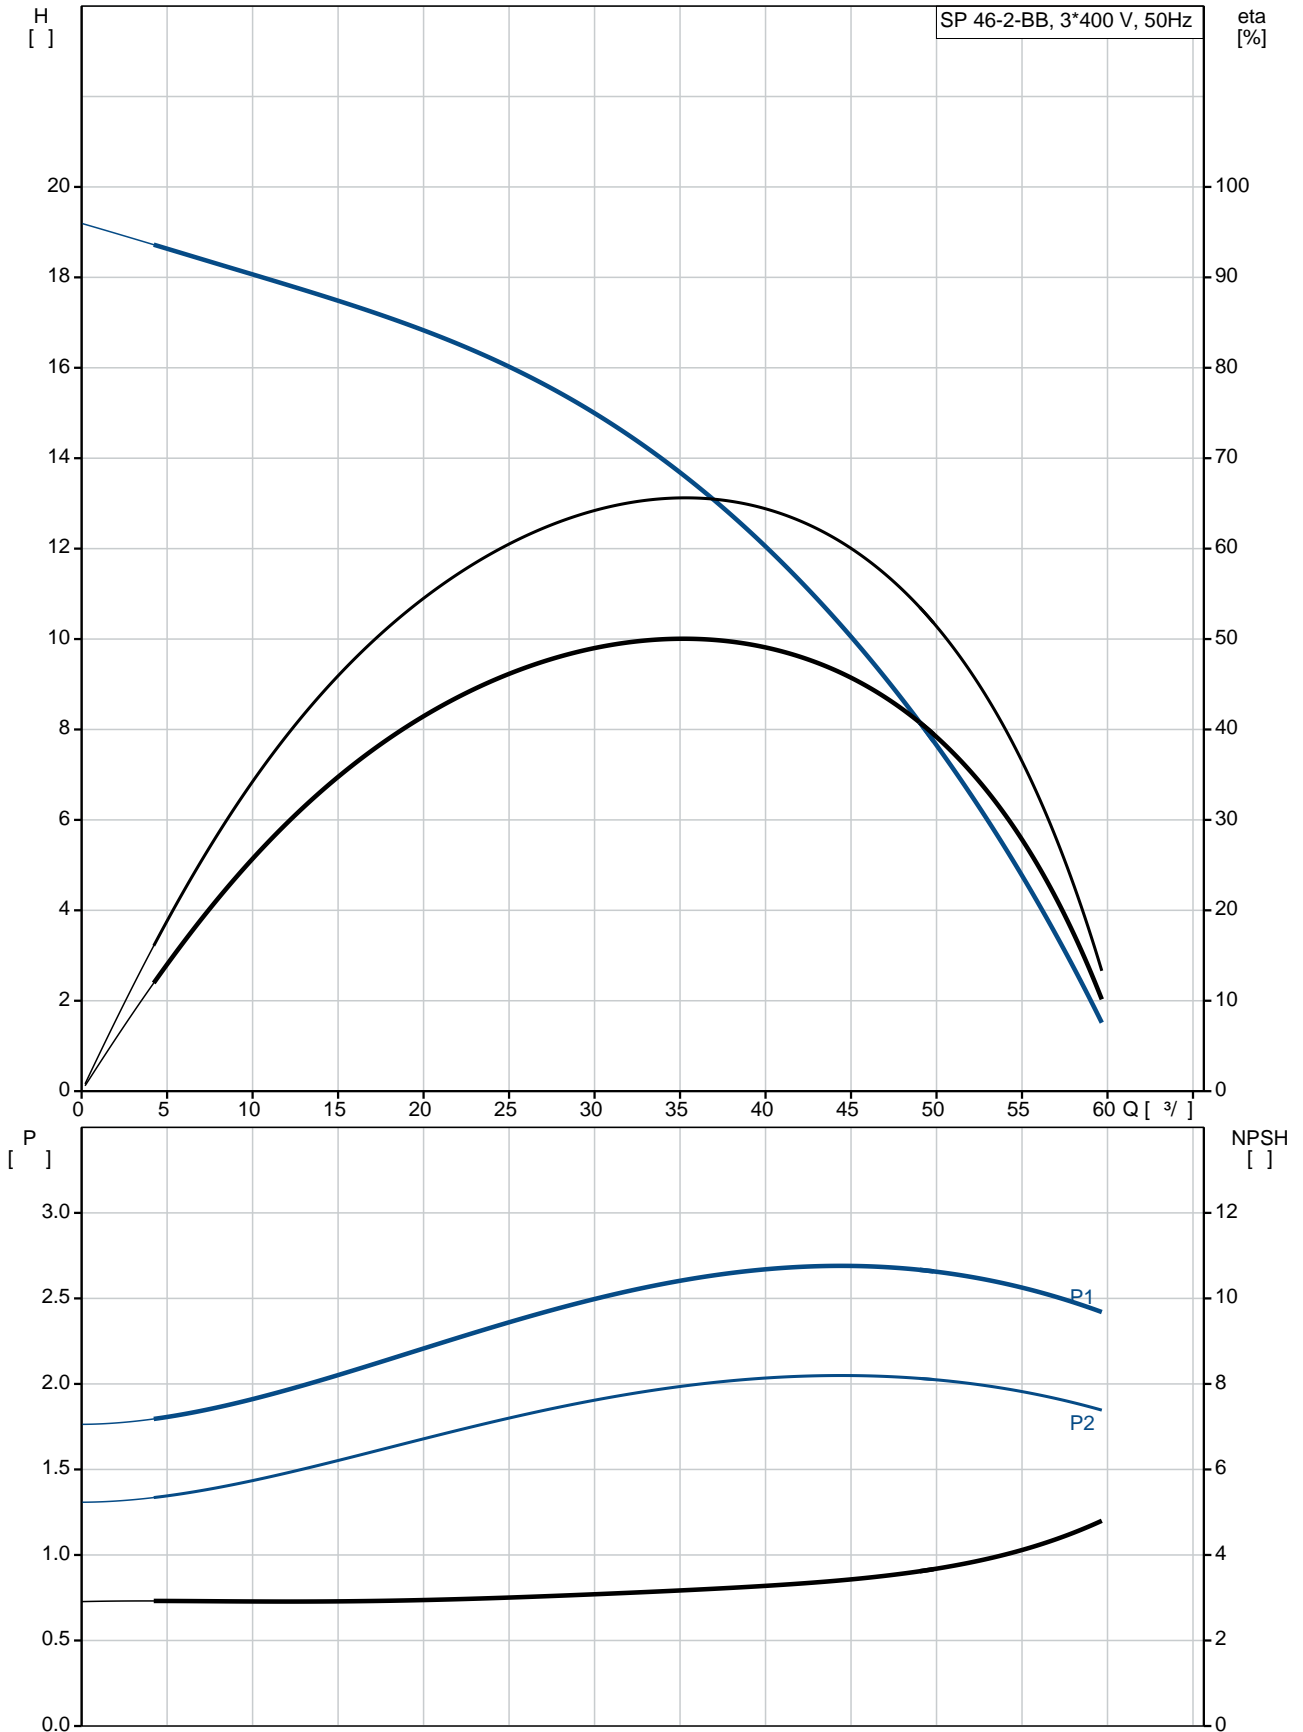

SP 46-2-BB
 15A219D2
 EAN : 5700393587373

2900 /
 46 ³/_l
 10
 2
 BB
 LIPSEAL
 CE,EAC
 ISO9906:2012 3B
 B
 YES
 T40

EN 1.4301
 AISI AISI 304
 EN 1.4301
 AISI AISI 304
 DIN W.-Nr. 1.4301
 AISI 304

RP3
 4 inch





Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / ³

MS402
 GRUNDFOS
 - P2: 2.2
 (2), 2.2

50 Hz
 3 x 380-400-415
 5.50-5.50-5.70 A
 440-460-470 %
 Cos - : 0.85-0.82-0.77
 2850-2860-2870 /

(IEC 34-5): IP68
 (IEC 85): B

79192007

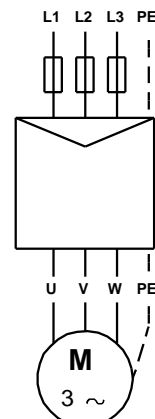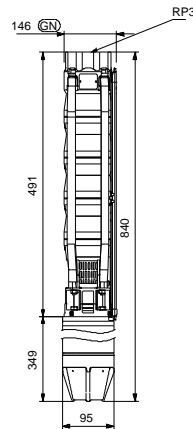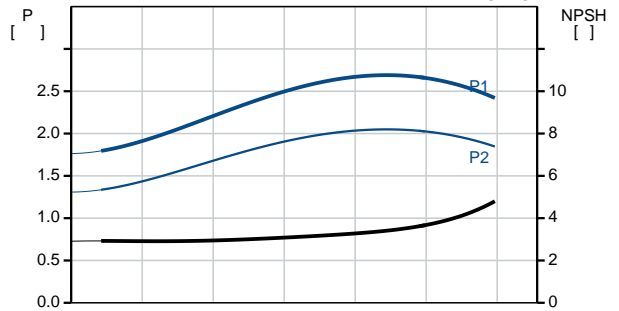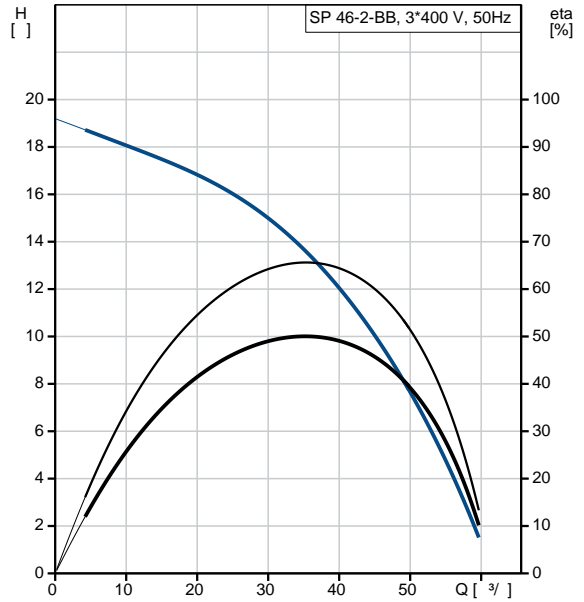

MEI :	0.40
ErP :	EuP / .
:	22.4
:	25
:	0.032 ³
Danish VVS No.:	388463202
C :	DK
:	8413702900

15A219D2 SP 46-2-BB 50

