

1 SP 46-1-BN



: 15C219C1

, EN 1.4401 (AISI 316),
MS40001.1

40 °C.

MP204

Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
0,15 / : 40 °C
: 20 °C
998.2 / ³

: 2900 /

46 ³/₅

: SIC/SIC

: CE,EAC

- : ISO9906:2012 3B

: T40

EN 1.4401
AISI AISI 316


EN 1.4401
AISI AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

RP3
: 4 inch

: MS4000
 - P2: 1.1
 (2), : 1.1
 : 50 Hz
 : 3 x 380-400-415
 : 2.80-2.75-2.75 A
 : 440-480-500 %
 Cos - : 0.85-0.82-0.78
 : 2850-2870-2880 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195605
 :
 ErP : MEI : 0.40
 : EuP /
 : 21.1
 : 23.7
 : 0.032 ³
 C : DK
 : 8413702900

15C219C1 SP 46-1-BN 50

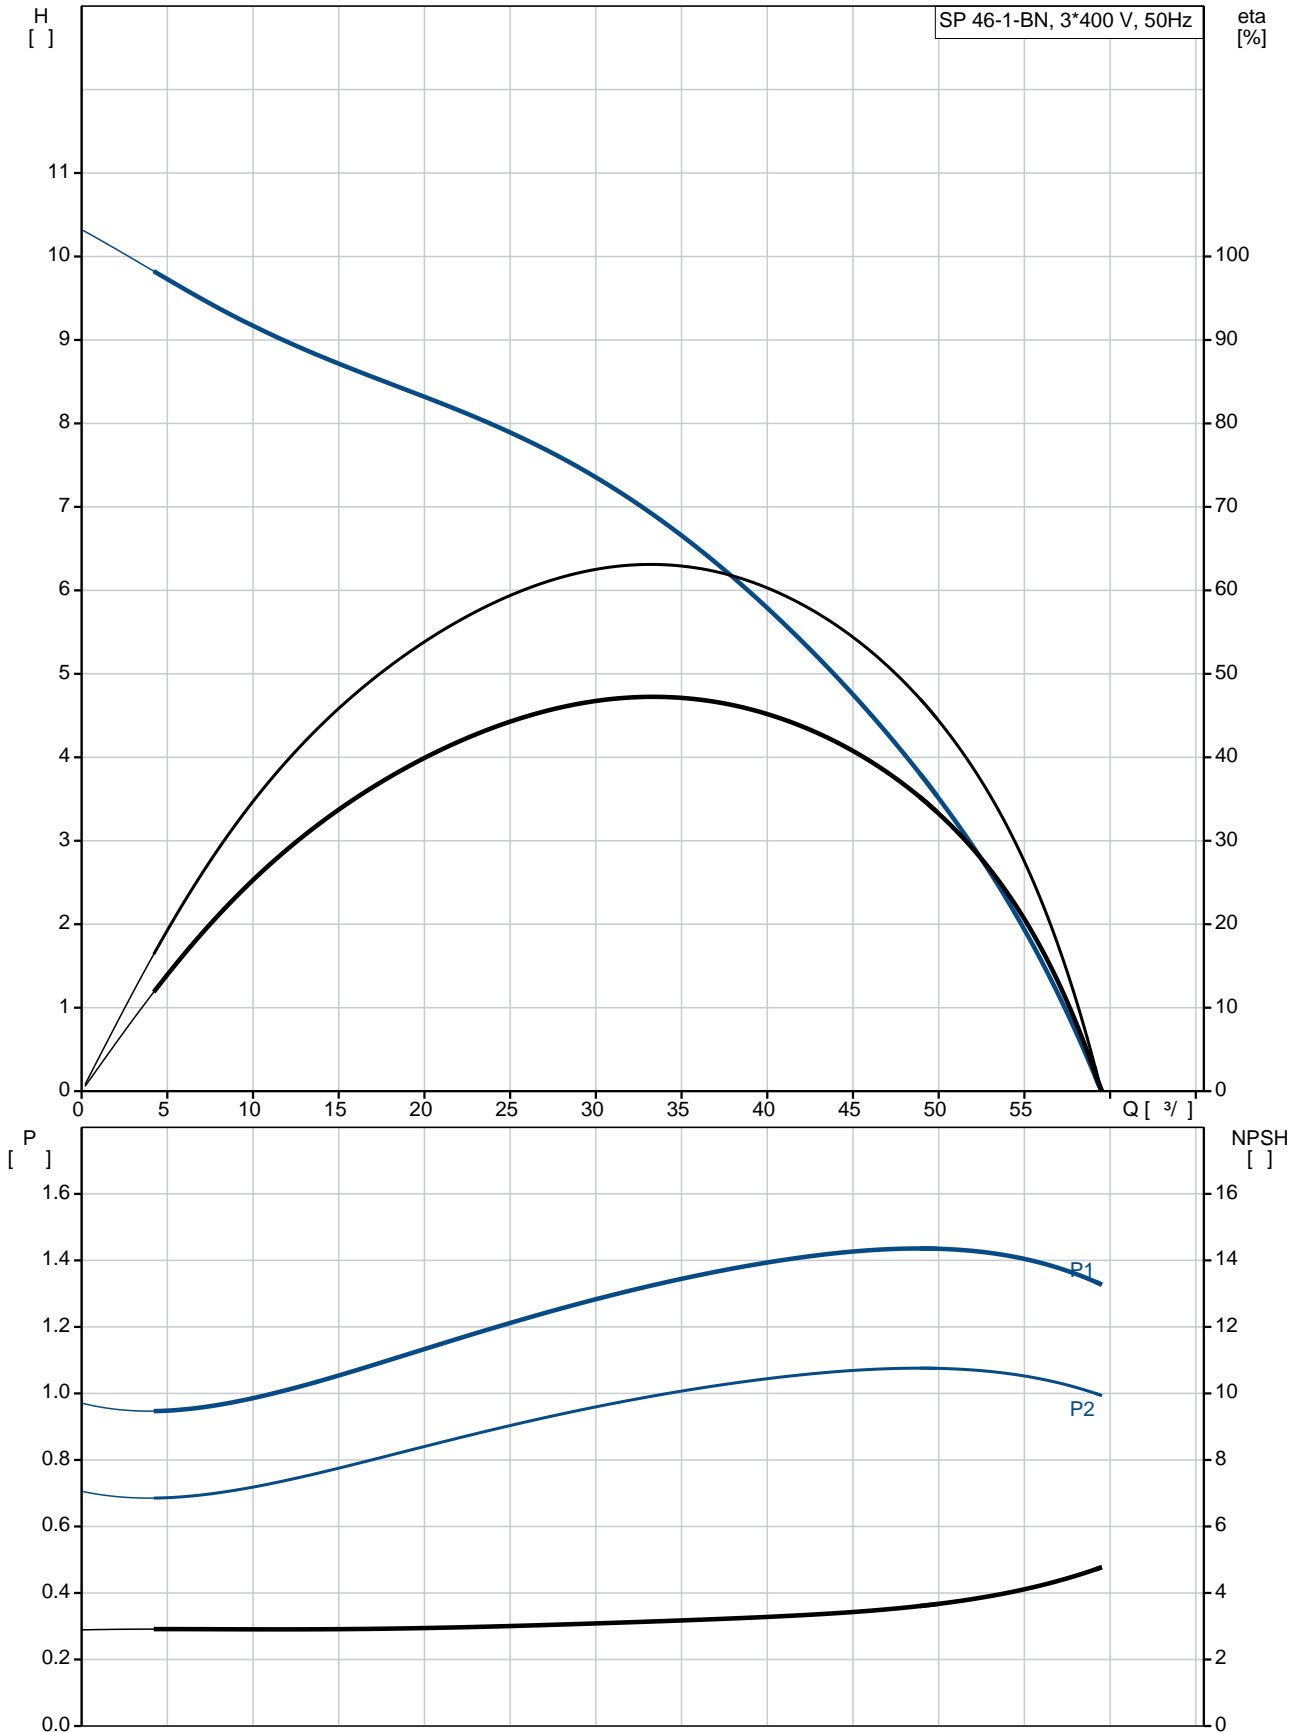

SP 46-1-BN
15C219C1
 EAN : 5700393969704

2900 /

46 ^{3/}

5

1

B

SIC/SIC

CE,EAC

ISO9906:2012 3B

B

YES

T40

EN 1.4401

AISI AISI 316

EN 1.4401

AISI AISI 316

DIN W.-Nr. 1.4539

AISI 904 L

RP3

4 inch

Maximum liquid temperature: 40 °C

.t 0,15 / : 40 °C

20 °C

998.2 / ³

MS4000

GRUNDFOS

- P2: 1.1

(2), 1.1

50 Hz

3 x 380-400-415

2.80-2.75-2.75 A

440-480-500 %





Cos - : 0.85-0.82-0.78

2850-2870-2880 /

(IEC 34-5): IP68

(IEC 85): F

79195605

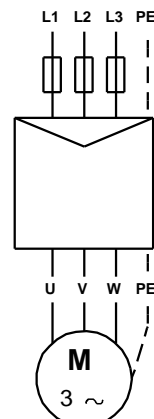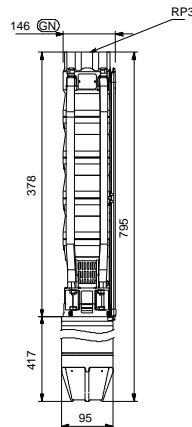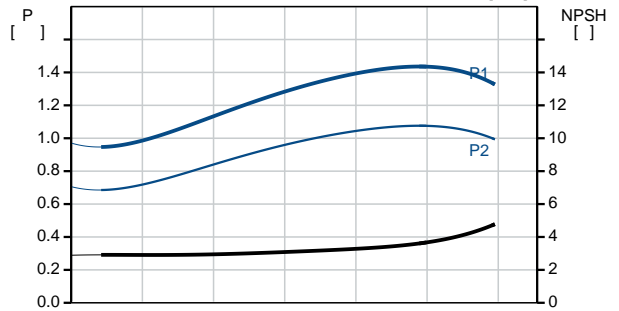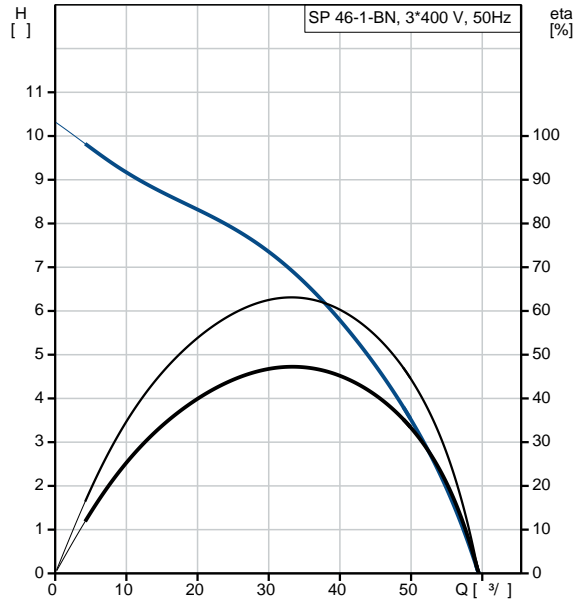

MEI :		0.40
ErP :	EuP	/ .
:		21.1
:		23.7
:		0.032 ³
C :	DK	
:		8413702900

15C219C1 SP 46-1-BN 50

