

1 **SP 46-2-BBN**



: 15C219D2

, EN 1.4401 (AISI 316),
MS40002.2

40 °C.

MP204

Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 46 ³/₁₀

: SIC/SIC
: CE,EAC

- : ISO9906:2012 3B
: T40

EN 1.4401
AISI AISI 316


EN 1.4401
AISI AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

RP3
: 4 inch

: MS4000
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.75-6.00-6.30 A
 : 440-450-450 %
 Cos - : 0.82-0.76-0.71
 : 2840-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195607
 :
 ErP : MEI : 0.40
 : EuP / .
 : 25.5
 : 28.1
 : 0.032 ³
 C : DK
 : 8413702900

15C219D2 SP 46-2-BBN 50

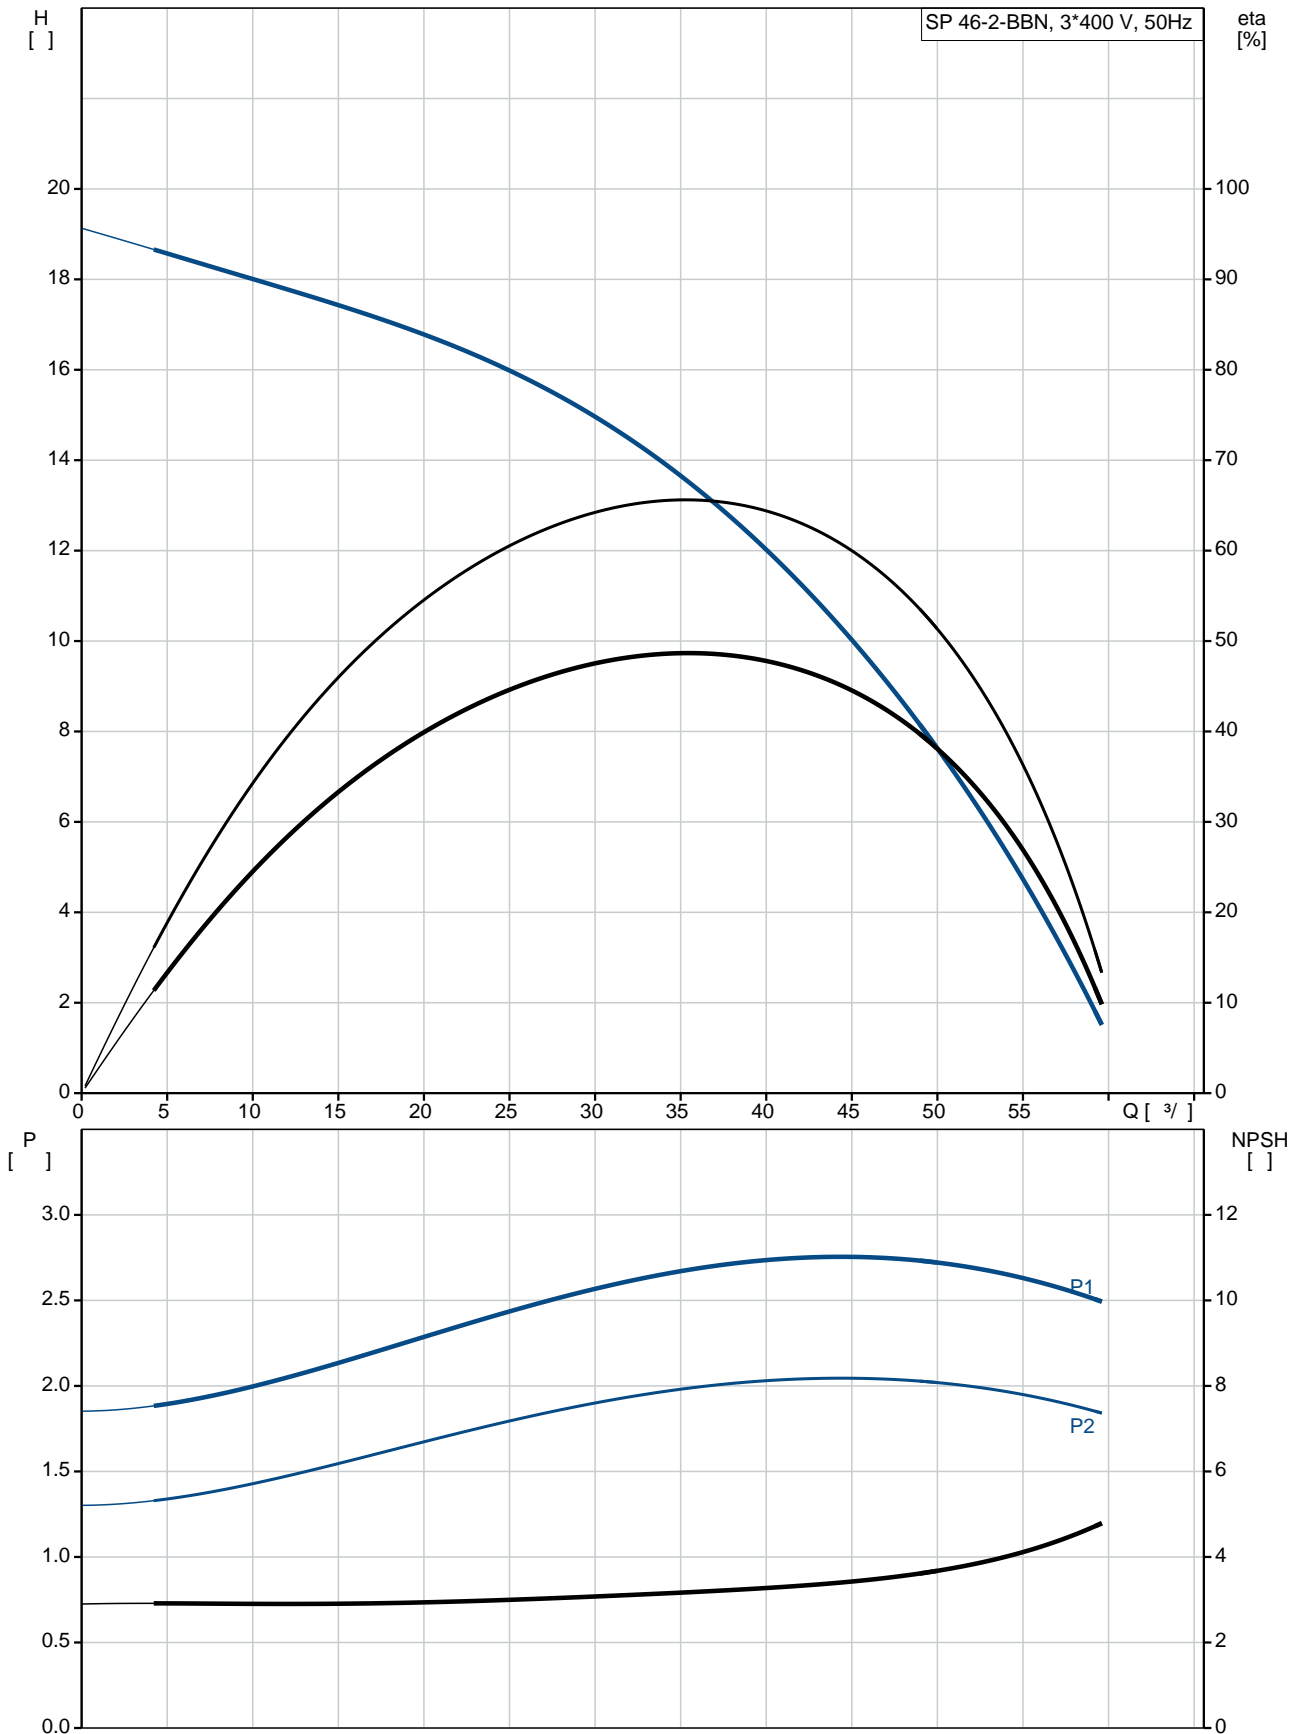

SP 46-2-BBN
 15C219D2
 EAN : 5700393969766

2900 /
 46 ³/_l
 10
 2
 BB
 SIC/SIC
 CE,EAC
 ISO9906:2012 3B
 B
 YES
 T40

EN 1.4401
 AISI AISI 316

EN 1.4401
 AISI AISI 316

DIN W.-Nr. 1.4539
 AISI 904 L

RP3
 4 inch

Maximum liquid temperature: 40 °C

0,15 / : 40 °C

20 °C

998.2 / ³

MS4000

GRUNDFOS

- P2: 2.2

(2), 2.2

50 Hz

3 x 380-400-415

5.75-6.00-6.30 A

440-450-450 %





Cos : 0.82-0.76-0.71

2840-2860-2870 /

(IEC 34-5): IP68


(IEC 85): F

79195607

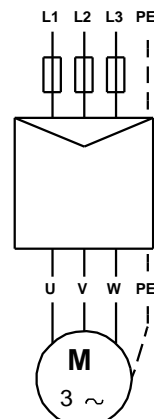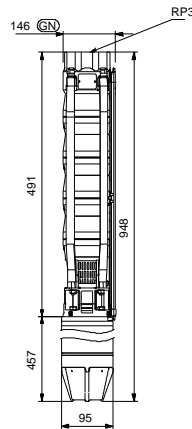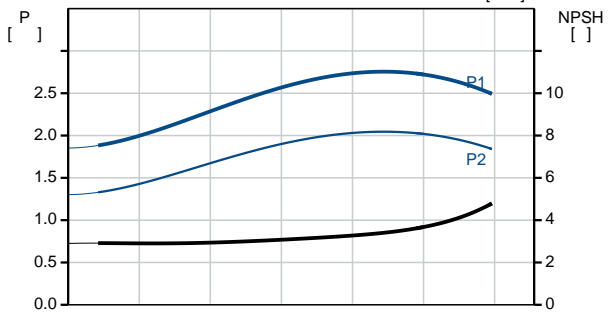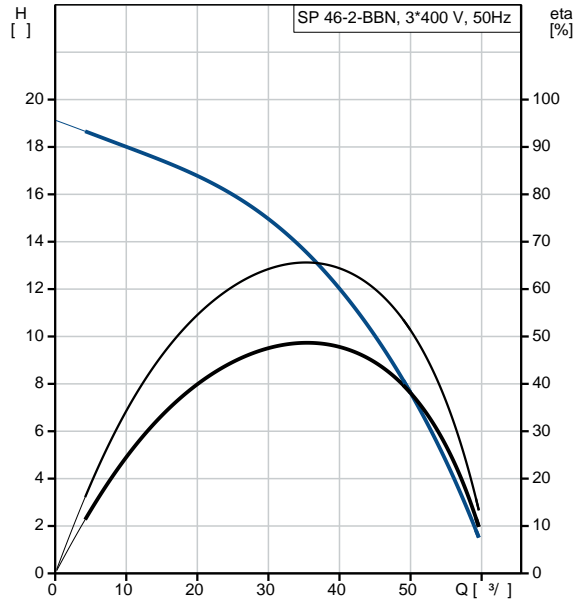

		MEI :	0.40
ErP	:	EuP	/ .
	:		25.5
	:		28.1
	:		0.032 ³
C	:	DK	
	:		8413702900

15C219D2 SP 46-2-BBN 50

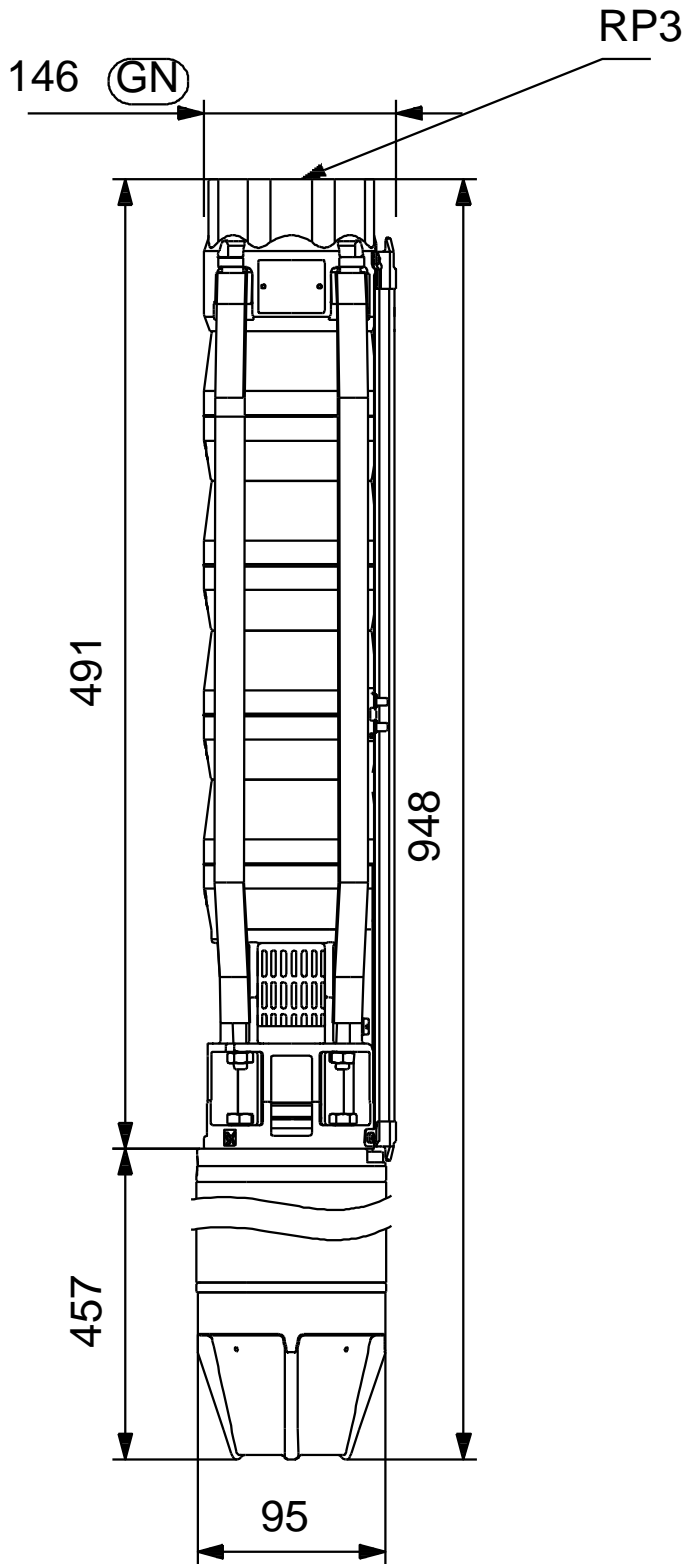

15C219D2 SP 46-2-BBN 50

