

1 SP 5A-12



: 5001912

, EN 1.4301 (AISI 304),

MS4021.1

40 °C.

Pt1000.  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 5 <sup>3</sup>/  
 49  
 : LIPSEAL  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : SPLINE


EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

:  
 : Rp1 1/2  
 : 4 inch  
 :  
 : MS402  
 - P2: 1.1  
 ( 2), : 1.1  
 : 50 Hz  
 : 3 x 380-400-415  
 : 3.25-3.40-3.65 A  
 : 480-480-470 %  
 Cos - : 0.76-0.72-0.65  
 : 2850-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): B  
 :  
 : 79192005  
 :  
 ErP : MEI : 0.50  
 : EuP /  
 : 14  
 : 12.5  
 : 16.3 <sup>3</sup>

## 5001912 SP 5A-12 50

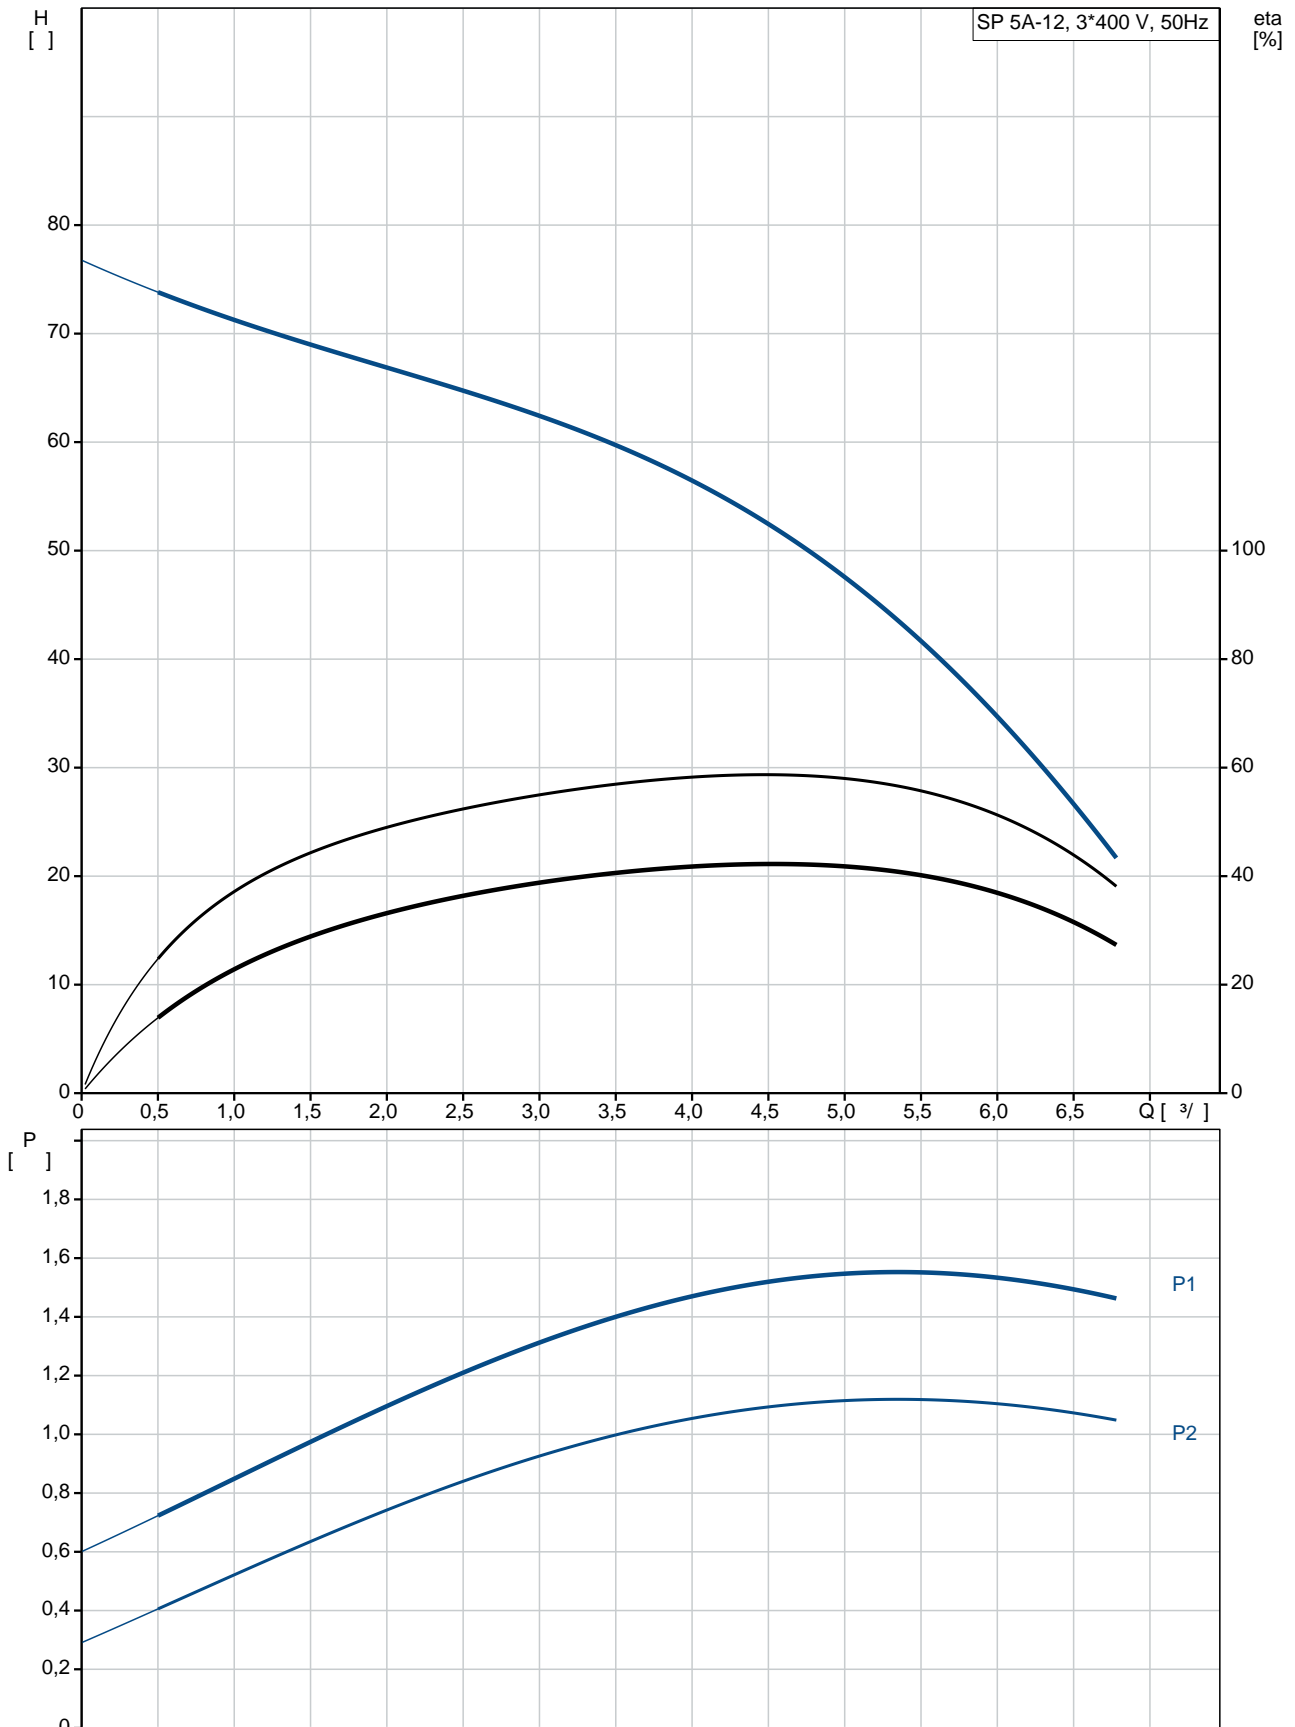

SP 5A-12  
 EAN : 5001912  
 5700390227081  
 2900 /  
 5 3/  
 49  
 12  
 NONE  
 LIPSEAL  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40  
 SPLINE

EN 1.4301  
 AISI AISI 304

EN 1.4301  
 AISI AISI 304

DIN W.-Nr. 1.4301  
 AISI 304

Rp1 1/2  
 4 inch





Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS402  
 GRUNDFOS  
 - P2: 1.1  
 ( 2), 1.1

50 Hz  
 3 x 380-400-415  
 3.25-3.40-3.65 A  
 480-480-470 %  
 Cos - : 0.76-0.72-0.65  
 2850-2860-2870 /


(IEC 34-5): IP68  
 (IEC 85): B

79192005

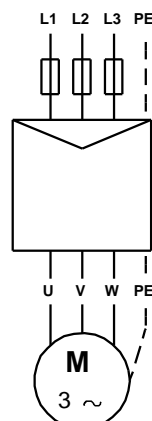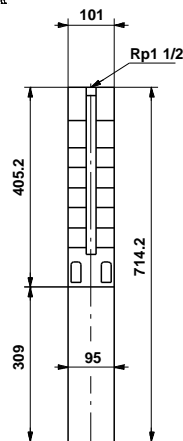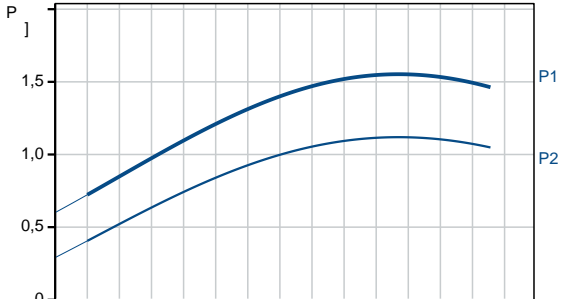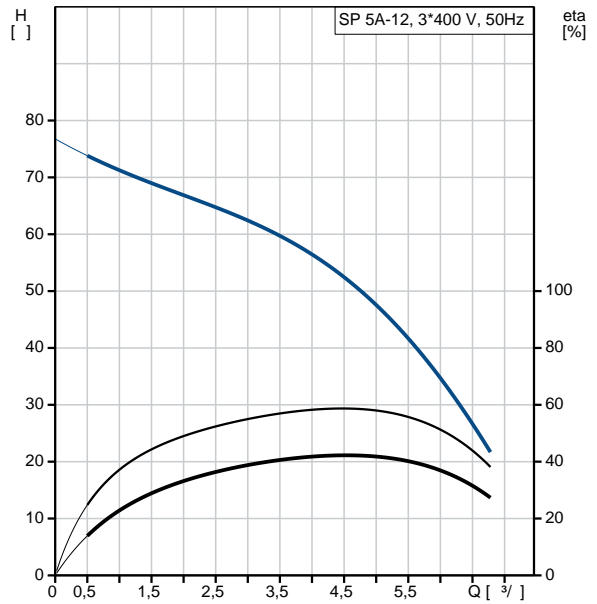

MEI :		0.50
ErP :	EuP	/ .
:		14
:		12.5
:		16.3 <sup>3</sup>

**5001912 SP 5A-12 50**

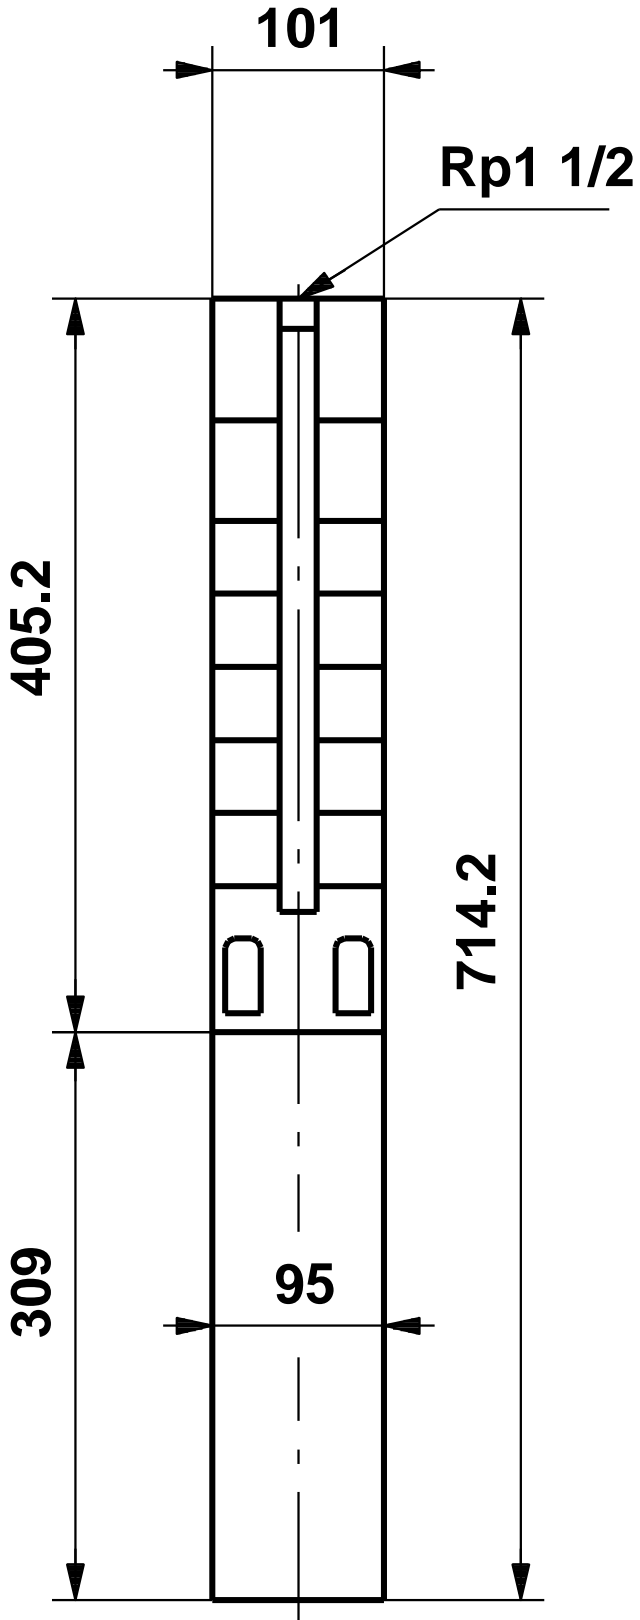

5001912 SP 5A-12 50



! [ ], .