

1 SP 5A-6N



: 5201906

, EN 1.4401 (AISI 316),
MS40000.75

40 °C.

MP204 Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
25
: SIC/SIC
: CE,EAC
- : ISO9906:2012 3B
: T40
: CYLINDRICAL


EN 1.4401
AISI AISI 316

EN 1.4401
AISI AISI 316





DIN W.-Nr. 1.4539
AISI 904 L

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 1.92-1.84-1.84 A
 : 430-480-510 %
 Cos - : 0.86-0.84-0.82
 : 2850-2870-2880 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195604
 :
 : MEI : 0.50
 ErP : EuP /
 : 17.8
 : 19.6
 : 16.3 ³
 C : DK
 : 8413702900

5201906 SP 5A-6N 50

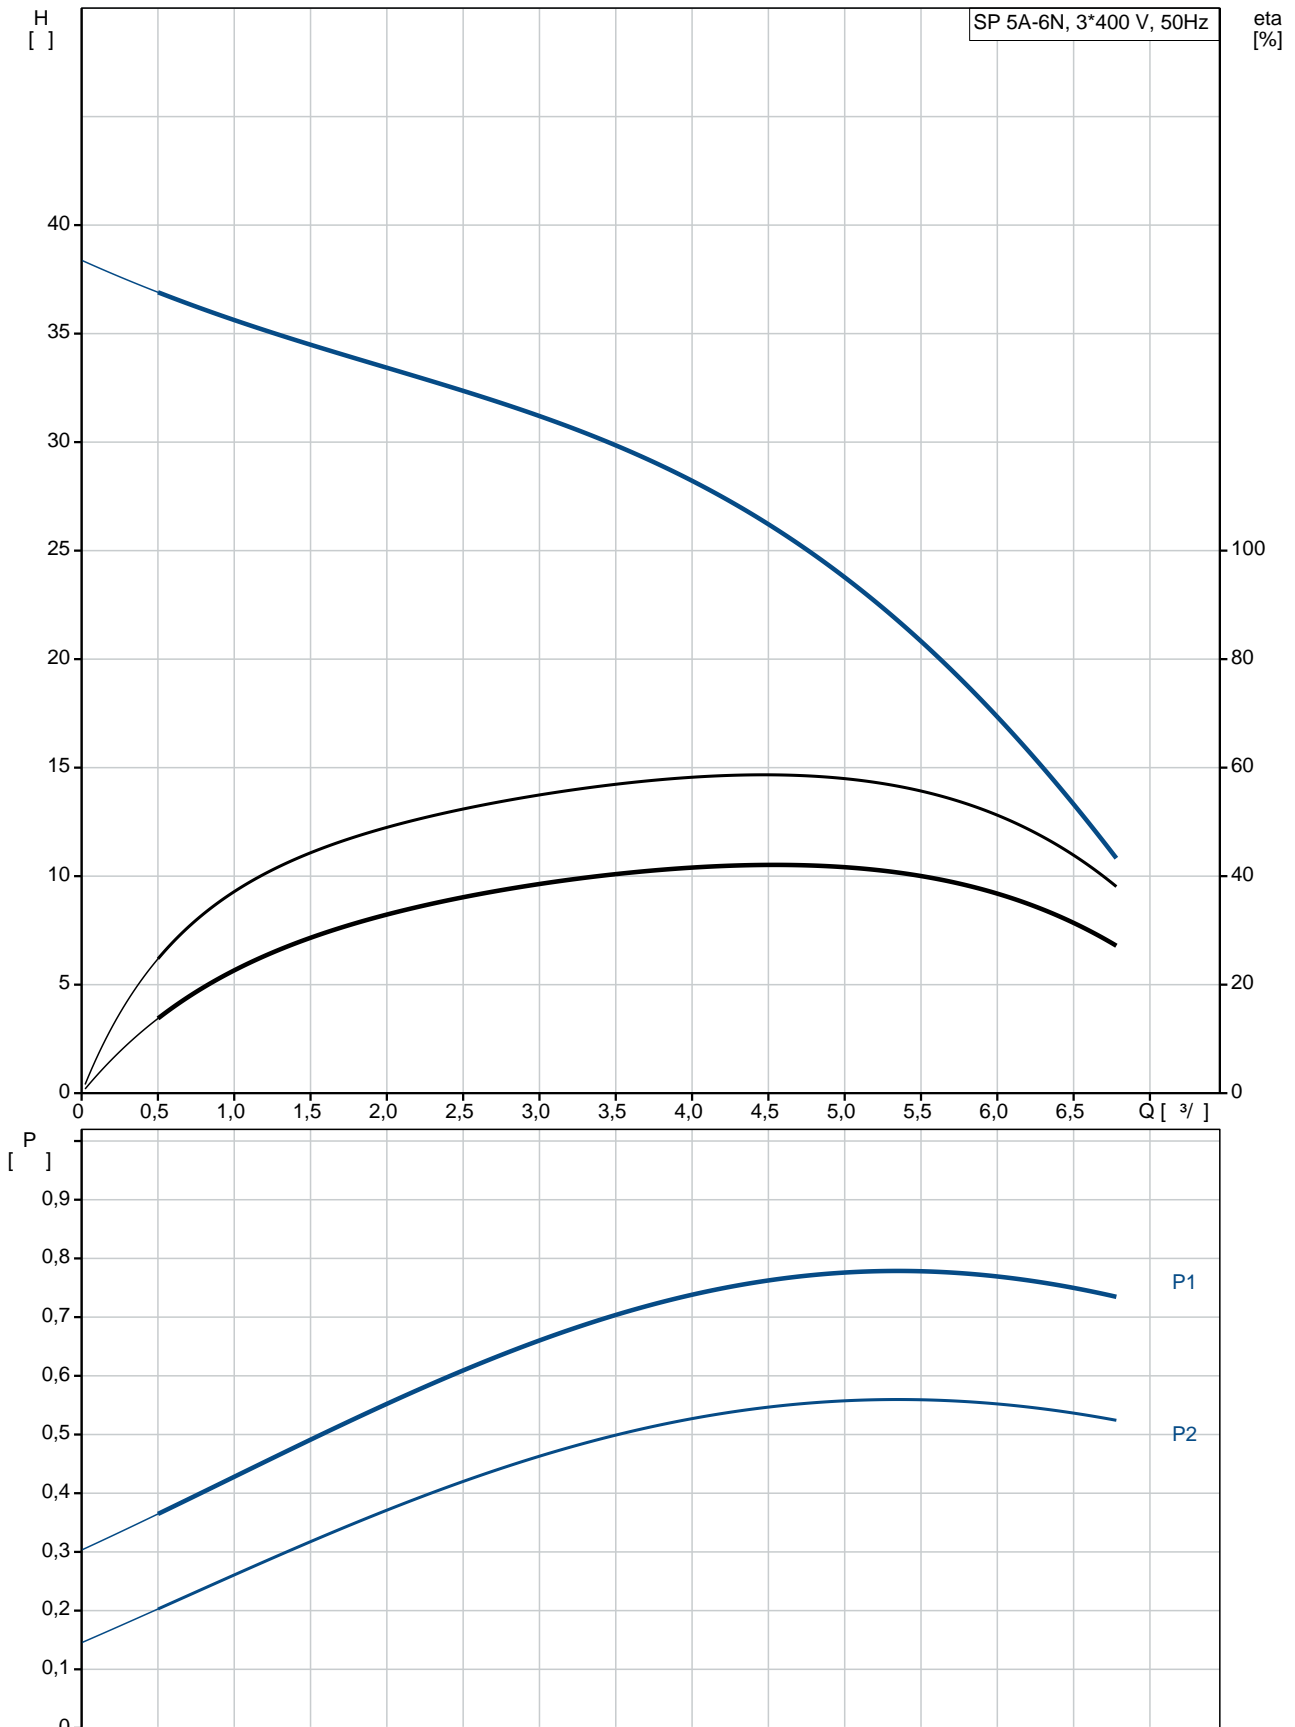


	SP 5A-6N
	5201906
EAN	5708601059377
	2900 /
	5 ^{3/}
	25
	6
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	CYLINDRICAL
	EN 1.4401
	AISI AISI 316
	EN 1.4401
	AISI AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS4000
	GRUNDFOS
- P2:	0.75
(2),	0.75
	50 Hz
	3 x 380-400-415
	1.92-1.84-1.84 A
	430-480-510 %
Cos	0.86-0.84-0.82
	2850-2870-2880 /
(IEC 34-5):	IP68
(IEC 85):	F
	79195604

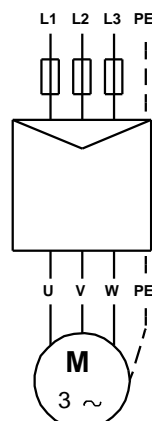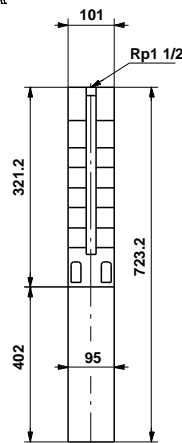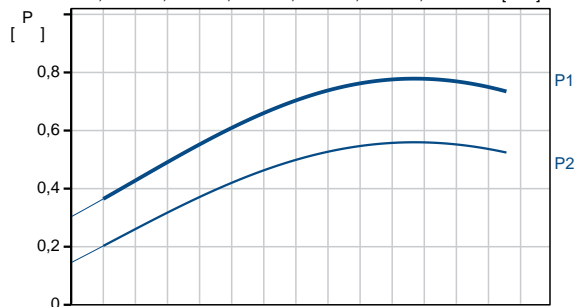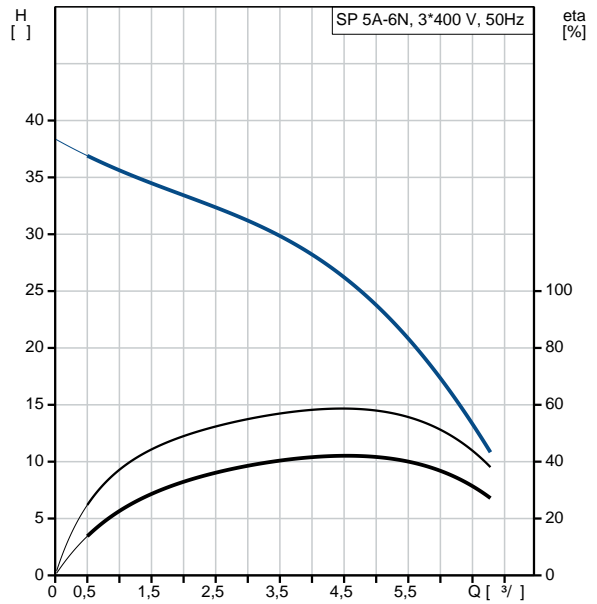

MEI :		0.50
ErP :	EuP	/ .
:		17.8
:		19.6
:		16.3 ³
C :	DK	
:		8413702900

5201906 SP 5A-6N 50

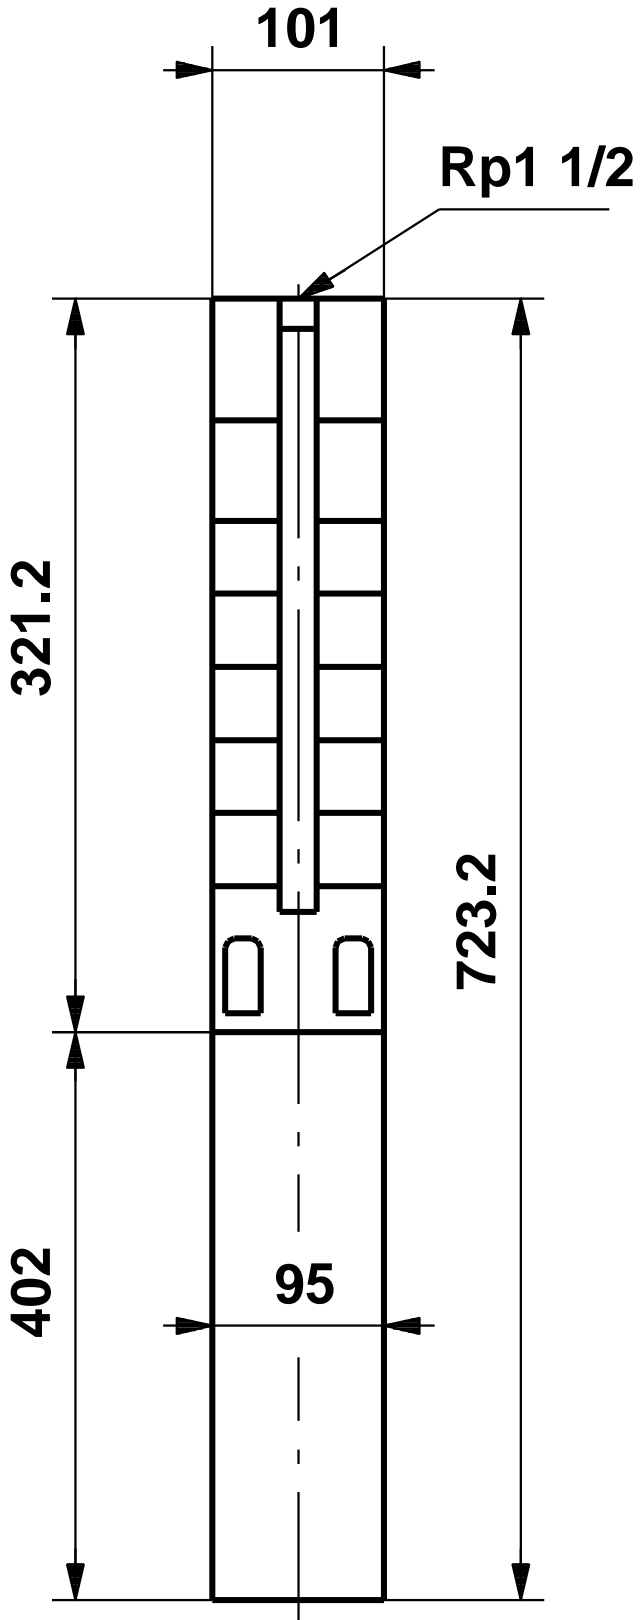

5201906 SP 5A-6N 50



! [], .