

1 SP 5A-8N



: 5201908

, EN 1.4401 (AISI 316),
MS40000.75

40 °C.

MP204 Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/₃₃
 : SIC/SIC
 : CE,EAC
 - : ISO9906:2012 3B
 : T40
 : CYLINDRICAL


EN 1.4401
AISI AISI 316

EN 1.4401
AISI AISI 316

DIN W.-Nr. 1.4539
AISI 904 L

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 0.75
 (2), : 0.75
 : 50 Hz
 : 3 x 380-400-415
 : 1.92-1.84-1.84 A
 : 430-480-510 %
 Cos - : 0.86-0.84-0.82
 : 2850-2870-2880 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195604
 :
 ErP : MEI : 0.50
 : EuP / .
 : 18.5
 : 20.3
 : 16.3 ³
 C : DK
 : 8413702900

5201908 SP 5A-8N 50

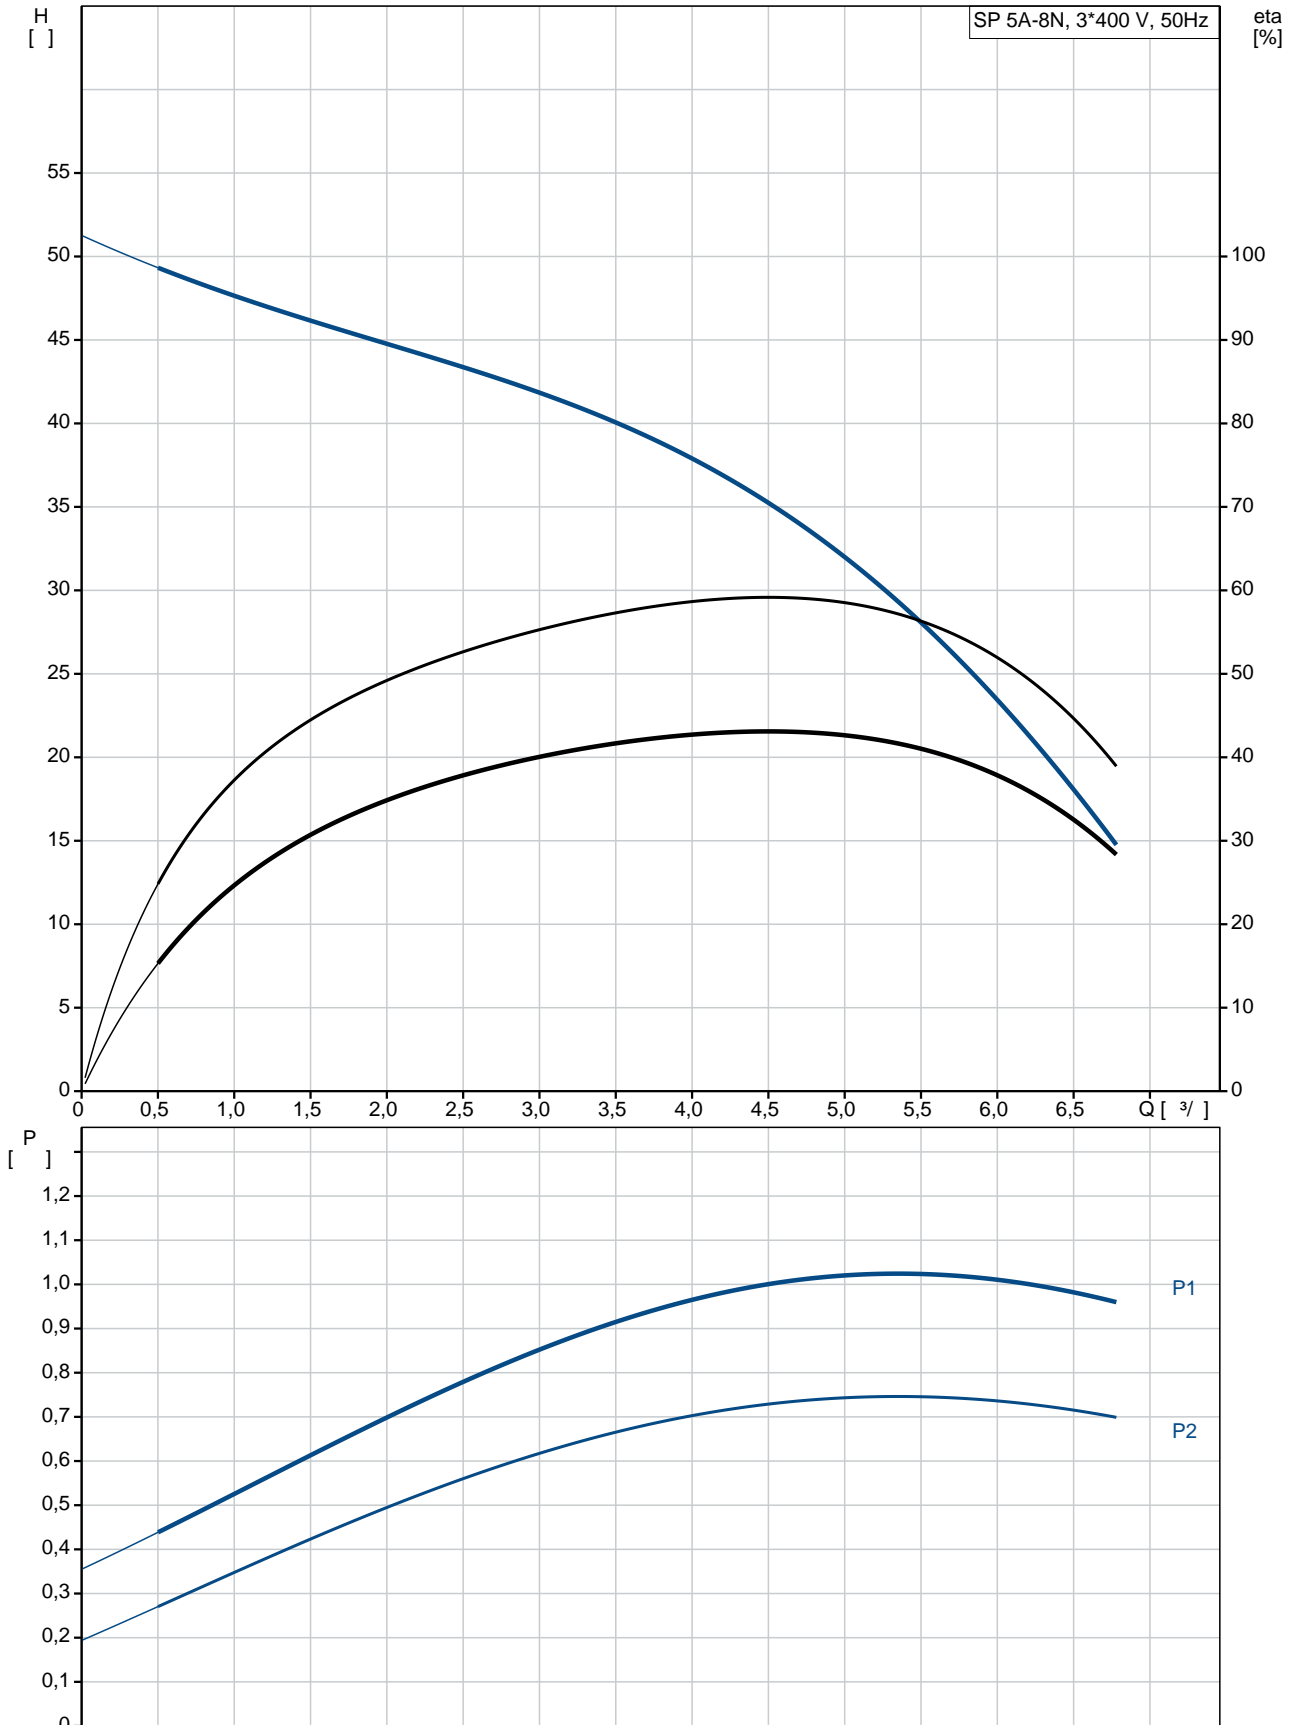

SP 5A-8N
 EAN : 5201908
 5708601059384
 2900 /
 5 3/
 33
 8
 NONE
 SIC/SIC
 CE,EAC
 ISO9906:2012 3B
 A
 YES
 T40
 CYLINDRICAL

EN 1.4401
 AISI AISI 316

EN 1.4401
 AISI AISI 316

DIN W.-Nr. 1.4539
 AISI 904 L

Rp1 1/2
 4 inch

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 20 °C
 998.2 / 3





MS4000
 GRUNDFOS

- P2: 0.75
 (2), 0.75

50 Hz
 3 x 380-400-415
 1.92-1.84-1.84 A
 430-480-510 %
 Cos - : 0.86-0.84-0.82
 2850-2870-2880 /


(IEC 34-5): IP68
 (IEC 85): F

79195604

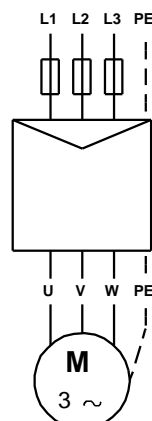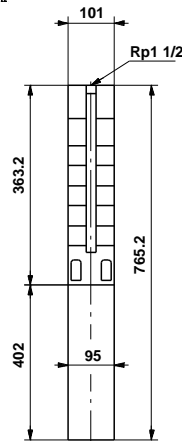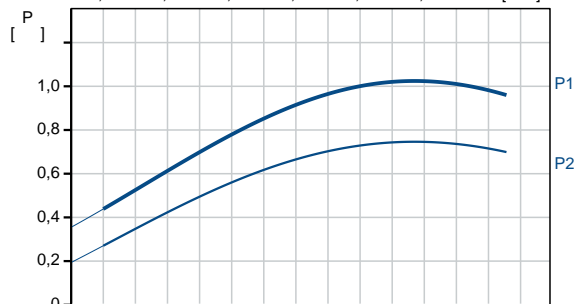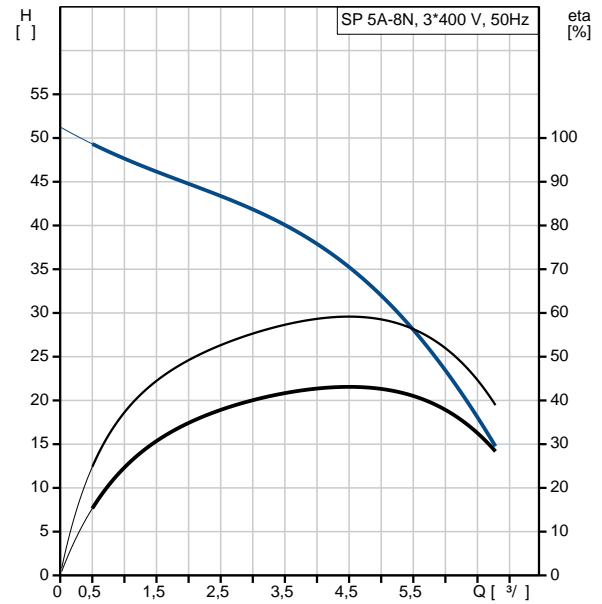

MEI :		0.50
ErP :	EuP	/ .
:		18.5
:		20.3
:		16.3 ³
C :	DK	
:		8413702900

5201908 SP 5A-8N 50

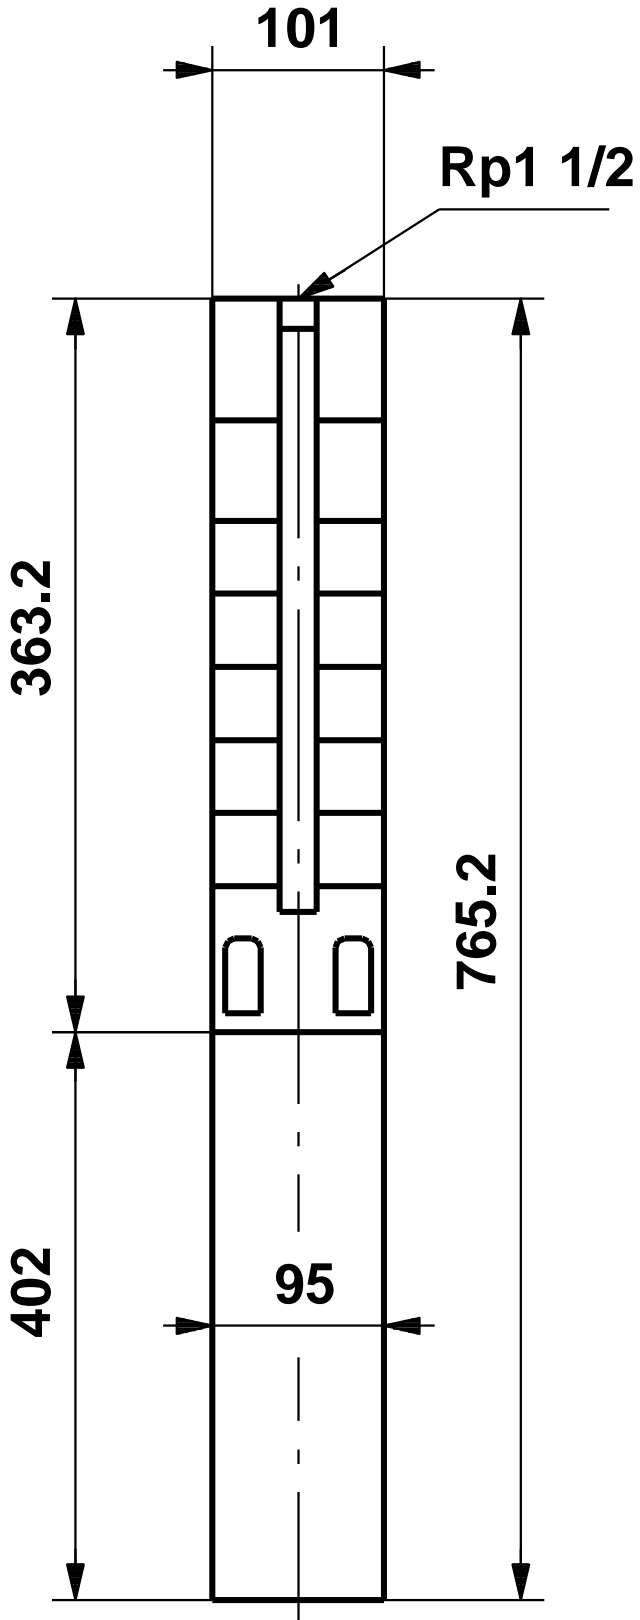

5201908 SP 5A-8N 50

