

1 SP 5A-12N



: 5201912

, EN 1.4401 (AISI 316),  
MS40001.1

40 °C.

MP204 Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 5 <sup>3</sup>/<sub>4</sub>  
 : 49  
 : SIC/SIC  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : CYLINDRICAL


EN 1.4401  
 AISI AISI 316

EN 1.4401  
 AISI AISI 316

DIN W.-Nr. 1.4539  
 AISI 904 L

: Rp1 1/2  
 : 4 inch  
 :  
 : MS4000  
 - P2: 1.1  
 ( 2), : 1.1  
 : 50 Hz  
 : 3 x 380-400-415  
 : 2.80-2.75-2.75 A  
 : 440-480-500 %  
 Cos - : 0.85-0.82-0.78  
 : 2850-2870-2880 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195605  
 :  
 ErP : MEI : 0.50  
 : EuP / .  
 : 20.7  
 : 22.5  
 : 16.3 <sup>3</sup>  
 C : DK  
 : 8413702900

## 5201912 SP 5A-12N 50

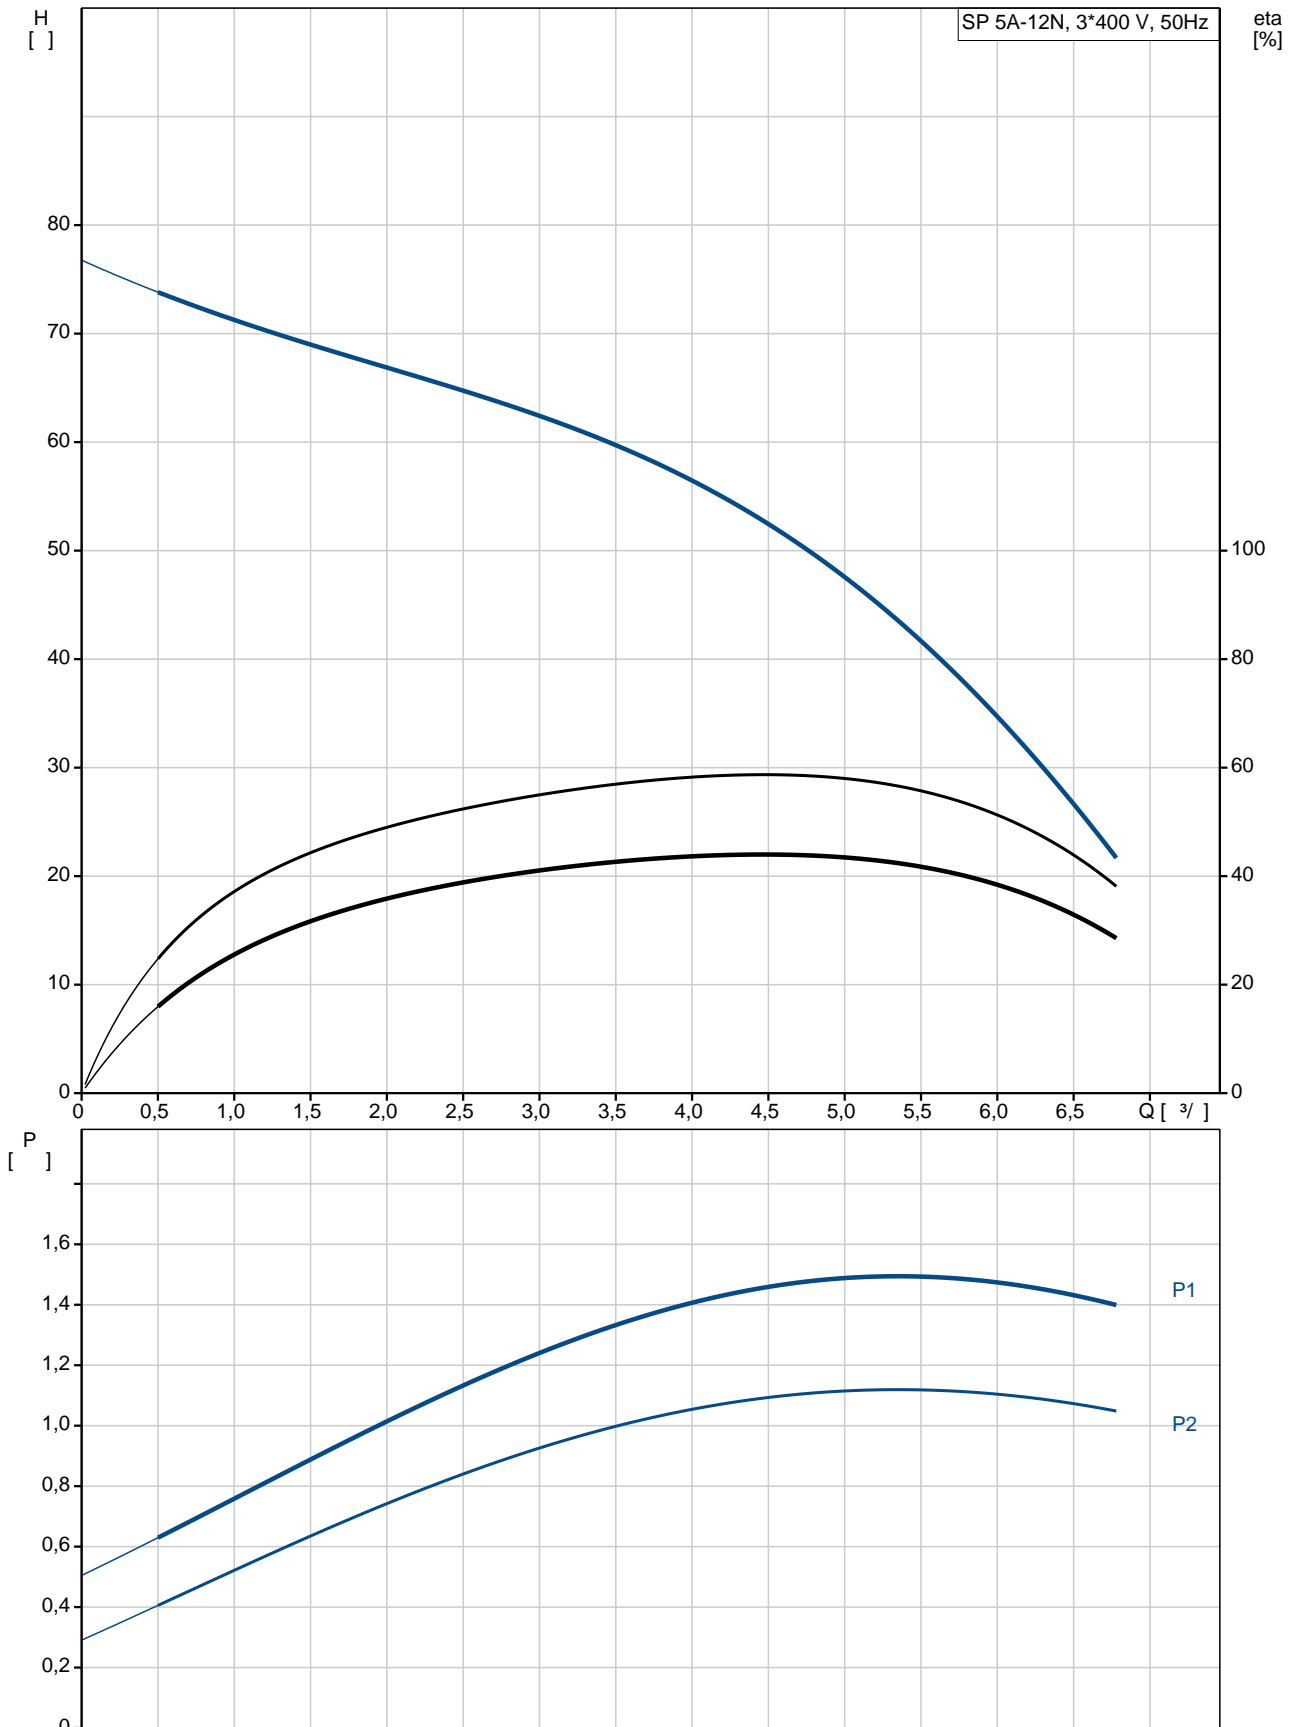

SP 5A-12N  
 EAN : 5201912  
 5708601059391  
 2900 /  
 5 3/  
 49  
 12  
 NONE  
 SIC/SIC  
 CE,EAC  
 ISO9906:2012 3B  
 A  
 YES  
 T40  
 CYLINDRICAL

EN 1.4401  
AISI AISI 316

EN 1.4401  
AISI AISI 316

DIN W.-Nr. 1.4539  
AISI 904 L

Rp1 1/2  
4 inch

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 20 °C  
 998.2 / 3

MS4000  
GRUNDFOS





- P2: 1.1  
( 2), 1.1

50 Hz  
 3 x 380-400-415  
 2.80-2.75-2.75 A  
 440-480-500 %

Cos - : 0.85-0.82-0.78  
 2850-2870-2880 /


(IEC 34-5): IP68  
 (IEC 85): F

79195605

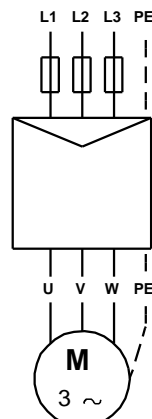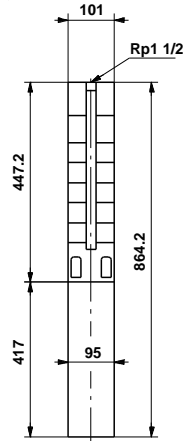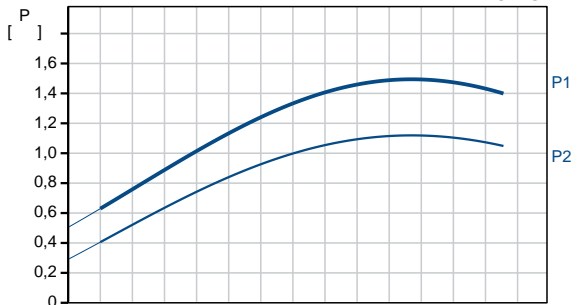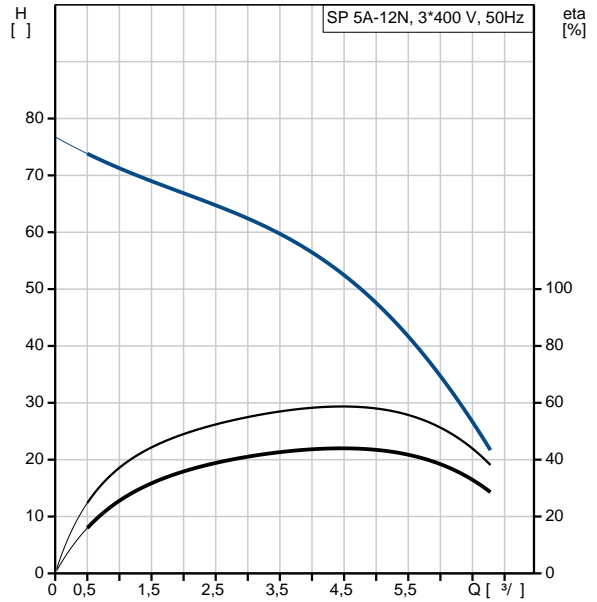


MEI :		0.50
ErP :	EuP	/ .
:		20.7
:		22.5
:		16.3 <sup>3</sup>
C :	DK	
:		8413702900

**5201912 SP 5A-12N 50**

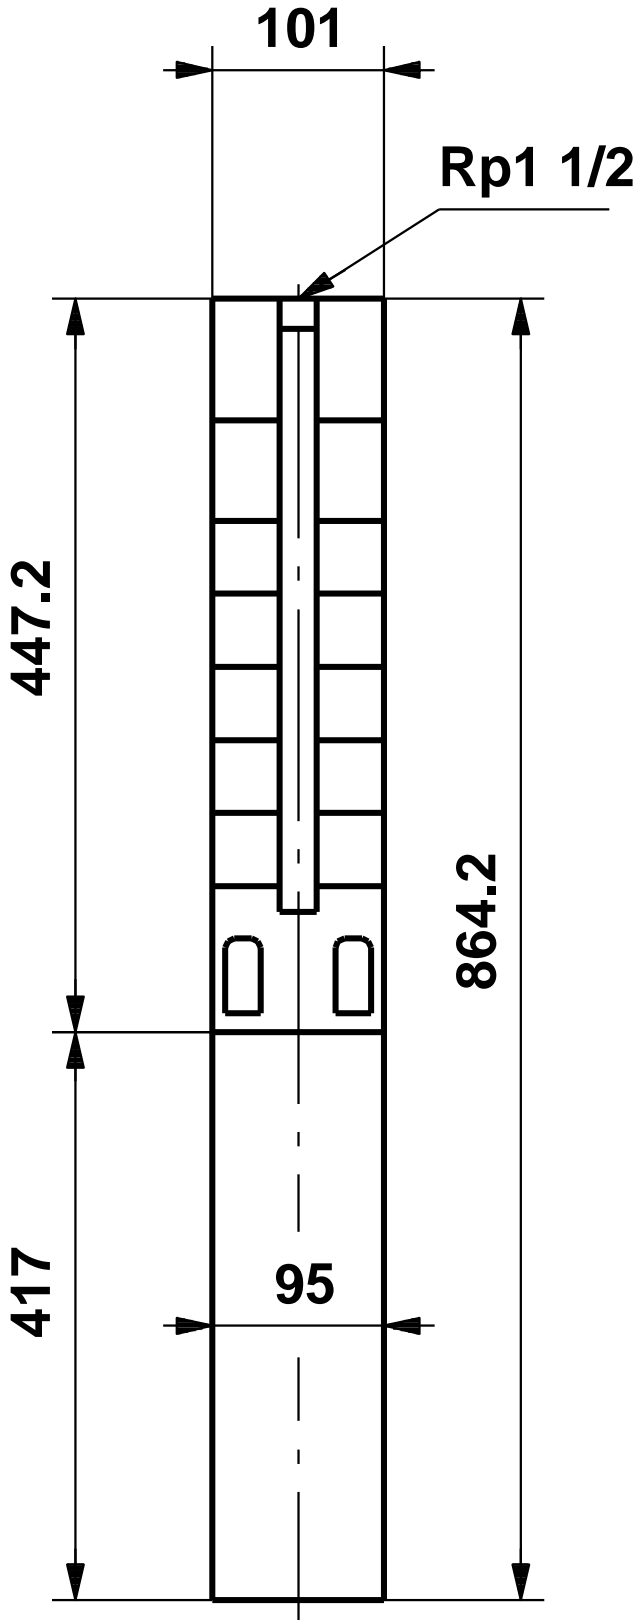

**5201912 SP 5A-12N 50**

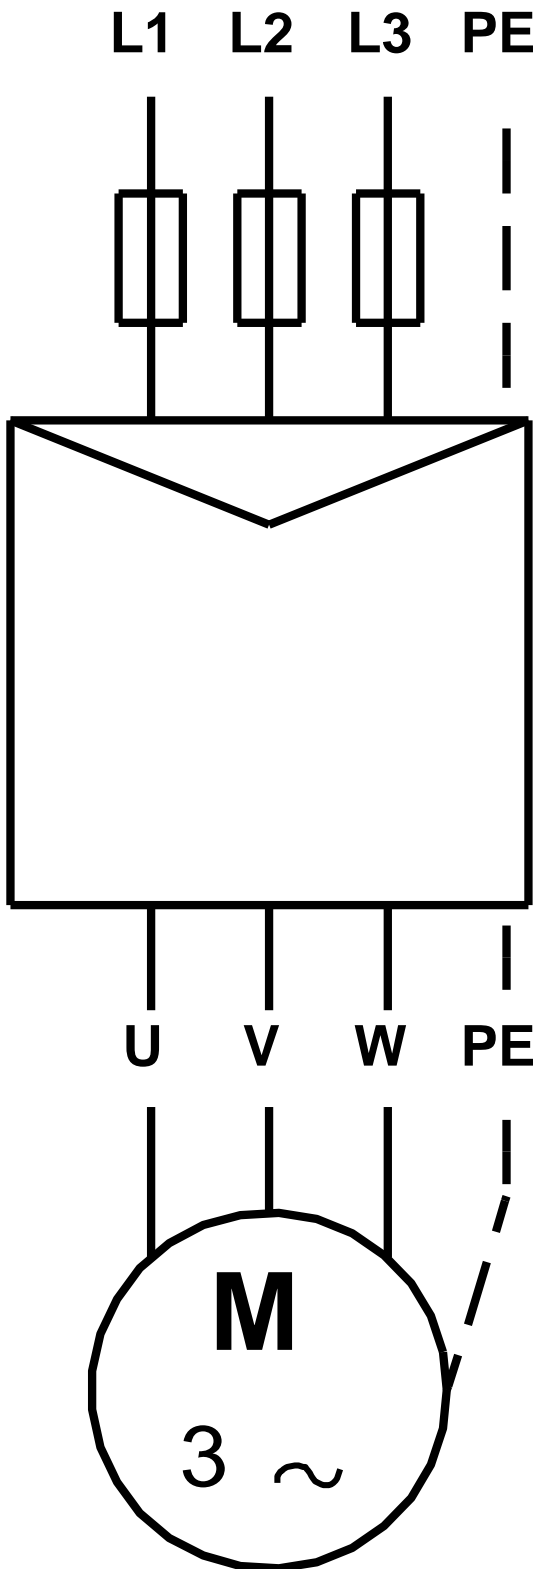

! [ ], .