

1 SP 5A-17N



: 5201917

, EN 1.4401 (AISI 316),  
MS40001.5

40 °C.

MP204 Grundfos Tempcon,  
(DOL).

Maximum liquid temperature: 40 °C  
 . t 0,15 / : 40 °C  
 : 998.2 / <sup>3</sup> : 20 °C

: 2900 /

: 5 <sup>3</sup>/<sub>70</sub>  
 : SIC/SIC  
 : CE,EAC  
 - : ISO9906:2012 3B  
 : T40  
 : CYLINDRICAL



EN 1.4401  
AISI AISI 316

EN 1.4401  
AISI AISI 316





DIN W.-Nr. 1.4539  
AISI 904 L

: Rp1 1/2  
 : 4 inch  
 :  
 : MS4000  
 - P2: 1.5  
 ( 2), : 1.5  
 : 50 Hz  
 : 3 x 380-400-415  
 : 3.95-4.00-4.10 A  
 : 410-430-440 %  
 Cos - : 0.84-0.78-0.74  
 : 2840-2860-2870 /  
 :  
 (IEC 34-5): IP68  
 (IEC 85): F  
 :  
 : 79195606  
 :  
 ErP : MEI : 0.50  
 : EuP / .  
 : 22.3  
 : 24.1  
 : 16.3 <sup>3</sup>  
 C : DK  
 : 8413702900

## 5201917 SP 5A-17N 50

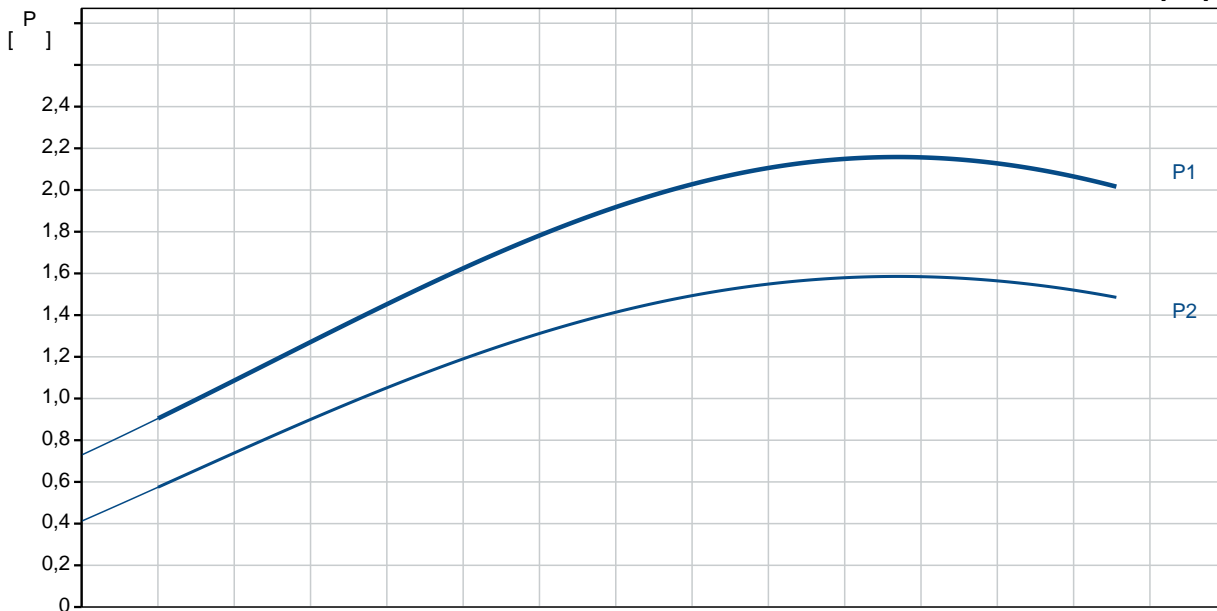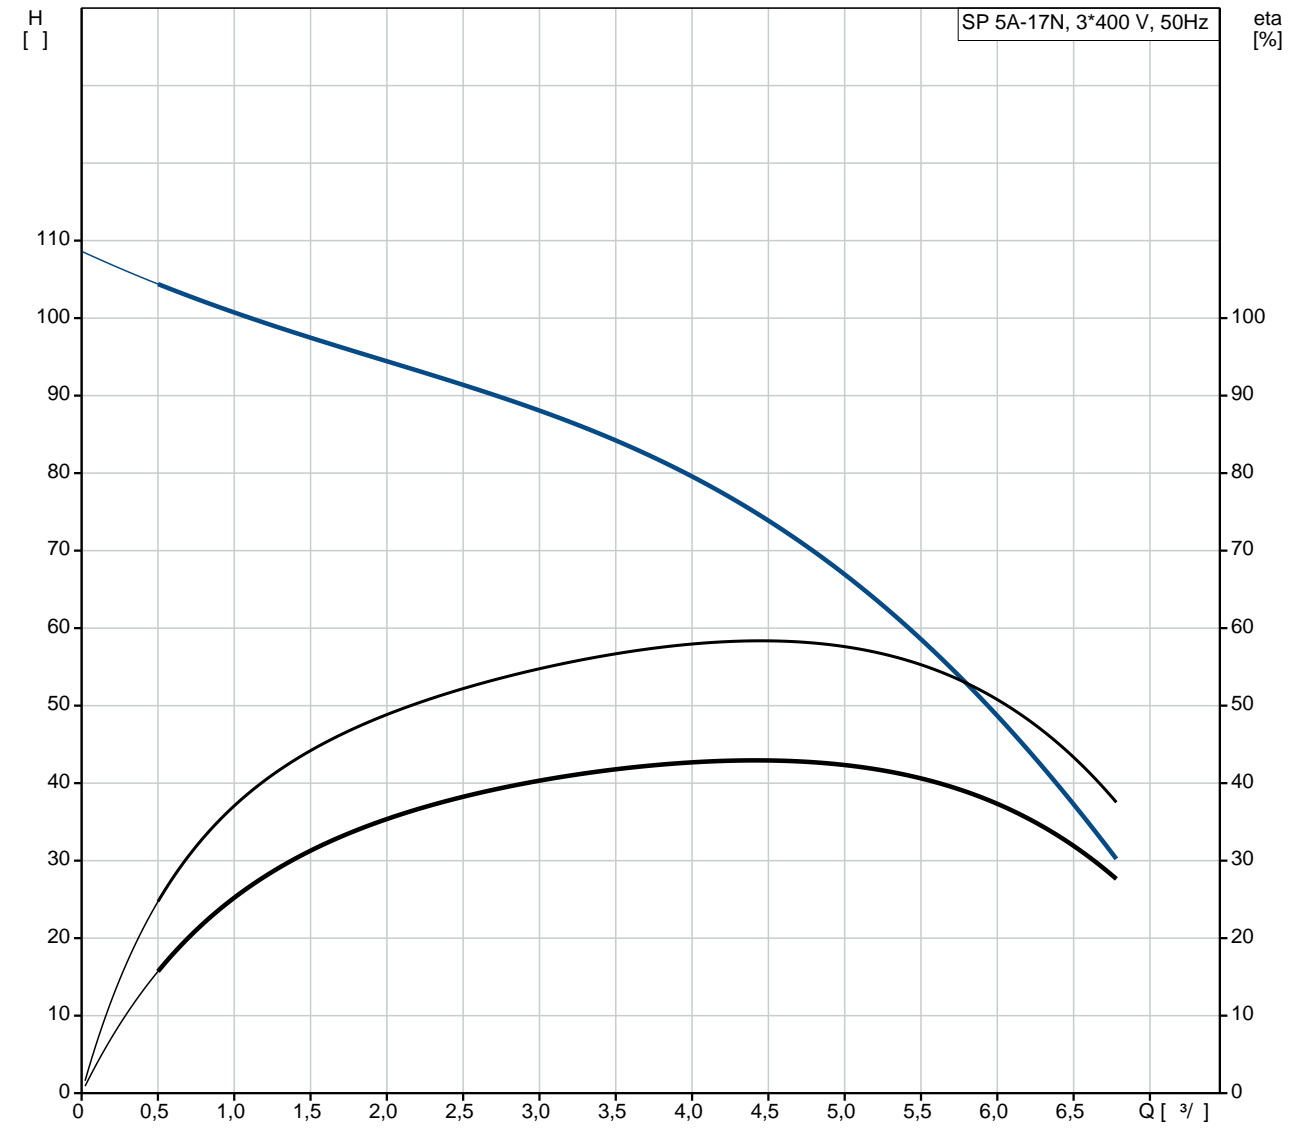


	SP 5A-17N
	5201917
EAN	5708601059407
	2900 /
	5 <sup>3/</sup>
	70
	17
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	CYLINDRICAL
	EN 1.4401
	AISI AISI 316
	EN 1.4401
	AISI AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / <sup>3</sup>
	MS4000
	GRUNDFOS
- P2:	1.5
( 2),	1.5
	50 Hz
	3 x 380-400-415
	3.95-4.00-4.10 A
	410-430-440 %
Cos	0.84-0.78-0.74
	2840-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	F
	79195606

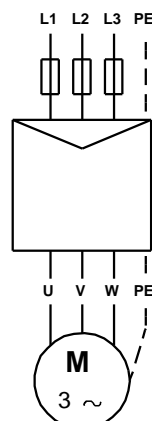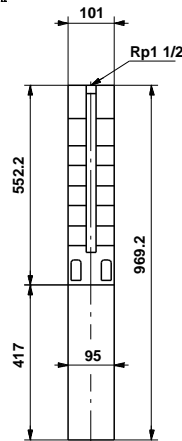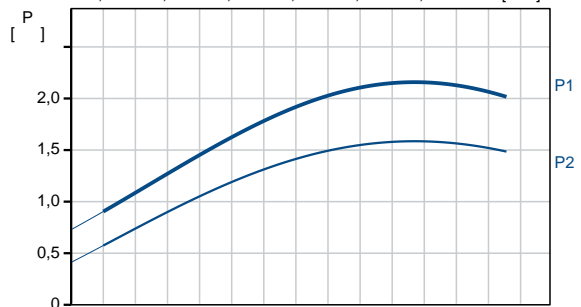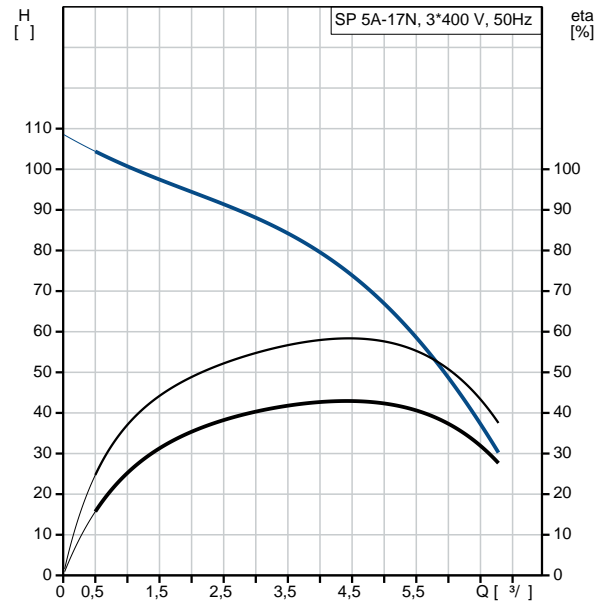


MEI :		0.50
ErP :	EuP	/ .
:		22.3
:		24.1
:		16.3 <sup>3</sup>
C :	DK	
:		8413702900

**5201917 SP 5A-17N 50**

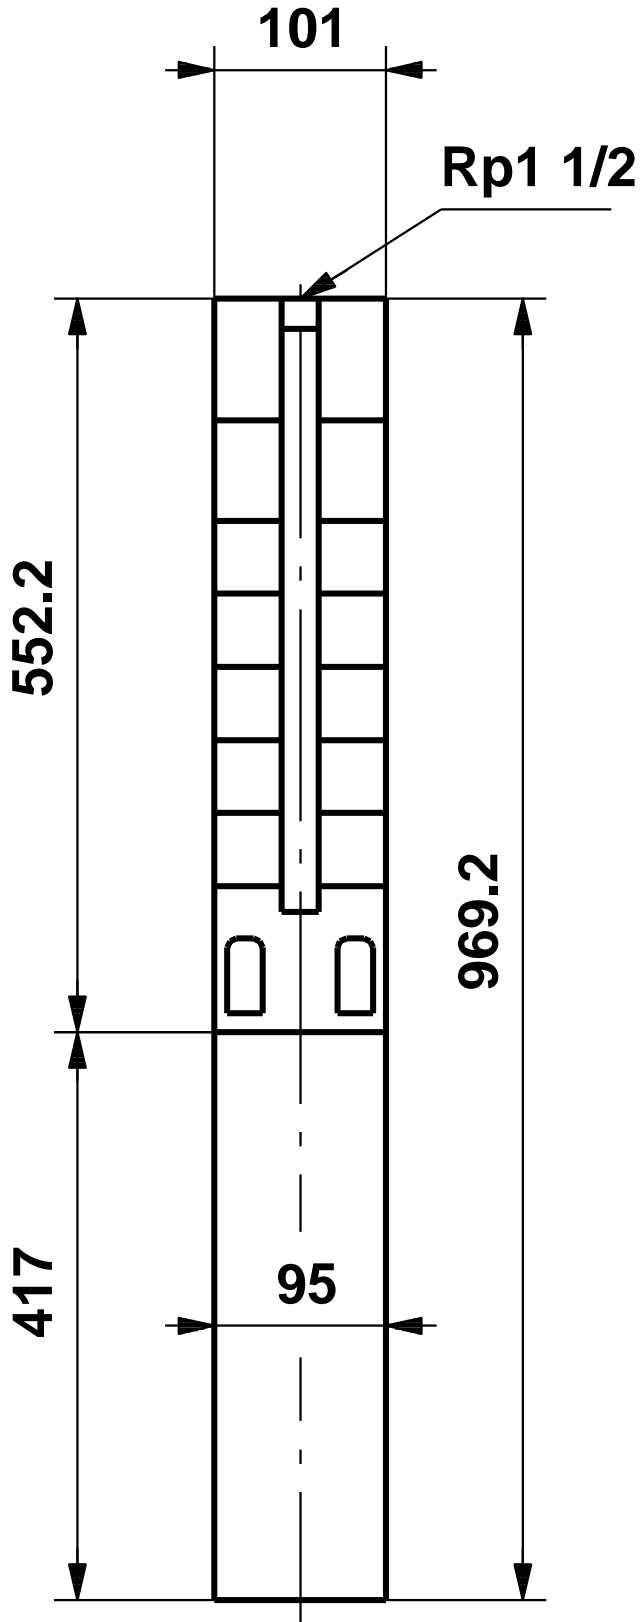

**5201917 SP 5A-17N 50**

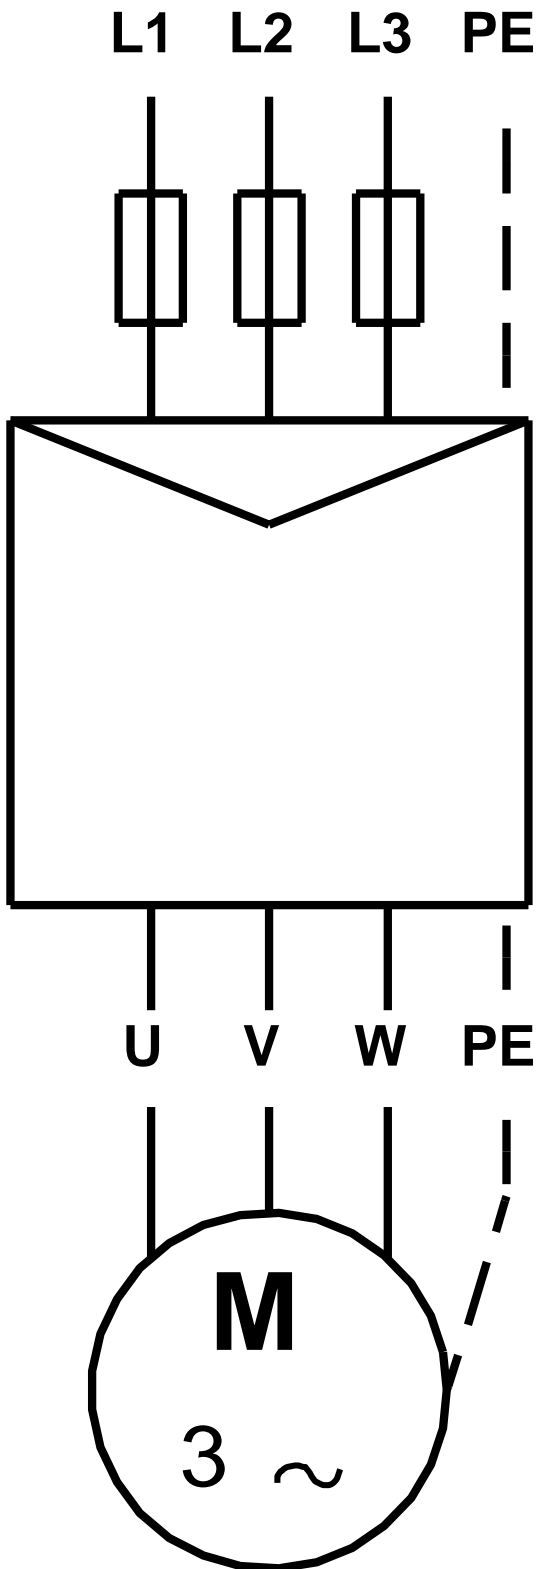

! [ ], .