

1 SP 5A-21N



: 5201921

, EN 1.4401 (AISI 316),
MS40002.2

40 °C.

MP204 Grundfos Tempcon,
(DOL).

Maximum liquid temperature: 40 °C
 . t 0,15 / : 40 °C
 : 998.2 / ³ : 20 °C

: 2900 /

: 5 ³/
86
: SIC/SIC
: CE,EAC
- : ISO9906:2012 3B
: T40
: CYLINDRICAL



EN 1.4401
AISI AISI 316

EN 1.4401
AISI AISI 316





DIN W.-Nr. 1.4539
AISI 904 L

: Rp1 1/2
 : 4 inch
 :
 : MS4000
 - P2: 2.2
 (2), : 2.2
 : 50 Hz
 : 3 x 380-400-415
 : 5.75-6.00-6.30 A
 : 440-450-450 %
 Cos - : 0.82-0.76-0.71
 : 2840-2860-2870 /
 :
 (IEC 34-5): IP68
 (IEC 85): F
 :
 : 79195607
 :
 : MEI : 0.50
 ErP : EuP /
 : 25.3
 : 27.1
 : 21.7 ³
 C : DK
 : 8413702900

5201921 SP 5A-21N 50

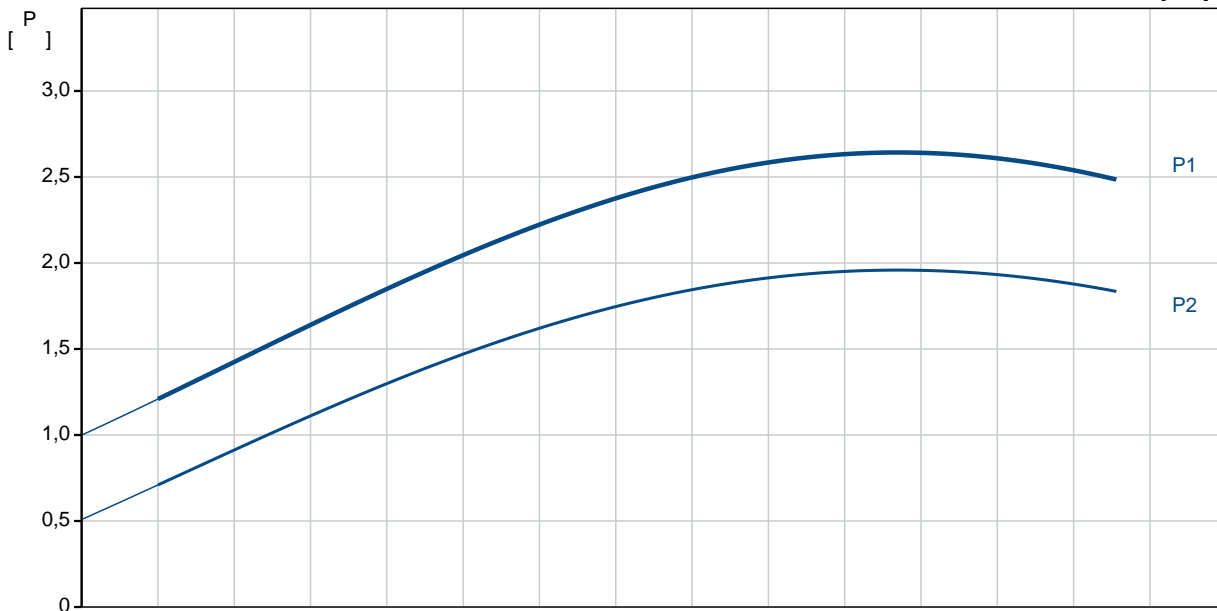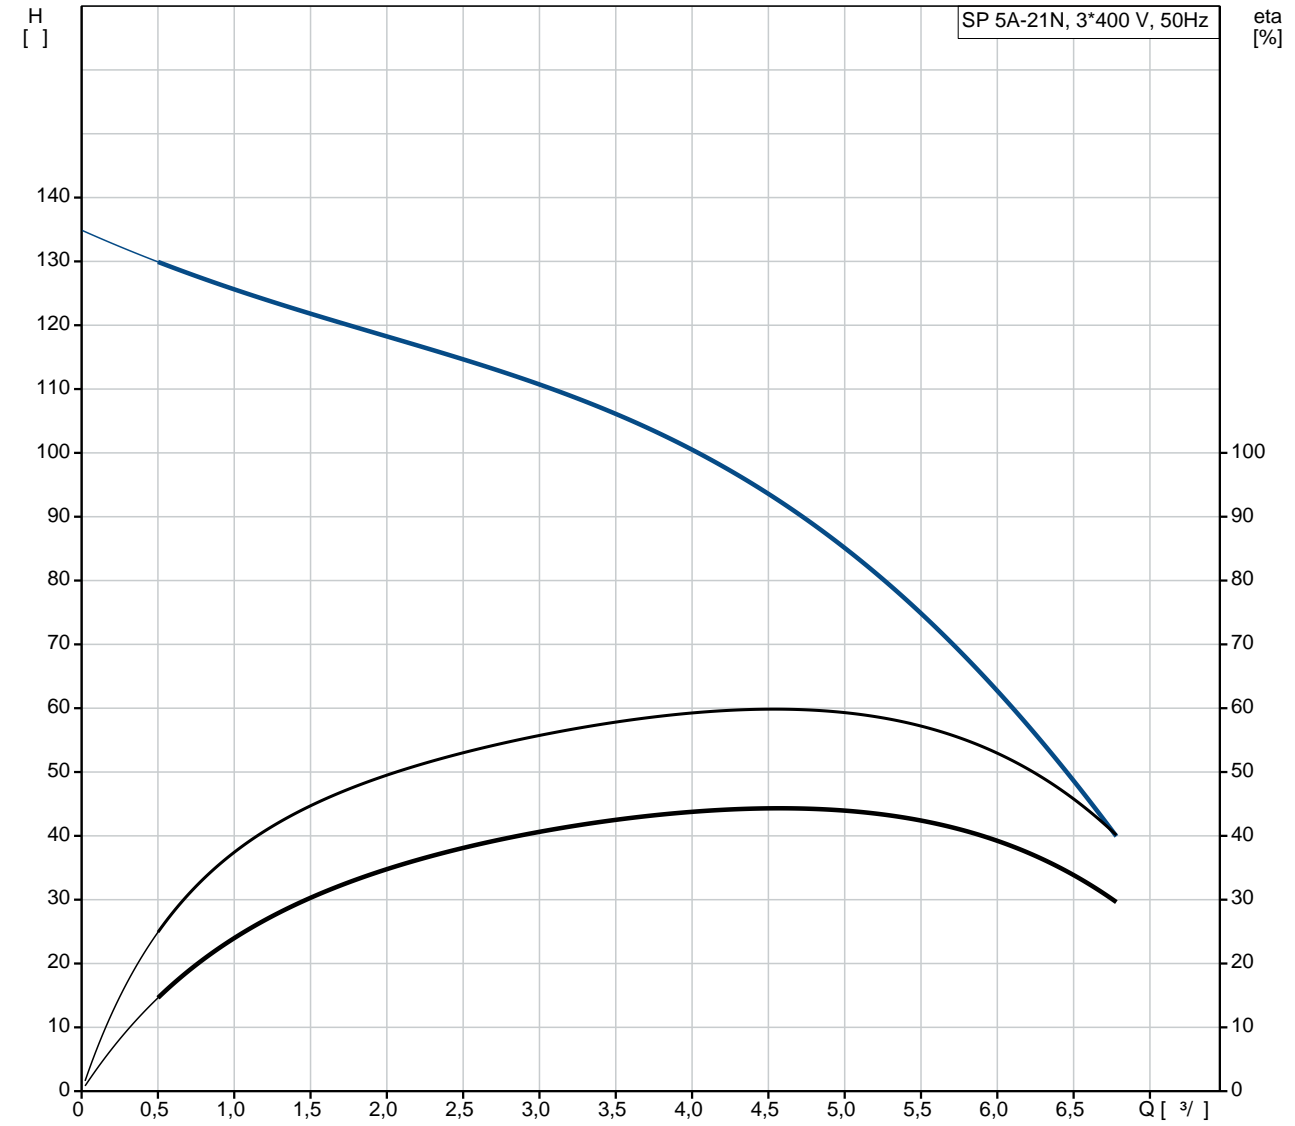


	SP 5A-21N
	5201921
EAN	5708601059414
	2900 /
	5 ^{3/}
	86
	21
	NONE
	SIC/SIC
	CE,EAC
	ISO9906:2012 3B
	A
	YES
	T40
	CYLINDRICAL
	EN 1.4401
	AISI AISI 316
	EN 1.4401
	AISI AISI 316
	DIN W.-Nr. 1.4539
	AISI 904 L
	Rp1 1/2
	4 inch
Maximum liquid temperature:	40 °C
. t 0,15 /	40 °C
	20 °C
	998.2 / ³
	MS4000
	GRUNDFOS
- P2:	2.2
(2),	2.2
	50 Hz
	3 x 380-400-415
	5.75-6.00-6.30 A
	440-450-450 %
Cos	0.82-0.76-0.71
	2840-2860-2870 /
(IEC 34-5):	IP68
(IEC 85):	F
	79195607

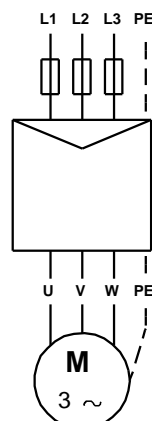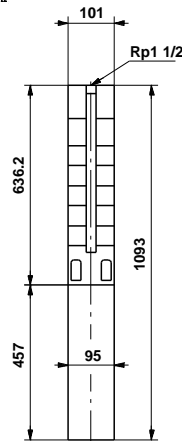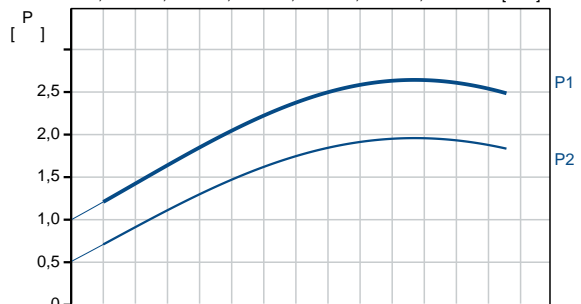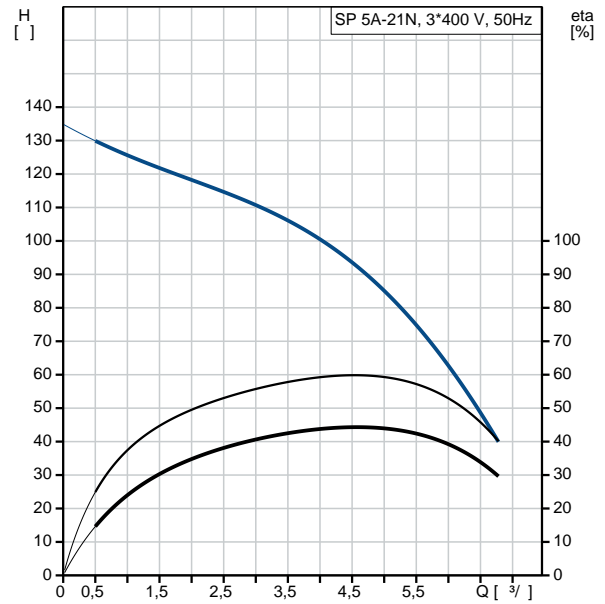


		MEI :	0.50
ErP	:	EuP	/ .
	:		25.3
	:		27.1
	:		21.7 ³
C	:	DK	
	:		8413702900

5201921 SP 5A-21N 50

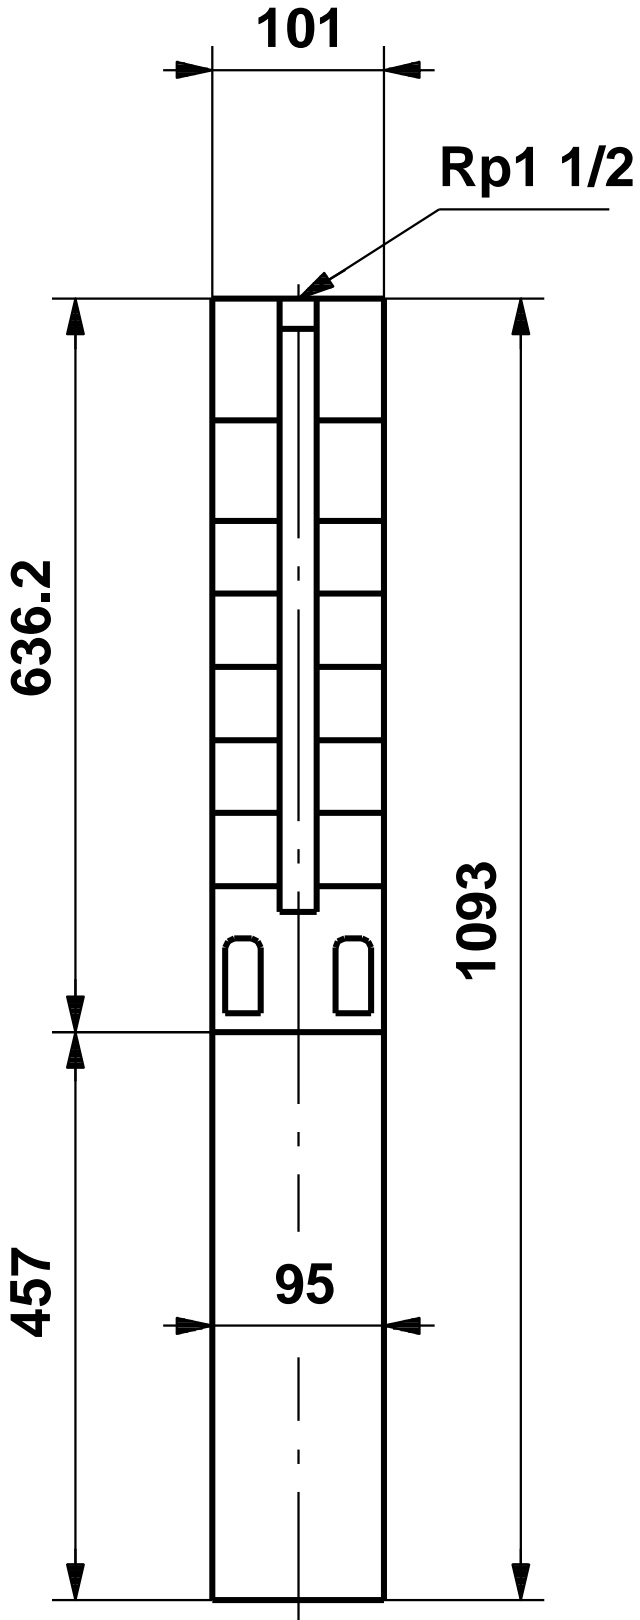

5201921 SP 5A-21N 50

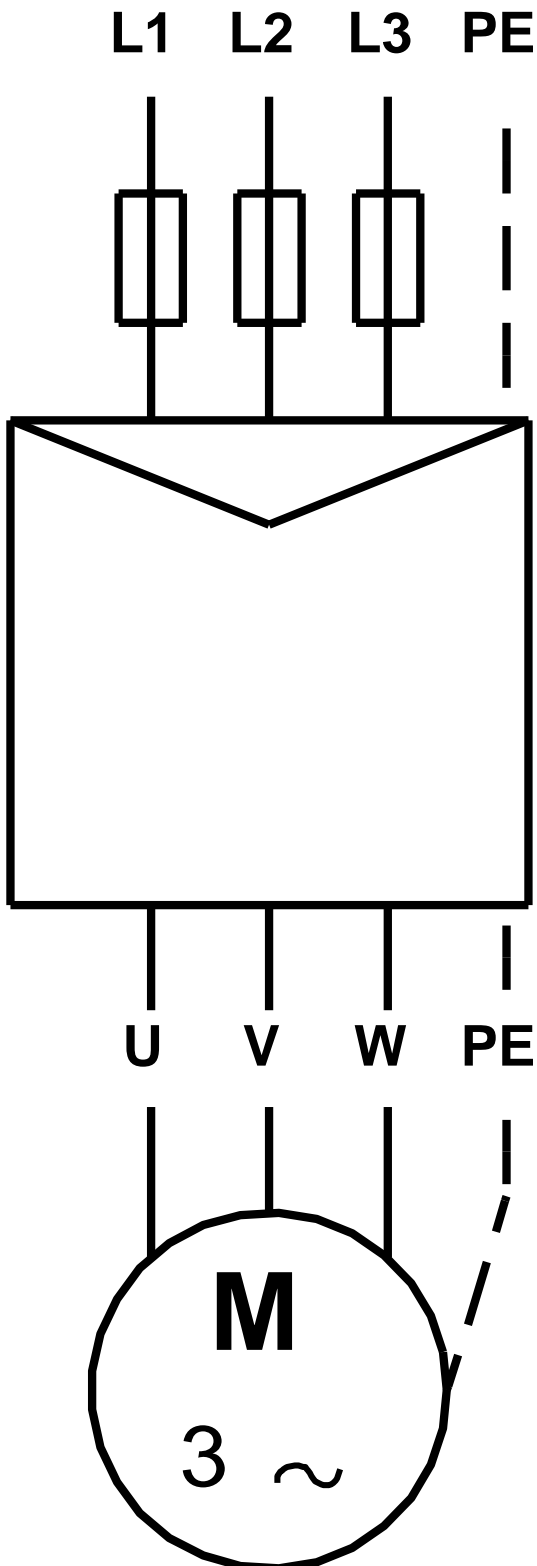

! [], .